

MasterCut

Tool Corp.

World Class
Manufacturer of
Rotary Cutting Tools



1985-2020




FRACTIONAL PRODUCT CATALOG
ENDMILLS • DRILLS • REAMERS • ROUTERS • BURS



**Please contact us
for our full line of
metric products**



Metric catalog available in the following languages:



Chinese
French
German
Italian
Japanese

Korean
Portuguese
Russian
Spanish



About Mastercut

Our History

- 1985 – Incorporated in Safety Harbor, FL
- 1989 – First CNC machine purchased
- 1995 – Laser marking and laser inspection systems implemented
- 1999 – Cell concept introduced in a new facility
- 2003 – In-house tool coatings implemented
- 2003 – ISO 9001:2000 certification achieved
- 2004 – MAP, Mastercut’s Automated Production developed
- 2005 – CNC 1st team (Customers’ Needs Come 1st) implemented
- 2009 – ISO 9001:2008 certification achieved
- 2013 – Nano coatings and ultra-performance tools introduced
- 2015 – Mastercut celebrates 30th anniversary, and facility expansion
- 2016 – Warehouse expansions in USA and Europe
- 2018 – ISO 9001:2015 certification achieved

Today

Mastercut Tool Corp. celebrates more than 3 decades as a world class carbide cutting tool manufacturer. From inception to the present, our goal is providing the highest quality products and services to our customers. All products are still manufactured in Florida, using state of the art equipment, skilled craftsmen and our exclusive MAP technology.

Our Thanks to Our Loyal Customers and Associates

Our history would not be possible without the support of all those associated with us. We thank all of our customers and associates, as well as our community, for your dedication and loyalty. We pledge to continuously improve for you!
















Please check out the following catalogs and services:

- Metric carbide tooling
- Solid carbide fractional and metric routers
- Capabilities to produce your special tools for all applications
- Authorized reconditioning factory for complete regrind and reconditioning services

TABLE OF CONTENTS

Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
H	K	S	N	M	P	

STANDARD ENDMILLS (Page 8)

	Square Endmills	10	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball Endmills	13	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Corner Radius Endmills	16	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	6 Flute Square Endmills	24			Cast Iron K	Titanium S		Stainless M	Steel P
	Square End - Double End Endmills	25	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End - Double End Endmills	27	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Square End - Double End Endmills w/ Flat	29	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End - Double End Endmills w/ Flat	29	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	90° Drill Mills	30	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Square End, Straight Flute Endmills	31		Hardened H	Cast Iron K				Steel P
	Ball End, Straight Flute Endmills	31		Hardened H	Cast Iron K				Steel P
	Square End Mini Mills	32	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End Mini Mills	33	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Square End Taper Mills	34	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End Taper Mills	35	Cermet		Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P

Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
H	K	S	N	M	P	

HIGH PERFORMANCE ENDMILLS (Page 36)









	High Performance Features	38							
	V4 Square Endmills	40	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	V4 Ball Endmills	42	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	V4 Corner Radius Endmills	44	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	V5 Square Endmills	50	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	V5 Ball Endmills	51	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	V5 Corner Radius Endmills	52	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	HY5 Square Endmills	57	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P
	HY5 Corner Radius Endmills	59	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P

TABLE OF CONTENTS

HIGH PERFORMANCE ENDMILLS Continued































	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	C	H	K	S	N	M	P
 F45 6FL Square Endmills 65	C	H	K	S		M	P
 F45 6FL Corner Radius Endmills 66	C	H	K	S		M	P
 Mold Mills, Corner Radius Necked 67	C	H	K	S		M	P
 Mold Mills, CR Necked Long 68	C	H	K	S		M	P
 Mold Mills, Ball Necked 69	C	H	K	S		M	P
 Mold Mills, Square Necked 70	C	H	K	S		M	P
 3FL 60° Helix TwisterMills 71				S		M	P
 Fine Pitch Roughers 72	C	H	K	S	N	M	P
 Medium Pitch Roughers 73	C	H	K	S	N	M	P
 Coarse Pitch Roughers 74	C	H	K	S	N	M	P
 Square End AxMills 75					N		
 Ball End AxMills 80					N		
 Corner Radius AxMills 83					N		
 Square End Chipbreaker AxMills 92					N		
 Ball End Chipbreaker AxMills 93					N		
 Square End Necked AxMills 94					N		
 Ball End Necked AxMills 95					N		
 Corner Radius Necked AxMills 96					N		
 45° Hypermills 97					N		
 55° AlumaZips 97					N		

TABLE OF CONTENTS

Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
H	K	S	N	M	P	

ULTRA PERFORMANCE ENDMILLS (Page 98)

	V4 Ultra Square Endmills . . . <i>V4®</i>	100	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	V4 Ultra Ball Endmills . . . <i>V4®</i>	101	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	V4 Ultra Corner Radius Endmills. . . <i>V4®</i>	102	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	V5 Ultra Square Endmills . . . <i>V5*</i>	103	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	V5 Ultra Ball Endmills . . . <i>V5*</i>	104	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	V5 Ultra Corner Radius Endmills. . . <i>V5*</i>	105	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	HY5 Ultra Square Endmills . . . <i>HY5</i>	106	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	HY5 Ultra Corner Radius Endmills. . . <i>HY5</i>	107	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	F45 Ultra Square Endmills. . . <i>F45</i>	108	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel
	F45 Ultra Corner Radius Endmills . . . <i>F45</i>	109	Cermet	Hardened	Cast Iron	Titanium	Stainless	Steel

HIGH PERFORMANCE ROUTERS (Page 110)





















	2 Flute Compression Routers.112	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	2 Flute Compression Chipbreaker Routers113	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	3 Flute Compression Routers.114	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	4 Flute Combination Compression Routers.115	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	4 Flute Compression Routers.116	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	4 Flute Fiberglass Mill End Routers117	Fiberglass					
	Fiberglass and Composite Finishers118	Fiberglass					
	OFX O-Flute Xtreme Routers119					Plastics	
	CVD Nano Crystalline Routers120	CRFP	Graphite	Composite		Carbon Fiber	Honeycomb

TABLE OF CONTENTS

CARBIDE DRILLS (Page 122)		Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Jobber Drills 124	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Stub Drills. 129	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Straight Flute Drills. 133	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Spade Drills. 134	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	NC Spotting Drills. 135	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Drill and Countersink / Center Drills 135	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Countersinks, Single Flute 136			Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Countersinks, Three Flute 136			Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Countersinks, Six Flute 137			Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Chamfer Tools 137		Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P

HIGH PERFORMANCE HURRICANE DRILLS (Page 138)

	Hurricane 3XD Solid & Coolant Through 140	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Hurricane 5XD Solid & Coolant Through 144	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Hurricane 8XD Coolant Through 150	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P

REAMERS (Page 154)


















	Straight Flute Reamers - 4 Flute 156	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Straight Flute Reamers - 6 Flute 157	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P

TABLE OF CONTENTS

BURS (Page 158)		Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
		H	K	S	N	M	P	
	SA Burs - Cylindrical Shape, No Endcut 160	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SB Burs - Cylindrical Shape with End Cut 161	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SC Burs - Radius Cylindrical Shape 162	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SD Burs - Ball Shape 163	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SE Burs - Oval Shape 164	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SF Burs - Radius Tree Shape 165	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SG Burs - Pointed Tree Shape. 166	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SH Burs - Flame Shape 167	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SJ Burs - 60° Included Cone Shape 168	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SK Burs - 90° Included Cone Shape 169	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SL Burs - Radius Cone Shape 170	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SM Burs - Pointed Cone Shape. 171	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SN Burs - Inverted Cone Shape 172	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	Die Mills 173	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	Piloted Die Mills 173	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel

BUR ROUTERS (Page 174)


	Fiberglass Routers 174	Fiberglass	Graphite	Composite	Carbon Fiber	Honeycomb
---	----------------------------------	------------	----------	-----------	--------------	-----------

TABLE OF CONTENTS

SPECIAL APPLICATION BURS



Tire Burs 175

NA

BUR SETS & DISPLAYS (Page 176)



8-12 Piece Plastic Box Bur Sets 176

3-5 Piece Power Pouch Bur Sets 176

24 Piece Countertop Displays 177

Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
H	K	S	N	M	P	
Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
H	K	S	N	M	P	
Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
H	K	S	N	M	P	

TECHNICAL INFORMATION (Page 178)

Quality Processes 179

Premier Coatings 180

Troubleshooting Guides. 182

Material Groupings 188

Technical Information for Endmills 190

Technical HP Router Information 194

Technical Information for Reamers 196

Technical Information for HP Drills 197

TERMS AND CONDITIONS (Page 198)

Terms and Conditions 198

Metric Sizes Available
Ask for our metric catalog today!

STANDARD ENDMILLS

- **Square End**
- **Ball End**
- **Corner Radius**
- **Double End**
- **Drill Mills**
- **Mini Mills**
- **TaperMills**


















Customers' Needs Come First















Customers' Needs Come First! This is what truly matters to us. To ensure you the fastest possible service, we have assembled simulation, engineering, production scheduling, and inventory personnel into one unit, wherein they can collaborate on any and all special requests from you, the moment your request is received. They are dedicated and qualified to assist you with solutions, fast!



TABLE OF CONTENTS

	Square Endmills	10	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball Endmills	13	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Corner Radius Endmills	16	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	6 Flute Square Endmills	24		Cast Iron K	Titanium S		Stainless M	Steel P
	Square End - Double End Endmills	25	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End - Double End Endmills	27	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Square End - Double End Endmills w/ Flat	29	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End - Double End Endmills w/ Flat	29	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	90° Drill Mills	30	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Square End, Straight Flute Endmills	31	Hardened H	Cast Iron K				Steel P
	Ball End, Straight Flute Endmills	31	Hardened H	Cast Iron K				Steel P
	Square End Mini Mills	32	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End Mini Mills	33	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Square End Taper Mills	34	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Ball End Taper Mills	35	Cermet	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P

Features Legend

	2 Flutes Square		Plain shank		2 Flutes Ball		3 Flutes Ball
	3 Flutes Square		Flat Shank		4 Flutes Ball		Ball Endmill
	4 Flutes Square		Double End Square				
	6 Flutes Square		Double End Ball				
	Corner Radius		Square EndMill				

Coatings Legend




Please contact us for our full line of metric products.

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized Volume)


Our superior tungsten carbide gives you the ability to be aggressive when you need to be. Growth inhibitors in our submicron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

SQUARE ENDMILLS



Standard, Stub and Long • 2, 3, & 4 Flutes Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven versatile performance
- MAP certified quality



Length Key (K)




Quick Ship Items




K	OD	LOC	SHK	OAL	Uncoated			PowerA		
	D1	L1	D2	L2	2 Flute	3 Flute	4 Flute	2 Flute	3 Flute	4 Flute
1/32	1/32	1/16	1/8	1-1/2	213-102	-	213-702	213-102-1	-	213-702-1
		3/32	1/8	1-1/2	209-202	210-202	211-202	209-202-1	210-202-1	211-202-1
3/64	3/64	3/32	1/8	1-1/2	213-104	-	213-704	213-104-1	-	213-704-1
		1/8	1/8	1-1/2	209-204	210-204	211-204	209-204-1	210-204-1	211-204-1
1/16	1/16	1/8	1/8	1-1/2	213-106	-	213-706	213-106-1	-	213-706-1
		1/4	1/8	1-1/2	209-206	210-206	211-206	209-206-1	210-206-1	211-206-1
5/64	5/64	1/4	1/8	1-1/2	209-208	210-208	211-208	209-208-1	210-208-1	211-208-1
3/32	3/32	3/16	1/8	1-1/2	213-108	-	213-708	213-108-1	-	213-708-1
		3/8	1/8	1-1/2	209-210	210-210	211-210	209-210-1	210-210-1	211-210-1
7/64	7/64	3/8	1/8	1-1/2	209-212	210-212	211-212	209-212-1	210-212-1	211-212-1
		1/4	1/8	1-1/2	213-112	-	213-712	213-112-1	-	213-712-1
1/8	1/8	1/2	1/8	1-1/2	209-214	210-214	211-214	209-214-1	210-214-1	211-214-1
		5/8	1/8	2	204-202	-	206-202	204-202-1	-	206-202-1
		3/4	1/8	2	204-204	-	206-204	204-204-1	-	206-204-1
		1	1/8	3	204-206	-	206-206	204-206-1	-	206-206-1
9/64	9/64	3/16	2	209-216	210-216	211-216	209-216-1	210-216-1	211-216-1	
5/32	5/32	5/16	3/16	2	213-110	-	213-710	213-110-1	-	213-710-1
		9/16	3/16	2	209-218	210-218	211-218	209-218-1	210-218-1	211-218-1
11/64	11/64	3/16	2	209-220	210-220	211-220	209-220-1	210-220-1	211-220-1	
3/16	3/16	3/8	3/16	2	213-114	-	213-714	213-114-1	-	213-714-1
		5/8	3/16	2	209-222	210-222	211-222	209-222-1	210-222-1	211-222-1
		3/4	3/16	2-1/2	204-208	-	206-208	204-208-1	-	206-208-1
		1-1/8	3/16	3	204-210	-	206-210	204-210-1	-	206-210-1
13/64	13/64	1/4	4	204-212	-	206-212	204-212-1	-	206-212-1	
13/64	13/64	5/8	1/4	2-1/2	209-224	210-224	211-224	209-224-1	210-224-1	211-224-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

SQUARE ENDMILLS



Standard, Stub and Long • 2, 3, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard
 Stub
 Long


Quick Ship Items

Cermet
Cast Iron
K
Titanium
S
Non-Ferrous
N
Stainless
M
Steel
P


K	OD	LOC	SHK	OAL	Uncoated			PowerA		
	D1	L1	D2	L2	2 Flute	3 Flute	4 Flute	2 Flute	3 Flute	4 Flute
	7/32	7/16	1/4	2	213-116	-	213-716	213-116-1	-	213-716-1
		5/8	1/4	2-1/2	209-226	210-226	211-226	209-226-1	210-226-1	211-226-1
	15/64	3/4	1/4	2-1/2	209-228	210-228	211-228	209-228-1	210-228-1	211-228-1
		1/2	1/4	2	213-118	-	213-718	213-118-1	-	213-718-1
	1/4	3/4	1/4	2-1/2	209-230	210-230	211-230	209-230-1	210-230-1	211-230-1
		1-1/8	1/4	3	204-214	-	206-214	204-214-1	-	206-214-1
		1	1/4	4	204-216	-	206-216	204-216-1	-	206-216-1
		1-1/2	1/4	4	204-218	-	206-218	204-218-1	-	206-218-1
		1-1/2	1/4	6	204-220	-	206-220	204-220-1	-	206-220-1
	17/64	7/8	5/16	2-1/2	209-232	210-232	211-232	209-232-1	210-232-1	211-232-1
	9/32	7/8	5/16	2-1/2	209-234	210-234	211-234	209-234-1	210-234-1	211-234-1
	19/64	7/8	5/16	2-1/2	209-236	210-236	211-236	209-236-1	210-236-1	211-236-1
	5/16	1/2	5/16	2	213-120	-	213-720	213-120-1	-	213-720-1
		7/8	5/16	2-1/2	209-238	210-238	211-238	209-238-1	210-238-1	211-238-1
		1-1/8	5/16	3	204-222	-	206-222	204-222-1	-	206-222-1
		1	5/16	4	204-224	-	206-224	204-224-1	-	206-224-1
		1-5/8	5/16	4	204-226	-	206-226	204-226-1	-	206-226-1
		1-1/2	5/16	6	204-228	-	206-228	204-228-1	-	206-228-1
	21/64	7/8	3/8	2-1/2	209-240	210-240	211-240	209-240-1	210-240-1	211-240-1
	11/32	7/8	3/8	2-1/2	209-242	210-242	211-242	209-242-1	210-242-1	211-242-1
	23/64	7/8	3/8	2-1/2	209-244	210-244	211-244	209-244-1	210-244-1	211-244-1
	3/8	5/8	3/8	2	213-122	-	213-722	213-122-1	-	213-722-1
		7/8	3/8	2-1/2	209-246	210-246	211-246	209-246-1	210-246-1	211-246-1
		1-1/8	3/8	3	204-230	-	206-230	204-230-1	-	206-230-1
		1-3/4	3/8	4	204-232	-	206-232	204-232-1	-	206-232-1
		2	3/8	4	204-234	-	206-234	204-234-1	-	206-234-1
		1-1/2	3/8	6	204-236	-	206-236	204-236-1	-	206-236-1
		3	3/8	6	204-238	-	206-238	204-238-1	-	206-238-1
	25/64	7/8	7/16	2-1/2	209-248	210-248	211-248	209-248-1	210-248-1	211-248-1
	13/32	7/8	7/16	2-1/2	209-250	210-250	211-250	209-250-1	210-250-1	211-250-1
	27/64	7/8	7/16	2-1/2	209-252	210-252	211-252	209-252-1	210-252-1	211-252-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

SQUARE ENDMILLS



Standard, Stub and Long • 2, 3, & 4 Flutes Coated and Uncoated



Length Key (K)




Quick Ship Items

K	OD	LOC	SHK	OAL	Uncoated			PowerA			
	D1	L1	D2	L2	2 Flute	3 Flute	4 Flute	2 Flute	3 Flute	4 Flute	
7/16	7/16	5/8	7/16	2-1/2	213-124	-	213-724	213-124-1	-	213-724-1	
		1	7/16	2-1/2	209-254	210-254	211-254	209-254-1	210-254-1	211-254-1	
		1	7/16	4	204-240	-	206-240	204-240-1	-	206-240-1	
		2	7/16	4	204-242	-	206-242	204-242-1	-	206-242-1	
		1-1/2	7/16	6	204-244	-	206-244	204-244-1	-	206-244-1	
		3	7/16	6	204-246	-	206-246	204-246-1	-	206-246-1	
29/64	29/64	1	1/2	3	209-256	210-256	211-256	209-256-1	210-256-1	211-256-1	
		15/32	1	1/2	3	209-258	210-258	211-258	209-258-1	210-258-1	211-258-1
		31/64	1	1/2	3	209-260	210-260	211-260	209-260-1	210-260-1	211-260-1
1/2	1/2	5/8	1/2	2-1/2	213-126	-	213-726	213-126-1	-	213-726-1	
		1	1/2	3	209-262	210-262	211-262	209-262-1	210-262-1	211-262-1	
		1	1/2	4	204-248	-	206-248	204-248-1	-	206-248-1	
		1-1/2	1/2	6	204-250	-	206-250	204-250-1	-	206-250-1	
		2	1/2	4	204-252	-	206-252	204-252-1	-	206-252-1	
		3	1/2	6	204-254	-	206-254	204-254-1	-	206-254-1	
9/16	9/16	1-1/4	9/16	3-1/2	209-264	210-264	211-264	209-264-1	210-264-1	211-264-1	
		5/8	3/4	5/8	3	213-128	-	213-728	213-128-1	-	213-728-1
			1-1/4	5/8	3-1/2	209-266	210-266	211-266	209-266-1	210-266-1	211-266-1
			2-1/4	5/8	5	204-256	-	206-256	204-256-1	-	206-256-1
11/16	11/16	3	5/8	6	204-258	-	206-258	204-258-1	-	206-258-1	
		3/4	1-1/2	3/4	4	209-268	210-268	211-268	209-268-1	210-268-1	211-268-1
			1	3/4	3	213-130	-	213-730	213-130-1	-	213-730-1
			1-1/2	3/4	4	209-270	210-270	211-270	209-270-1	210-270-1	211-270-1
7/8	7/8	2-1/4	3/4	5	204-260	-	206-260	204-260-1	-	206-260-1	
		3	3/4	6	204-262	-	206-262	204-262-1	-	206-262-1	
		1	1-1/2	7/8	4	209-272	210-272	211-272	209-272-1	210-272-1	211-272-1
			1	1	3	213-132	-	213-732	213-132-1	-	213-732-1
1-1/2	1		4	209-274	210-274	211-274	209-274-1	210-274-1	211-274-1		
1-1/4	1-1/4	2	1	6	204-264	-	206-264	204-264-1	-	206-264-1	
		3	1	6	204-266	-	206-266	204-266-1	-	206-266-1	
		4	1	6	204-268	-	206-268	204-268-1	-	206-268-1	
		2	1-1/4	4-1/2	209-276	210-276	211-276	209-276-1	210-276-1	211-276-1	

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL ENDMILLS



Standard, Stub and Long • 2, 3, & 4 Flutes Coated and Uncoated

- Genuine **A-Gr-SiV** submicron grain carbide
- Proven versatile performance
- MAP certified quality




Stub, Series 213



Standard, Series 209, 210, 211



Long, Series 204, 206



Length Key (K)

Standard Stub Long




Quick Ship Items


K	OD	LOC	SHK	OAL	Uncoated			PowerA		
	D1	L1	D2	L2	2 Flute	3 Flute	4 Flute	2 Flute	3 Flute	4 Flute
Stub	1/32	1/16	1/8	1-1/2	213-002	-	213-602	213-002-1	-	213-602-1
		3/32	1/8	1-1/2	209-002	210-002	211-002	209-002-1	210-002-1	211-002-1
Stub	3/64	3/32	1/8	1-1/2	213-004	-	213-604	213-004-1	-	213-604-1
		1/8	1/8	1-1/2	209-004	210-004	211-004	209-004-1	210-004-1	211-004-1
Stub	1/16	1/8	1/8	1-1/2	213-006	-	213-606	213-006-1	-	213-606-1
		1/4	1/8	1-1/2	209-006	210-006	211-006	209-006-1	210-006-1	211-006-1
Stub	5/64	1/4	1/8	1-1/2	209-008	210-008	211-008	209-008-1	210-008-1	211-008-1
		3/16	1/8	1-1/2	213-008	-	213-608	213-008-1	-	213-608-1
Stub	3/32	3/8	1/8	1-1/2	209-010	210-010	211-010	209-010-1	210-010-1	211-010-1
		7/64	1/8	1-1/2	209-012	210-012	211-012	209-012-1	210-012-1	211-012-1
Stub	1/8	1/4	1/8	1-1/2	213-012	-	213-612	213-012-1	-	213-612-1
		1/2	1/8	1-1/2	209-014	210-014	211-014	209-014-1	210-014-1	211-014-1
		5/8	1/8	2	204-002	-	206-002	204-002-1	-	206-002-1
		3/4	1/8	2	204-004	-	206-004	204-004-1	-	206-004-1
Stub	9/64	1	1/8	3	204-006	-	206-006	204-006-1	-	206-006-1
		9/16	3/16	2	209-016	210-016	211-016	209-016-1	210-016-1	211-016-1
Stub	5/32	5/16	3/16	2	213-010	-	213-610	213-010-1	-	213-610-1
		9/16	3/16	2	209-018	210-018	211-018	209-018-1	210-018-1	211-018-1
Stub	11/64	9/16	3/16	2	209-020	210-020	211-020	209-020-1	210-020-1	211-020-1
		3/8	3/16	2	213-014	-	213-614	213-014-1	-	213-614-1
Stub	3/16	5/8	3/16	2	209-022	210-022	211-022	209-022-1	210-022-1	211-022-1
		3/4	3/16	2-1/2	204-008	-	206-008	204-008-1	-	206-008-1
		1-1/8	3/16	3	204-010	-	206-010	204-010-1	-	206-010-1
		1	3/16	4	204-012	-	206-012	204-012-1	-	206-012-1
Stub	13/64	5/8	1/4	2-1/2	209-024	210-024	211-024	209-024-1	210-024-1	211-024-1
		7/16	1/4	2	213-016	-	213-616	213-016-1	-	213-616-1
Stub	7/32	5/8	1/4	2-1/2	209-026	210-026	211-026	209-026-1	210-026-1	211-026-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL ENDMILLS



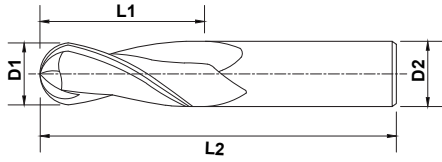Standard, Stub and Long • 2, 3, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard
 Stub
 Long


Quick Ship Items




K	OD	LOC	SHK	OAL	Uncoated			PowerA		
	D1	L1	D2	L2	2 Flute	3 Flute	4 Flute	2 Flute	3 Flute	4 Flute
15/64	3/4	1/4	2-1/2	209-028	210-028	211-028	209-028-1	210-028-1	211-028-1	
		1/2	2	213-018	-	213-618	213-018-1	-	213-618-1	
		3/4	2-1/2	209-030	210-030	211-030	209-030-1	210-030-1	211-030-1	
		1-1/8	3	204-014	-	206-014	204-014-1	-	206-014-1	
		1	4	204-016	-	206-016	204-016-1	-	206-016-1	
		1-1/2	4	204-018	-	206-018	204-018-1	-	206-018-1	
		1-1/2	6	204-020	-	206-020	204-020-1	-	206-020-1	
17/64	7/8	5/16	2-1/2	209-032	210-032	211-032	209-032-1	210-032-1	211-032-1	
		9/32	2-1/2	209-034	210-034	211-034	209-034-1	210-034-1	211-034-1	
19/64	7/8	5/16	2-1/2	209-036	210-036	211-036	209-036-1	210-036-1	211-036-1	
		1/2	2	213-020	-	213-620	213-020-1	-	213-620-1	
		7/8	2-1/2	209-038	210-038	211-038	209-038-1	210-038-1	211-038-1	
		1-1/8	3	204-022	-	206-022	204-022-1	-	206-022-1	
		1	4	204-024	-	206-024	204-024-1	-	206-024-1	
		1-5/8	4	204-026	-	206-026	204-026-1	-	206-026-1	
		1-1/2	6	204-028	-	206-028	204-028-1	-	206-028-1	
21/64	7/8	3/8	2-1/2	209-040	210-040	211-040	209-040-1	210-040-1	211-040-1	
		11/32	2-1/2	209-042	210-042	211-042	209-042-1	210-042-1	211-042-1	
		23/64	2-1/2	209-044	210-044	211-044	209-044-1	210-044-1	211-044-1	
3/8	7/8	3/8	2	213-022	-	213-622	213-022-1	-	213-622-1	
		7/8	2-1/2	209-046	210-046	211-046	209-046-1	210-046-1	211-046-1	
		1-1/8	3	204-030	-	206-030	204-030-1	-	206-030-1	
		1-3/4	4	204-032	-	206-032	204-032-1	-	206-032-1	
		2	4	204-034	-	206-034	204-034-1	-	206-034-1	
		1-1/2	6	204-036	-	206-036	204-036-1	-	206-036-1	
		3	6	204-038	-	206-038	204-038-1	-	206-038-1	
25/64	7/8	7/16	2-1/2	209-048	210-048	211-048	209-048-1	210-048-1	211-048-1	
		13/32	2-1/2	209-050	210-050	211-050	209-050-1	210-050-1	211-050-1	
		27/64	2-1/2	209-052	210-052	211-052	209-052-1	210-052-1	211-052-1	
7/16	7/8	7/16	2-1/2	213-024	-	213-624	213-024-1	-	213-624-1	
		1	2-1/2	209-054	210-054	211-054	209-054-1	210-054-1	211-054-1	
		1	4	204-040	-	206-040	204-040-1	-	206-040-1	

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL ENDMILLS



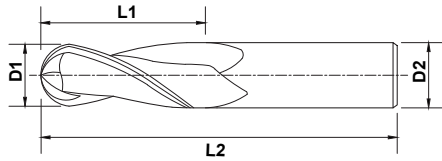Standard, Stub and Long • 2, 3, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard Stub Long


Quick Ship Items



K	OD	LOC	SHK	OAL	Uncoated			PowerA			
	D1	L1	D2	L2	2 Flute	3 Flute	4 Flute	2 Flute	3 Flute	4 Flute	
7/16		2	7/16	4	204-042	-	206-042	204-042-1	-	206-042-1	
		1-1/2	7/16	6	204-044	-	206-044	204-044-1	-	206-044-1	
		3	7/16	6	204-046	-	206-046	204-046-1	-	206-046-1	
29/64		1	1/2	3	209-056	210-056	211-056	209-056-1	210-056-1	211-056-1	
		15/32	1	1/2	3	209-058	210-058	211-058	209-058-1	210-058-1	211-058-1
		31/64	1	1/2	3	209-060	210-060	211-060	209-060-1	210-060-1	211-060-1
1/2		5/8	1/2	2-1/2	213-026	-	213-626	213-026-1	-	213-626-1	
		1	1/2	3	209-062	210-062	211-062	209-062-1	210-062-1	211-062-1	
		1	1/2	4	204-048	-	206-048	204-048-1	-	206-048-1	
		1-1/2	1/2	6	204-050	-	206-050	204-050-1	-	206-050-1	
		2	1/2	4	204-052	-	206-052	204-052-1	-	206-052-1	
		3	1/2	6	204-054	-	206-054	204-054-1	-	206-054-1	
9/16		1-1/4	9/16	3-1/2	209-064	210-064	211-064	209-064-1	210-064-1	211-064-1	
5/8		3/4	5/8	3	213-028	-	213-628	213-028-1	-	213-628-1	
		1-1/4	5/8	3-1/2	209-066	210-066	211-066	209-066-1	210-066-1	211-066-1	
		2-1/4	5/8	5	204-056	-	206-056	204-056-1	-	206-056-1	
		3	5/8	6	204-058	-	206-058	204-058-1	-	206-058-1	
11/16		1-1/2	3/4	4	209-068	210-068	211-068	209-068-1	210-068-1	211-068-1	
3/4		1	3/4	3	213-030	-	213-630	213-030-1	-	213-630-1	
		1-1/2	3/4	4	209-070	210-070	211-070	209-070-1	210-070-1	211-070-1	
		2-1/4	3/4	5	204-060	-	206-060	204-060-1	-	206-060-1	
		3	3/4	6	204-062	-	206-062	204-062-1	-	206-062-1	
7/8		1-1/2	7/8	4	209-072	210-072	211-072	209-072-1	210-072-1	211-072-1	
1		1	1	3	213-032	-	213-632	213-032-1	-	213-632-1	
		1-1/2	1	4	209-074	210-074	211-074	209-074-1	210-074-1	211-074-1	
		2	1	6	204-064	-	206-064	204-064-1	-	206-064-1	
		3	1	6	204-066	-	206-066	204-066-1	-	206-066-1	
		4	1	6	204-068	-	206-068	204-068-1	-	206-068-1	
1-1/4		2	1-1/4	4-1/2	209-076	210-076	211-076	209-076-1	210-076-1	211-076-1	


Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



2, & 4 Flutes Coated and Uncoated

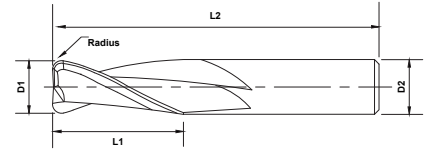- Genuine A-Gr-SiV submicron grain carbide
- Corner radius for extra strength and precision
- MAP certified quality



Standard, Series 209, 211



Long, Series 204, 206

Length Key (K)

Standard Stub Long



Quick Ship Items


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA	
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute
1/8	1/8	1/2	1/8	1-1/2	.015	209-401	211-401	209-401-1	211-401-1
		1/2	1/8	1-1/2	.020	209-402	211-402	209-402-1	211-402-1
		1/2	1/8	1-1/2	.030	209-403	211-403	209-403-1	211-403-1
		1/2	1/8	1-1/2	.045	209-404	211-404	209-404-1	211-404-1
		1/2	1/8	1-1/2	.060	209-405	211-405	209-405-1	211-405-1
	3/16	1	1/8	3	.010	204-400	206-400	204-400-1	206-400-1
		1	1/8	3	.015	204-401	206-401	204-401-1	206-401-1
		1	1/8	3	.020	204-402	206-402	204-402-1	206-402-1
		1	1/8	3	.030	204-403	206-403	204-403-1	206-403-1
		1	1/8	3	.045	204-404	206-404	204-404-1	206-404-1
3/16	5/8	3/16	2	.015	209-411	211-411	209-411-1	211-411-1	
		3/16	2	.020	209-412	211-412	209-412-1	211-412-1	
		3/16	2	.030	209-413	211-413	209-413-1	211-413-1	
		3/16	2	.045	209-414	211-414	209-414-1	211-414-1	
		3/16	2	.060	209-415	211-415	209-415-1	211-415-1	
	1	3/16	3	.010	204-410	206-410	204-410-1	206-410-1	
		3/16	3	.015	204-411	206-411	204-411-1	206-411-1	
		3/16	3	.020	204-412	206-412	204-412-1	206-412-1	
		3/16	3	.030	204-413	206-413	204-413-1	206-413-1	
		3/16	3	.045	204-414	206-414	204-414-1	206-414-1	
		3/16	3	.060	204-415	206-415	204-415-1	206-415-1	
		4	.010	204-420	206-420	204-420-1	206-420-1		
		4	.015	204-421	206-421	204-421-1	206-421-1		
		4	.020	204-422	206-422	204-422-1	206-422-1		
		4	.030	204-423	206-423	204-423-1	206-423-1		
		4	.045	204-424	206-424	204-424-1	206-424-1		
		4	.060	204-425	206-425	204-425-1	206-425-1		

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



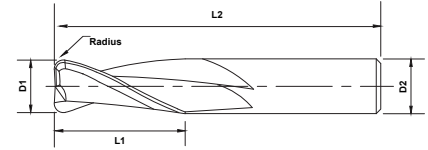2, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard
 Stub
 Long

Quick Ship Items

Cermet
K
S
N
M
P


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA	
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute
1/4		3/4	1/4	2-1/2	.015	209-421	211-421	209-421-1	211-421-1
		3/4	1/4	2-1/2	.020	209-422	211-422	209-422-1	211-422-1
		3/4	1/4	2-1/2	.030	209-423	211-423	209-423-1	211-423-1
		3/4	1/4	2-1/2	.045	209-424	211-424	209-424-1	211-424-1
		3/4	1/4	2-1/2	.060	209-425	211-425	209-425-1	211-425-1
		1-1/8	1/4	3	.010	204-430	206-430	204-430-1	206-430-1
		1-1/8	1/4	3	.015	204-431	206-431	204-431-1	206-431-1
		1-1/8	1/4	3	.020	204-432	206-432	204-432-1	206-432-1
		1-1/8	1/4	3	.030	204-433	206-433	204-433-1	206-433-1
		1-1/8	1/4	3	.045	204-434	206-434	204-434-1	206-434-1
		1-1/8	1/4	3	.060	204-435	206-435	204-435-1	206-435-1
		1	1/4	4	.010	204-440	206-440	204-440-1	206-440-1
		1	1/4	4	.015	204-441	206-441	204-441-1	206-441-1
		1	1/4	4	.020	204-442	206-442	204-442-1	206-442-1
		1	1/4	4	.030	204-443	206-443	204-443-1	206-443-1
		1	1/4	4	.045	204-444	206-444	204-444-1	206-444-1
		1	1/4	4	.060	204-445	206-445	204-445-1	206-445-1
		1-1/2	1/4	4	.010	204-450	206-450	204-450-1	206-450-1
		1-1/2	1/4	4	.015	204-451	206-451	204-451-1	206-451-1
		1-1/2	1/4	4	.020	204-452	206-452	204-452-1	206-452-1
1-1/2	1/4	4	.030	204-453	206-453	204-453-1	206-453-1		
1-1/2	1/4	4	.045	204-454	206-454	204-454-1	206-454-1		
1-1/2	1/4	4	.060	204-455	206-455	204-455-1	206-455-1		
1-1/2	1/4	6	.010	204-460	206-460	204-460-1	206-460-1		
1-1/2	1/4	6	.015	204-461	206-461	204-461-1	206-461-1		
1-1/2	1/4	6	.020	204-462	206-462	204-462-1	206-462-1		
1-1/2	1/4	6	.030	204-463	206-463	204-463-1	206-463-1		
1-1/2	1/4	6	.045	204-464	206-464	204-464-1	206-464-1		
1-1/2	1/4	6	.060	204-465	206-465	204-465-1	206-465-1		
5/16		13/16	5/16	2-1/2	.015	209-431	211-431	209-431-1	211-431-1
		13/16	5/16	2-1/2	.020	209-432	211-432	209-432-1	211-432-1
		13/16	5/16	2-1/2	.030	209-433	211-433	209-433-1	211-433-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



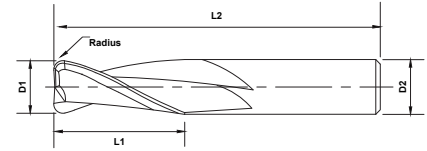2, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard Stub Long

Quick Ship Items




K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA			
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute		
5/16	5/16	13/16	5/16	2-1/2	.045	209-434	211-434	209-434-1	211-434-1		
		13/16	5/16	2-1/2	.060	209-435	211-435	209-435-1	211-435-1		
		1-1/8	5/16	3	.010	204-470	206-470	204-470-1	206-470-1		
		1-1/8	5/16	3	.015	204-471	206-471	204-471-1	206-471-1		
		1-1/8	5/16	3	.020	204-472	206-472	204-472-1	206-472-1		
		1-1/8	5/16	3	.030	204-473	206-473	204-473-1	206-473-1		
		1-1/8	5/16	3	.045	204-474	206-474	204-474-1	206-474-1		
		1-1/8	5/16	3	.060	204-475	206-475	204-475-1	206-475-1		
		1-1/8	5/16	3	.090	204-476	206-476	204-476-1	206-476-1		
		1-1/8	5/16	3	.125	204-477	206-477	204-477-1	206-477-1		
		1-1/2	5/16	6	.010	204-540	206-540	204-540-1	206-540-1		
		1-1/2	5/16	6	.015	204-541	206-541	204-541-1	206-541-1		
		1-1/2	5/16	6	.020	204-542	206-542	204-542-1	206-542-1		
		1-1/2	5/16	6	.030	204-543	206-543	204-543-1	206-543-1		
		1-1/2	5/16	6	.045	204-544	206-544	204-544-1	206-544-1		
		1-1/2	5/16	6	.060	204-545	206-545	204-545-1	206-545-1		
		1-1/2	5/16	6	.090	204-546	206-546	204-546-1	206-546-1		
		1-1/2	5/16	6	.125	204-547	206-547	204-547-1	206-547-1		
		1-5/8	5/16	4	.015	204-481	206-481	204-481-1	206-481-1		
		1-5/8	5/16	4	.020	204-482	206-482	204-482-1	206-482-1		
		1-5/8	5/16	4	.030	204-483	206-483	204-483-1	206-483-1		
		1-5/8	5/16	4	.045	204-484	206-484	204-484-1	206-484-1		
		1-5/8	5/16	4	.060	204-485	206-485	204-485-1	206-485-1		
		1-5/8	5/16	4	.090	204-486	206-486	204-486-1	206-486-1		
		1-5/8	5/16	4	.125	204-487	206-487	204-487-1	206-487-1		
		3/8	3/8	1	3/8	2-1/2	.015	209-441	211-441	209-441-1	211-441-1
				1	3/8	2-1/2	.020	209-442	211-442	209-442-1	211-442-1
				1	3/8	2-1/2	.030	209-443	211-443	209-443-1	211-443-1
1	3/8			2-1/2	.045	209-444	211-444	209-444-1	211-444-1		
1	3/8			2-1/2	.060	209-445	211-445	209-445-1	211-445-1		

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



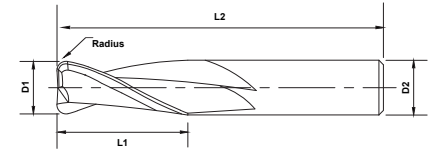2, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard
 Stub
 Long


Quick Ship Items

Cermet
K
S
N
M
P


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA	
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute
3/8	3/8	1-1/8	3/8	3	.010	204-490	206-490	204-490-1	206-490-1
		1-1/8	3/8	3	.015	204-491	206-491	204-491-1	206-491-1
		1-1/8	3/8	3	.020	204-492	206-492	204-492-1	206-492-1
		1-1/8	3/8	3	.030	204-493	206-493	204-493-1	206-493-1
		1-1/8	3/8	3	.045	204-494	206-494	204-494-1	206-494-1
		1-1/8	3/8	3	.060	204-495	206-495	204-495-1	206-495-1
		1-1/8	3/8	3	.090	204-496	206-496	204-496-1	206-496-1
		1-1/8	3/8	3	.125	204-497	206-497	204-497-1	206-497-1
		1-3/4	3/8	4	.010	204-500	206-500	204-500-1	206-500-1
		1-3/4	3/8	4	.015	204-501	206-501	204-501-1	206-501-1
		1-3/4	3/8	4	.020	204-502	206-502	204-502-1	206-502-1
		1-3/4	3/8	4	.030	204-503	206-503	204-503-1	206-503-1
		1-3/4	3/8	4	.045	204-504	206-504	204-504-1	206-504-1
		1-3/4	3/8	4	.060	204-505	206-505	204-505-1	206-505-1
		1-3/4	3/8	4	.090	204-506	206-506	204-506-1	206-506-1
		1-3/4	3/8	4	.125	204-507	206-507	204-507-1	206-507-1
		2	3/8	4	.010	204-510	206-510	204-510-1	206-510-1
		2	3/8	4	.015	204-511	206-511	204-511-1	206-511-1
		2	3/8	4	.020	204-512	206-512	204-512-1	206-512-1
		2	3/8	4	.030	204-513	206-513	204-513-1	206-513-1
		2	3/8	4	.045	204-514	206-514	204-514-1	206-514-1
		2	3/8	4	.060	204-515	206-515	204-515-1	206-515-1
		2	3/8	4	.090	204-516	206-516	204-516-1	206-516-1
		2	3/8	4	.125	204-517	206-517	204-517-1	206-517-1
		1-1/2	3/8	6	.010	204-520	206-520	204-520-1	206-520-1
		1-1/2	3/8	6	.015	204-521	206-521	204-521-1	206-521-1
		1-1/2	3/8	6	.020	204-522	206-522	204-522-1	206-522-1
		1-1/2	3/8	6	.030	204-523	206-523	204-523-1	206-523-1
		1-1/2	3/8	6	.045	204-524	206-524	204-524-1	206-524-1
		1-1/2	3/8	6	.060	204-525	206-525	204-525-1	206-525-1
		1-1/2	3/8	6	.090	204-526	206-526	204-526-1	206-526-1
		1-1/2	3/8	6	.125	204-527	206-527	204-527-1	206-527-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



2, & 4 Flutes Coated and Uncoated

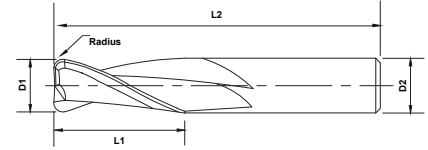

Length Key (K)

Standard Stub Long



Quick Ship Items


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA	
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute
3/8	3	3/8	6	.010	204-530	206-530	204-530-1	206-530-1	
		3/8	6	.015	204-531	206-531	204-531-1	206-531-1	
		3/8	6	.020	204-532	206-532	204-532-1	206-532-1	
		3/8	6	.030	204-533	206-533	204-533-1	206-533-1	
		3/8	6	.045	204-534	206-534	204-534-1	206-534-1	
		3/8	6	.060	204-535	206-535	204-535-1	206-535-1	
		3/8	6	.090	204-536	206-536	204-536-1	206-536-1	
	3/8	6	.125	204-537	206-537	204-537-1	206-537-1		
	7/16	2	7/16	4	.010	204-550	206-550	204-550-1	206-550-1
			7/16	4	.015	204-551	206-551	204-551-1	206-551-1
			7/16	4	.020	204-552	206-552	204-552-1	206-552-1
			7/16	4	.030	204-553	206-553	204-553-1	206-553-1
			7/16	4	.045	204-554	206-554	204-554-1	206-554-1
			7/16	4	.060	204-555	206-555	204-555-1	206-555-1
7/16			4	.090	204-556	206-556	204-556-1	206-556-1	
3		7/16	6	.010	204-560	206-560	204-560-1	206-560-1	
		7/16	6	.015	204-561	206-561	204-561-1	206-561-1	
		7/16	6	.020	204-562	206-562	204-562-1	206-562-1	
		7/16	6	.030	204-563	206-563	204-563-1	206-563-1	
		7/16	6	.045	204-564	206-564	204-564-1	206-564-1	
		7/16	6	.060	204-565	206-565	204-565-1	206-565-1	
1/2	1	1/2	3	.010	209-450	211-450	209-450-1	211-450-1	
		1/2	3	.015	209-451	211-451	209-451-1	211-451-1	
		1/2	3	.020	209-452	211-452	209-452-1	211-452-1	
		1/2	3	.030	209-453	211-453	209-453-1	211-453-1	
		1/2	3	.045	209-454	211-454	209-454-1	211-454-1	
		1/2	3	.060	209-455	211-455	209-455-1	211-455-1	
		1/2	3	.090	209-456	211-456	209-456-1	211-456-1	
	1/2	4	.010	204-570	206-570	204-570-1	206-570-1		
	1/2	4	.015	204-571	206-571	204-571-1	206-571-1		

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



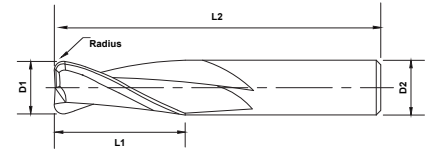2, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard
 Stub
 Long


Quick Ship Items

Cermet
Cast Iron
K
Titanium
S
Non-Ferrous
N
Stainless
M
Steel
P


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA		
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute	
1/2	1	1	1/2	4	.020	204-572	206-572	204-572-1	206-572-1	
		1	1/2	4	.030	204-573	206-573	204-573-1	206-573-1	
		1	1/2	4	.045	204-574	206-574	204-574-1	206-574-1	
		1	1/2	4	.060	204-575	206-575	204-575-1	206-575-1	
		1	1/2	4	.090	204-576	206-576	204-576-1	206-576-1	
		1	1/2	4	.125	204-577	206-577	204-577-1	206-577-1	
		1-1/2	1/2	6	.010	204-580	206-580	204-580-1	206-580-1	
		1-1/2	1/2	6	.015	204-581	206-581	204-581-1	206-581-1	
		1-1/2	1/2	6	.020	204-582	206-582	204-582-1	206-582-1	
		1-1/2	1/2	6	.030	204-583	206-583	204-583-1	206-583-1	
		1-1/2	1/2	6	.045	204-584	206-584	204-584-1	206-584-1	
		1-1/2	1/2	6	.060	204-585	206-585	204-585-1	206-585-1	
		1-1/2	1/2	6	.090	204-586	206-586	204-586-1	206-586-1	
		1-1/2	1/2	6	.125	204-587	206-587	204-587-1	206-587-1	
	2	1/2	2	1/2	4	.010	204-590	206-590	204-590-1	206-590-1
			2	1/2	4	.015	204-591	206-591	204-591-1	206-591-1
			2	1/2	4	.020	204-592	206-592	204-592-1	206-592-1
			2	1/2	4	.030	204-593	206-593	204-593-1	206-593-1
			2	1/2	4	.045	204-594	206-594	204-594-1	206-594-1
			2	1/2	4	.060	204-595	206-595	204-595-1	206-595-1
			2	1/2	4	.090	204-596	206-596	204-596-1	206-596-1
		3	3	1/2	6	.010	204-600	206-600	204-600-1	206-600-1
			3	1/2	6	.015	204-601	206-601	204-601-1	206-601-1
			3	1/2	6	.020	204-602	206-602	204-602-1	206-602-1
			3	1/2	6	.030	204-603	206-603	204-603-1	206-603-1
			3	1/2	6	.045	204-604	206-604	204-604-1	206-604-1
			3	1/2	6	.060	204-605	206-605	204-605-1	206-605-1
			3	1/2	6	.090	204-606	206-606	204-606-1	206-606-1
3	3	1/2	6	.125	204-607	206-607	204-607-1	206-607-1		
	5/8	1-1/4	5/8	3-1/2	.015	209-461	211-461	209-461-1	211-461-1	
		1-1/4	5/8	3-1/2	.020	209-462	211-462	209-462-1	211-462-1	
1-1/4		5/8	3-1/2	.030	209-463	211-463	209-463-1	211-463-1		

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



2, & 4 Flutes Coated and Uncoated

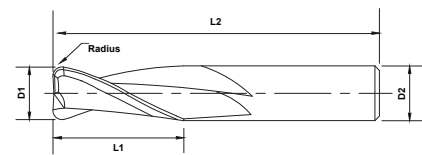

Length Key (K)

Standard Stub Long



Quick Ship Items


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA	
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute
5/8	5/8	1-1/4	5/8	3-1/2	.045	209-464	211-464	209-464-1	211-464-1
		1-1/4	5/8	3-1/2	.060	209-465	211-465	209-465-1	211-465-1
		1-1/4	5/8	3-1/2	.090	209-466	211-466	209-466-1	211-466-1
		2-1/4	5/8	5	.010	204-610	206-610	204-610-1	206-610-1
		2-1/4	5/8	5	.015	204-611	206-611	204-611-1	206-611-1
		2-1/4	5/8	5	.020	204-612	206-612	204-612-1	206-612-1
		2-1/4	5/8	5	.030	204-613	206-613	204-613-1	206-613-1
		2-1/4	5/8	5	.045	204-614	206-614	204-614-1	206-614-1
		2-1/4	5/8	5	.060	204-615	206-615	204-615-1	206-615-1
		2-1/4	5/8	5	.090	204-616	206-616	204-616-1	206-616-1
		2-1/4	5/8	5	.125	204-617	206-617	204-617-1	206-617-1
		3	5/8	6	.010	204-620	206-620	204-620-1	206-620-1
		3	5/8	6	.015	204-621	206-621	204-621-1	206-621-1
		3	5/8	6	.020	204-622	206-622	204-622-1	206-622-1
		3	5/8	6	.030	204-623	206-623	204-623-1	206-623-1
		3	5/8	6	.045	204-624	206-624	204-624-1	206-624-1
		3	5/8	6	.060	204-625	206-625	204-625-1	206-625-1
		3	5/8	6	.090	204-626	206-626	204-626-1	206-626-1
3	5/8	6	.125	204-627	206-627	204-627-1	206-627-1		
3/4	3/4	1-1/2	3/4	4	.015	209-471	211-471	209-471-1	211-471-1
		1-1/2	3/4	4	.020	209-472	211-472	209-472-1	211-472-1
		1-1/2	3/4	4	.030	209-473	211-473	209-473-1	211-473-1
		1-1/2	3/4	4	.045	209-474	211-474	209-474-1	211-474-1
		1-1/2	3/4	4	.060	209-475	211-475	209-475-1	211-475-1
		1-1/2	3/4	4	.090	209-476	211-476	209-476-1	211-476-1
		2-1/4	3/4	5	.015	204-631	206-631	204-631-1	206-631-1
		2-1/4	3/4	5	.020	204-632	206-632	204-632-1	206-632-1
		2-1/4	3/4	5	.030	204-633	206-633	204-633-1	206-633-1
		2-1/4	3/4	5	.045	204-634	206-634	204-634-1	206-634-1
		2-1/4	3/4	5	.060	204-635	206-635	204-635-1	206-635-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

CORNER RADIUS ENDMILLS



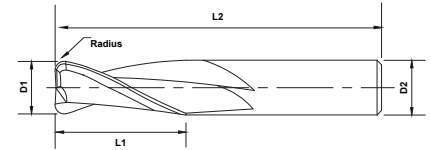2, & 4 Flutes Coated and Uncoated



Length Key (K)

Standard
 Stub
 Long


Quick Ship Items

Cermet
K
S
N
M
P

K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerA	
	D1	L1	D2	L2	R	2 Flute	4 Flute	2 Flute	4 Flute
3/4		2-1/4	3/4	5	.090	204-636	206-636	204-636-1	206-636-1
		2-1/4	3/4	5	.125	204-637	206-637	204-637-1	206-637-1
		3	3/4	6	.015	204-641	206-641	204-641-1	206-641-1
		3	3/4	6	.020	204-642	206-642	204-642-1	206-642-1
		3	3/4	6	.030	204-643	206-643	204-643-1	206-643-1
		3	3/4	6	.045	204-644	206-644	204-644-1	206-644-1
		3	3/4	6	.060	204-645	206-645	204-645-1	206-645-1
		3	3/4	6	.090	204-646	206-646	204-646-1	206-646-1
1		1-1/2	1	4	.015	209-481	211-481	209-481-1	211-481-1
		1-1/2	1	4	.020	209-482	211-482	209-482-1	211-482-1
		1-1/2	1	4	.030	209-483	211-483	209-483-1	211-483-1
		1-1/2	1	4	.045	209-484	211-484	209-484-1	211-484-1
		1-1/2	1	4	.060	209-485	211-485	209-485-1	211-485-1
		1-1/2	1	4	.090	209-486	211-486	209-486-1	211-486-1
		3	1	6	.015	204-651	206-651	204-651-1	206-651-1
		3	1	6	.020	204-652	206-652	204-652-1	206-652-1
		3	1	6	.030	204-653	206-653	204-653-1	206-653-1
		3	1	6	.045	204-654	206-654	204-654-1	206-654-1
		3	1	6	.060	204-655	206-655	204-655-1	206-655-1
		3	1	6	.090	204-656	206-656	204-656-1	206-656-1
		3	1	6	.125	204-657	206-657	204-657-1	206-657-1


Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

6 FLUTE SQUARE ENDMILLS



Standard Length - Coated and Uncoated

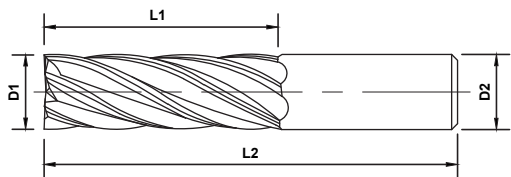- Genuine A-Gr-SiV submicron grain carbide
- Corner radius for extra strength and precision
- MAP certified quality



Series 212



Series 212, PowerA


Length Key (K)

Standard Stub Long




	OD	LOC	SHK	OAL	Uncoated	PowerA
K	D1	L1	D2	L2	6 Flute	6 Flute
Standard	3/16	5/8	3/16	2	212-222	212-222-1
	1/4	3/4	1/4	2-1/2	212-230	212-230-1
	5/16	7/8	5/16	2-1/2	212-238	212-238-1
	3/8	1	3/8	2-1/2	212-246	212-246-1
	7/16	1	7/16	2-1/2	212-254	212-254-1
	1/2	1	1/2	3	212-262	212-262-1
	5/8	1-1/4	5/8	3-1/2	212-266	212-266-1
	3/4	1-1/2	3/4	4	212-270	212-270-1
	7/8	1-1/2	7/8	4	212-272	212-272-1

SQUARE END - DOUBLE END



Standard, Stub and Long • 2 & 4 Flutes Coated and Uncoated

- Genuine *A-Gr-SiV* submicron grain carbide
- Proven versatile performance
- MAP certified quality



Standard, Series 201
Stub, Series 202



Standard, Series 201, PowerA
Stub, Series 202, PowerA

Length Key (K)


Standard Stub Long




K	OD	LOC	SHK	OAL	Uncoated		PowerA	
	D1	L1	D2	L2	2 Flute	4 Flute	2 Flute	4 Flute
1/32	1/32	1/16	1/8	1-1/2	202-102	202-302	202-102-1	202-302-1
		3/32	1/8	2	201-102	201-302	201-102-1	201-302-1
3/64	3/64	3/32	1/8	1-1/2	202-104	202-304	202-104-1	202-304-1
		1/8	1/8	2	201-104	201-304	201-104-1	201-304-1
1/16	1/16	1/8	1/8	1-1/2	202-106	202-306	202-106-1	202-306-1
		3/16	1/8	2	201-106	201-306	201-106-1	201-306-1
5/64	5/64	3/16	1/8	1-1/2	202-108	202-308	202-108-1	202-308-1
		3/16	1/8	1-1/2	202-110	202-310	202-110-1	202-310-1
3/32	3/32	1/4	1/8	2	201-108	201-308	201-108-1	201-308-1
		1/4	1/8	1-1/2	202-112	202-312	202-112-1	202-312-1
1/8	1/8	1/4	1/8	1-1/2	202-114	202-314	202-114-1	202-314-1
		3/8	1/8	2	201-110	201-310	201-110-1	201-310-1
5/32	5/32	5/16	3/16	2	202-116	202-316	202-116-1	202-316-1
		7/16	3/16	2-1/2	201-112	201-312	201-112-1	201-312-1
3/16	3/16	3/8	3/16	2	202-118	202-318	202-118-1	202-318-1
		1/2	3/16	2-1/2	201-114	201-314	201-114-1	201-314-1
7/32	7/32	1/2	1/4	2-1/2	202-120	202-320	202-120-1	202-320-1
		9/16	1/4	2-1/2	201-116	201-316	201-116-1	201-316-1
1/4	1/4	1/2	1/4	2-1/2	202-122	202-322	202-122-1	202-322-1
		5/8	1/4	2-1/2	201-118	201-318	201-118-1	201-318-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

SQUARE END - DOUBLE END



Standard, Stub and Long • 2 & 4 Flutes Coated and Uncoated



Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
5/16	5/16	1/2	5/16	2-1/2	202-124	202-324	202-124-1	202-324-1
		3/4	5/16	3-1/2	201-120	201-320	201-120-1	201-320-1
3/8	3/8	1/2	3/8	2-1/2	202-126	202-326	202-126-1	202-326-1
		3/4	3/8	3-1/2	201-122	201-322	201-122-1	201-322-1
7/16	7/16	1/2	7/16	2-1/2	202-128	202-328	202-128-1	202-328-1
		7/8	7/16	4	201-124	201-324	201-124-1	201-324-1
1/2	1/2	5/8	1/2	3	202-130	202-330	202-130-1	202-330-1
		1	1/2	4	201-126	201-326	201-126-1	201-326-1
9/16	9/16	1-1/4	9/16	6	201-128	201-328	201-128-1	201-328-1
		3/4	5/8	4	202-132	202-332	202-132-1	202-332-1
5/8	5/8	1-1/4	5/8	6	201-130	201-330	201-130-1	201-330-1
		1	3/4	4	202-134	202-334	202-134-1	202-334-1
3/4	3/4	1-1/2	3/4	6	201-132	201-332	201-132-1	201-332-1
		1-1/2	7/8	6	201-134	201-334	201-134-1	201-334-1
1	1	1-1/2	1	6	201-136	201-336	201-136-1	201-336-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL END - DOUBLE END





Standard, Stub and Long • 2 & 4 Flutes Coated and Uncoated

- Genuine *A-Gr-SiV* submicron grain carbide
- Proven versatile performance
- MAP certified quality



Stub, Series 202



Standard, Series 201



Standard, Series 201, PowerA

Length Key (K)


Standard Stub Long




K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
1/32	D1	1/16	1/8	1-1/2	202-002	202-202	202-002-1	202-202-1
		3/32	1/8	2	201-002	201-202	201-002-1	201-202-1
3/64	D1	3/32	1/8	1-1/2	202-004	202-204	202-004-1	202-204-1
		1/8	1/8	2	201-004	201-204	201-004-1	201-204-1
1/16	D1	1/8	1/8	1-1/2	202-006	202-206	202-006-1	202-206-1
		3/16	1/8	2	201-006	201-206	201-006-1	201-206-1
5/64	D1	3/16	1/8	1-1/2	202-008	202-208	202-008-1	202-208-1
		3/16	1/8	1-1/2	202-010	202-210	202-010-1	202-210-1
3/32	D1	1/4	1/8	2	201-008	201-208	201-008-1	201-208-1
		7/64	1/8	1-1/2	202-012	202-212	202-012-1	202-212-1
1/8	D1	1/4	1/8	1-1/2	202-014	202-214	202-014-1	202-214-1
		3/8	1/8	2	201-010	201-210	201-010-1	201-210-1
5/32	D1	5/16	3/16	2	202-016	202-216	202-016-1	202-216-1
		7/16	3/16	2-1/2	201-012	201-212	201-012-1	201-212-1
3/16	D1	3/8	3/16	2	202-018	202-218	202-018-1	202-218-1
		1/2	3/16	2-1/2	201-014	201-214	201-014-1	201-214-1
7/32	D1	1/2	1/4	2-1/2	202-020	202-220	202-020-1	202-220-1
		9/16	1/4	2-1/2	201-016	201-216	201-016-1	201-216-1
1/4	D1	1/2	1/4	2-1/2	202-022	202-222	202-022-1	202-222-1
		5/8	1/4	2-1/2	201-018	201-218	201-018-1	201-218-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL END - DOUBLE END



Standard, Stub and Long • 2 & 4 Flutes Coated and Uncoated



Length Key (K)


Standard
 Stub
 Long



K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	5/16	1/2	5/16	2-1/2	202-024	202-224	202-024-1	202-224-1
		3/4	5/16	3-1/2	201-020	201-220	201-020-1	201-220-1
	3/8	1/2	3/8	2-1/2	202-026	202-226	202-026-1	202-226-1
		3/4	3/8	3-1/2	201-022	201-222	201-022-1	201-222-1
	7/16	1/2	7/16	2-1/2	202-028	202-228	202-028-1	202-228-1
		7/8	7/16	4	201-024	201-224	201-024-1	201-224-1
	1/2	5/8	1/2	3	202-030	202-230	202-030-1	202-230-1
		1	1/2	4	201-026	201-226	201-026-1	201-226-1
	9/16	1-1/4	9/16	6	201-028	201-228	201-028-1	201-228-1
		3/4	5/8	4	202-032	202-232	202-032-1	202-232-1
	5/8	1-1/4	5/8	6	201-030	201-230	201-030-1	201-230-1
		1	3/4	4	202-034	202-234	202-034-1	202-234-1
	3/4	1-1/2	3/4	6	201-032	201-232	201-032-1	201-232-1
		1-1/2	7/8	6	201-034	201-234	201-034-1	201-234-1
	7/8	1-1/2	7/8	6	201-034	201-234	201-034-1	201-234-1
		1-1/2	1	6	201-036	201-236	201-036-1	201-236-1
	1	1-1/2	1	6	201-036	201-236	201-036-1	201-236-1


Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

SQUARE DOUBLE END WITH FLAT




Common Shank with Flat • 2 and 4 Flutes • Coated and Uncoated

- Genuine *A-Gr-SiV* submicron grain carbide
- Proven versatile performance
- MAP certified quality



Series 200



Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	1/8	3/8	3/8	3	200-102W	200-302W	200-102W-1	200-302W-1
	5/32	7/16	3/8	3-1/2	200-114W	200-314W	200-114W-1	200-314W-1
	3/16	1/2	3/8	3	200-104W	200-304W	200-104W-1	200-304W-1
	7/32	9/16	3/8	3	200-106W	200-306W	200-106W-1	200-306W-1
	1/4	5/8	3/8	3	200-108W	200-308W	200-108W-1	200-308W-1
	5/16	3/4	3/8	3-1/2	200-110W	200-310W	200-110W-1	200-310W-1
	3/8	3/4	3/8	3-1/2	200-112W	200-312W	200-112W-1	200-312W-1


'W' appended to a part number indicates this tool is manufactured with a flat on the shank.

BALL DOUBLE END WITH FLAT




Common Shank with Flat • 2 and 4 Flutes • Coated and Uncoated

- Genuine *A-Gr-SiV* submicron grain carbide
- Proven versatile performance
- MAP certified quality



Series 200



Length Key (K)


Standard Stub Long




K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	1/8	3/8	3/8	3	200-002W	200-202W	200-002W-1	200-202W-1
	5/32	7/16	3/8	3-1/2	200-014W	200-214W	200-014W-1	200-214W-1
	3/16	1/2	3/8	3	200-004W	200-204W	200-004W-1	200-204W-1
	7/32	9/16	3/8	3	200-006W	200-206W	200-006W-1	200-206W-1
	1/4	5/8	3/8	3	200-008W	200-208W	200-008W-1	200-208W-1
	5/16	3/4	3/8	3-1/2	200-010W	200-210W	200-010W-1	200-210W-1
	3/8	3/4	3/8	3-1/2	200-012W	200-212W	200-012W-1	200-212W-1

'W' appended to a part number indicates this tool is manufactured with a flat on the shank.

90° DRILL MILLS



2 and 4 Flutes • Coated and Uncoated

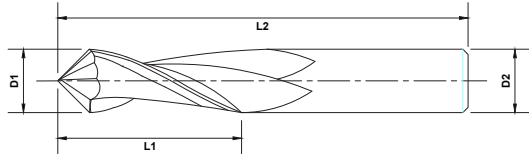

- Genuine A-Gr-SiVsubmicron grain carbide
- Chamfering, countersinking, spotting, and profile milling
- MAP certified quality



Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	1/8	1/2	1/8	1-1/2	214-002	214-302	214-002-1	214-302-1
	3/16	5/8	3/16	2	214-004	214-304	214-004-1	214-304-1
	1/4	3/4	1/4	2-1/2	214-006	214-306	214-006-1	214-306-1
	5/16	7/8	5/16	2-1/2	214-008	214-308	214-008-1	214-308-1
	3/8	7/8	3/8	2-1/2	214-010	214-310	214-010-1	214-310-1
	7/16	1	7/16	2-1/2	214-012	214-312	214-012-1	214-312-1
	1/2	1	1/2	3	214-014	214-314	214-014-1	214-314-1
	5/8	1-1/4	5/8	3-1/2	214-016	214-316	214-016-1	214-316-1
	3/4	1-1/2	3/4	4	214-018	214-318	214-018-1	214-318-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

SQUARE END STRAIGHT FLUTE




2 and 4 Flutes • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Chamfering, countersinking, spotting, and profile milling
- MAP certified quality



Standard, Series 203



Length Key (K)

Standard Stub Long

Cast Iron **K** Steel **P** Hardened **H**

K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	1/8	1/2	1/8	1-1/2	203-102	203-302	203-102-1	203-302-1
	3/16	5/8	3/16	2	203-104	203-304	203-104-1	203-304-1
	7/32	5/8	1/4	2-1/2	203-106	203-306	203-106-1	203-306-1
	1/4	3/4	1/4	2-1/2	203-108	203-308	203-108-1	203-308-1
	5/16	13/16	5/16	2-1/2	203-110	203-310	203-110-1	203-310-1
	3/8	1	3/8	2-1/2	203-112	203-312	203-112-1	203-312-1
	1/2	1	1/2	3	203-114	203-314	203-114-1	203-314-1
	5/8	1-1/4	5/8	3-1/2	203-116	203-316	203-116-1	203-316-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL END STRAIGHT FLUTE




2 and 4 Flutes • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Chamfering, countersinking, spotting, and profile milling
- MAP certified quality



Standard, Series 203



Length Key (K)


Standard Stub Long

Cast Iron **K** Steel **P** Hardened **H**

K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L2	D2	L2				
	1/8	1/2	1/8	1-1/2	203-002	203-202	203-002-1	203-202-1
	3/16	5/8	3/16	2	203-004	203-204	203-004-1	203-204-1
	7/32	5/8	1/4	2-1/2	203-006	203-206	203-006-1	203-206-1
	1/4	3/4	1/4	2-1/2	203-008	203-208	203-008-1	203-208-1
	5/16	13/16	5/16	2-1/2	203-010	203-210	203-010-1	203-210-1
	3/8	1	3/8	2-1/2	203-012	203-212	203-012-1	203-212-1
	1/2	1	1/2	3	203-014	203-214	203-014-1	203-214-1
	5/8	1-1/4	5/8	3-1/2	203-016	203-216	203-016-1	203-216-1


Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

SQUARE MINI MILLS




2 and 4 Flutes • Coated and Uncoated

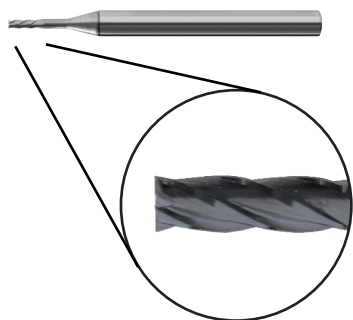- Genuine A-Gr-SiV submicron grain carbide
- Rigid, accurate design for micro applications
- MAP certified quality



Standard, Series 207



Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	.005	.015	1/8	1-1/2	207-102	-	207-102-1	-
	.010	.030	1/8	1-1/2	207-104	207-504	207-104-1	207-504-1
	.015	.045	1/8	1-1/2	207-106	207-506	207-106-1	207-506-1
	.020	.060	1/8	1-1/2	207-108	207-508	207-108-1	207-508-1
	.025	.075	1/8	1-1/2	207-110	207-510	207-110-1	207-510-1
	.030	.090	1/8	1-1/2	207-112	207-512	207-112-1	207-512-1
	.035	.105	1/8	1-1/2	207-114	207-514	207-114-1	207-514-1
	.040	.120	1/8	1-1/2	207-116	207-516	207-116-1	207-516-1
	.045	.135	1/8	1-1/2	207-118	207-518	207-118-1	207-518-1
	.050	.150	1/8	1-1/2	207-120	207-520	207-120-1	207-520-1
	.055	.165	1/8	1-1/2	207-122	207-522	207-122-1	207-522-1
	.060	.180	1/8	1-1/2	207-124	207-524	207-124-1	207-524-1
	.065	.195	1/8	1-1/2	207-126	207-526	207-126-1	207-526-1
	.070	.210	1/8	1-1/2	207-128	207-528	207-128-1	207-528-1
	.075	.225	1/8	1-1/2	207-130	207-530	207-130-1	207-530-1
	.080	.240	1/8	1-1/2	207-132	207-532	207-132-1	207-532-1
	.085	.255	1/8	1-1/2	207-134	207-534	207-134-1	207-534-1
	.090	.270	1/8	1-1/2	207-136	207-536	207-136-1	207-536-1
	.095	.285	1/8	1-1/2	207-138	207-538	207-138-1	207-538-1
	.100	.300	1/8	1-1/2	207-140	207-540	207-140-1	207-540-1
	.105	.315	1/8	1-1/2	207-142	207-542	207-142-1	207-542-1
	.110	.330	1/8	1-1/2	207-144	207-544	207-144-1	207-544-1
	.115	.345	1/8	1-1/2	207-146	207-546	207-146-1	207-546-1
	.120	.360	1/8	1-1/2	207-148	207-548	207-148-1	207-548-1



*Call us regarding 3 flute Mini Mills and other flute configurations.

BALL MINI MILLS



2 and 4 Flutes • Coated and Uncoated

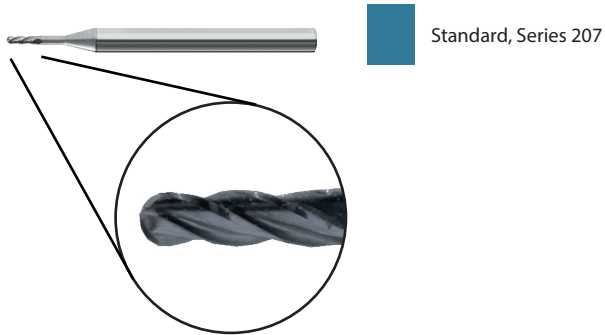- Genuine A-Gr-SiV submicron grain carbide
- Rigid, accurate design for micro applications
- MAP certified quality



Length Key (K)


Standard
 Stub
 Long



K	OD	LOC	SHK	OAL	Uncoated		PowerA	
					2 Flute	4 Flute	2 Flute	4 Flute
	D1	L1	D2	L2				
	.005	.015	1/8	1-1/2	207-002	-	207-002-1	-
	.010	.030	1/8	1-1/2	207-004	207-404	207-004-1	207-404-1
	.015	.045	1/8	1-1/2	207-006	207-406	207-006-1	207-406-1
	.020	.060	1/8	1-1/2	207-008	207-408	207-008-1	207-408-1
	.025	.075	1/8	1-1/2	207-010	207-410	207-010-1	207-410-1
	.030	.090	1/8	1-1/2	207-012	207-412	207-012-1	207-412-1
	.035	.105	1/8	1-1/2	207-014	207-414	207-014-1	207-414-1
	.040	.120	1/8	1-1/2	207-016	207-416	207-016-1	207-416-1
	.045	.135	1/8	1-1/2	207-018	207-418	207-018-1	207-418-1
	.050	.150	1/8	1-1/2	207-020	207-420	207-020-1	207-420-1
	.055	.165	1/8	1-1/2	207-022	207-422	207-022-1	207-422-1
	.060	.180	1/8	1-1/2	207-024	207-424	207-024-1	207-424-1
	.065	.195	1/8	1-1/2	207-026	207-426	207-026-1	207-426-1
	.070	.210	1/8	1-1/2	207-028	207-428	207-028-1	207-428-1
	.075	.225	1/8	1-1/2	207-030	207-430	207-030-1	207-430-1
	.080	.240	1/8	1-1/2	207-032	207-432	207-032-1	207-432-1
	.085	.255	1/8	1-1/2	207-034	207-434	207-034-1	207-434-1
	.090	.270	1/8	1-1/2	207-036	207-436	207-036-1	207-436-1
	.095	.285	1/8	1-1/2	207-038	207-438	207-038-1	207-438-1
	.100	.300	1/8	1-1/2	207-040	207-440	207-040-1	207-440-1
	.105	.315	1/8	1-1/2	207-042	207-442	207-042-1	207-442-1
	.110	.330	1/8	1-1/2	207-044	207-444	207-044-1	207-444-1
	.115	.345	1/8	1-1/2	207-046	207-446	207-046-1	207-446-1
	.120	.360	1/8	1-1/2	207-048	207-448	207-048-1	207-448-1


*Call us regarding 3 flute Mini Mills and other flute configurations.

SQUARE TAPERMILLS



3 Flutes • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Rigid, accurate design for micro applications
- MAP certified quality



Series 208



Series 208, PowerA

Length Key (K)


Standard Stub Long



	SHK	Degree	Small OD	LOC	OAL	Uncoated	PowerA
K	D2	θ	D1	L1	L2	3 Flute	3 Flute
Standard	1/4	5	1/8	3/4	3	208-102	208-102-1
	1/4	7	1/8	1/2	3	208-104	208-104-1
	1/4	10	3/32	1/2	3	208-106	208-106-1
	3/8	5	1/8	1-1/2	3-1/2	208-108	208-108-1
	3/8	7	1/8	3/4	3-1/2	208-110	208-110-1
	3/8	10	1/8	3/4	3-1/2	208-112	208-112-1
	1/2	5	1/4	1-1/4	4	208-114	208-114-1
	1/2	7	3/16	1-1/4	4	208-116	208-116-1
	1/2	10	1/8	1	4	208-118	208-118-1


Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

BALL TAPERMILLS



3 Flutes • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Precise design, great versatility
- MAP certified quality



Series 208



Series 208, PowerA

Length Key (K)

Standard Stub Long



	SHK	Degree	Small OD	LOC	OAL	Uncoated	PowerA
K	D2	θ	D1	L1	L2	3 Flute	3 Flute
Standard	1/4	5	1/8	3/4	3	208-002	208-002-1
	1/4	7	1/8	1/2	3	208-004	208-004-1
	1/4	10	3/32	1/2	3	208-006	208-006-1
	3/8	5	1/8	1-1/2	3-1/2	208-008	208-008-1
	3/8	7	1/8	3/4	3-1/2	208-010	208-010-1
	3/8	10	1/8	3/4	3-1/2	208-012	208-012-1
	1/2	5	1/4	1-1/4	4	208-014	208-014-1
	1/2	7	3/16	1-1/4	4	208-016	208-016-1
	1/2	10	1/8	1	4	208-018	208-018-1

Available with Weldon Flat - Add **W** to part ID for Weldon flat XXX-XXXW

HIGH PERFORMANCE ENDMILLS

- **V4 and V5**
- **HY5**
- **F45**
- **Mold Mills**
- **TwisterMills**
- **Roughers**
- **AxMills**
- **45° HyperMills**
- **55° AlumaZips**

The customized geometries of our High Performance Endmills make these tools problem solvers for challenging milling operations.
















































TABLE OF CONTENTS





	High Performance Features.	38								
	V4 Square Endmills . V4%	40	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	V4 Ball Endmills . V4%	42	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	V4 Corner Radius Endmills V4%	44	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	V5 Square Endmills . V5%	50	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	V5 Ball Endmills. . V5%	51	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	V5 Corner Radius Endmills. . V5%	52	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	HY5 Square Endmills. . HY5%	57	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	HY5 Corner Radius Endmills . HY5%	59	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	F45 6FL Square Endmills . . F45%	65	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	F45 6FL Corner Radius Endmills. F45%	66	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	Mold Mills, Corner Radius Necked	67	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	Mold Mills, CR Necked Long	68	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	Mold Mills, Ball Necked	69	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	Mold Mills, Square Necked	70	Cermet	Hardened H	Cast Iron K	Titanium S		Stainless M	Steel P	
	3FL 60° Helix Twister Mills.	71				Titanium S		Stainless M	Steel P	
	Fine Pitch Roughers	72	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P	
	Medium Pitch Roughers	73	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P	
	Coarse Pitch Roughers	74	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P	
	Square End AxMills. AxMill	75					Non-Ferrous N			
	Ball End AxMills . AxMill	80					Non-Ferrous N			
	Corner Radius AxMills. AxMill	83					Non-Ferrous N			
	Square End Chipbreaker AxMills. AxMill	92					Non-Ferrous N			
	Ball End Chipbreaker AxMills. . AxMill	93					Non-Ferrous N			
	Square End Necked AxMills. AxMill	94					Non-Ferrous N			
	Ball End Necked AxMills . AxMill	95					Non-Ferrous N			
	Corner Radius Necked AxMills. . AxMill	96					Non-Ferrous N			
	45° Hypermills.	97					Non-Ferrous N			
	55° AlumaZips.	97					Non-Ferrous N			

FEATURES AND COATING LEGENDS

Features Legend

	2 Flutes		Plain shank
	3 Flutes		Flat Shank
	4 Flutes		Double End Square
	5 Flutes		Double End Ball
	6 Flutes		Corner Radius
	2 Flutes Ball		3 Flutes Ball
	4 Flutes Ball		5 Flutes Ball
	Square End		Ball End

Coatings Legend


	PowerA Coating		PowerN Coating
	PowerT Coating		PowerZ Coating

Please contact us for our full line of metric products.

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized Volume)

Our superior tungsten carbide gives you the ability to be aggressive when you need to be. Growth inhibitors in our submicron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

HIGH PERFORMANCE TOOL FEATURES



- The variable 4 flute design interrupts harmonic vibrations to provide improved feeds and speeds, superior finishes and longer tool life.
- Ideal for roughing to finishing operations, in both peripheral and slotting functions
- Available in our proprietary and proven PowerA (AlTiN) and the optional nanocomposite PowerNR (nACRo) for difficult-to-machine alloys
- Also see our Ultra Performance V4 line



- An impressive combination of variable flutes, a thicker core and eccentrically-ground relief, adding to performance and value.
- A strong, stable performer sure to provide chatter-free finishes AND aggressive material removal rates.
- Available in PowerA (AlTiN) and nanocomposite PowerNR (nACRo) where tool-life demands the very finest coating available
- 5 Flute design

HIGH PERFORMANCE TOOL FEATURES



- High performing, broad spectrum semi-finisher/finisher
- Outstanding in stainless steels, high temp alloys, mold steels to 45 Rc
- 5 flute, 45° helix, eccentric grind provides a smooth cutting action with superb chip evacuation.
- 20% + increase in productivity versus 4 fluted endmills
- Minimal tool deflection equals better part tolerance
- Stub, standard and long lengths, in square end and corner radius options
- Coated with PowerA (AlTiN)



- 6 flute, high performance finisher providing superb finishes in stainless steels, nickel alloys, Inconels, titanium and more
- 45° degree helix provides superb chip evacuation and excellent shearing action.
- Reduced load pressures and super-stiff design promotes less chatter and the best performance in light finishing applications.
- Coated with PowerA (AlTiN)



- High performance design for aggressive aluminum milling
- Incorporates a high shear, high rake geometry
- 2 and 3 flute, square end, corner radius and ballend styles
- Available in uncoated and optional PowerZ (Zirconium Nitride) coating
- Chipbreaker option where chip control or spindle horsepower is a concern



HyperMill


- Aggressive metal removal rates in aluminum and non-ferrous materials
- 45° helix increases stiffness and improves surface finish.
- 2 Flute design



AlumaZip


- High performance 2 Flute design for high metal removal rates in aluminum and non-ferrous materials
- 55° helix combines a super-stiff profile with a rapid evacuation of chips.
- High helix fluting increases contact area, thereby imparting better surface finishes.

V4 SQUARE ENDMILLS



4 Flutes • Coated • With and without Flat

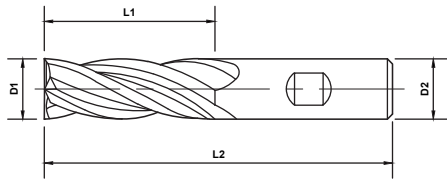- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



- Stub, Series 402, PowerA
- Standard, Series 400, PowerA
- Long, Series 401, PowerA



Length Key (K)


- Standard
- Stub
- Long



Quick Ship Items


K	OD	LOC	SHK	OAL	PowerA	
					No Flat	With Flat
1/8	1/8	1/4	1/8	1-1/2	402-004-1	-
		3/8	1/8	1-1/2	400-002-1	-
5/32	5/32	5/16	3/16	2	402-002-1	-
		7/16	3/16	2	400-004-1	-
3/16	3/16	3/8	3/16	2	402-006-1	-
		7/16	3/16	2	400-006-1	-
		3/4	3/16	2-1/2	400-042-1	-
7/32	7/32	7/16	1/4	2	402-008-1	-
		7/16	1/4	2-1/2	400-008-1	-
1/4	1/4	1/2	1/4	2	402-010-1	402-010W-1
		5/8	1/4	2-1/2	400-010-1	400-010W-1
		3/4	1/4	2-1/2	400-040-1	400-040W-1
		1-1/8	1/4	3	401-002-1	401-002W-1
5/16	5/16	1/2	5/16	2	402-012-1	402-012W-1
		13/16	5/16	2-1/2	400-012-1	400-012W-1
		1-1/8	5/16	3	401-004-1	401-004W-1
11/32	11/32	13/16	3/8	2-1/2	400-014-1	400-014W-1
		5/8	3/8	2	402-014-1	402-014W-1
3/8	3/8	7/8	3/8	2-1/2	400-016-1	400-016W-1
		1-1/8	3/8	3	401-006-1	401-006W-1
15/32	15/32	1	1/2	3	400-018-1	400-018W-1
7/16	7/16	5/8	7/16	2-1/2	402-016-1	402-016W-1
		1	7/16	2-3/4	400-020-1	400-020W-1

V4 SQUARE ENDMILLS



4 Flutes • Coated • With and without Flat

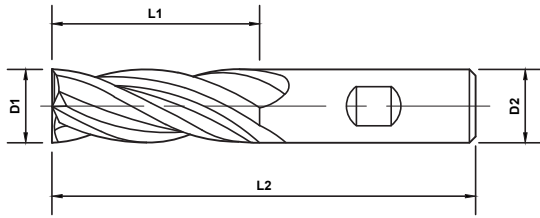- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality




High Performance



Length Key (K)


Standard Stub Long

Quick Ship Items




K	OD	LOC	SHK	OAL	PowerA	
	D1	L1	D2	L2	No Flat	With Flat
1/2	1/2	5/8	1/2	2-1/2	402-018-1	402-018W-1
		1	1/2	3	400-022-1	400-022W-1
		1-1/4	1/2	3	400-024-1	400-024W-1
		2	1/2	4	401-008-1	401-008W-1
9/16	9/16	1-1/8	9/16	3-1/2	400-026-1	400-026W-1
		3/4	5/8	3	402-020-1	402-020W-1
		1-1/4	5/8	3-1/2	400-028-1	400-028W-1
5/8	5/8	2-1/4	5/8	5	401-010-1	401-010W-1
		1	3/4	3	402-024-1	402-024W-1
		7/8	3/4	3-1/2	402-022-1	402-022W-1
		1-1/2	3/4	4	400-030-1	400-030W-1
		1-5/8	3/4	4	400-032-1	400-032W-1
		2-1/4	3/4	5	401-012-1	401-012W-1
3/4	3/4	3	3/4	6	401-014-1	401-014W-1
		4	3/4	6	401-016-1	401-016W-1
		1-1/2	1	4	400-034-1	400-034W-1
		2-1/4	1	5	401-018-1	401-018W-1
1	1	3	1	6	401-020-1	401-020W-1
		4	1	7	401-022-1	401-022W-1

V4 BALL ENDMILLS



4 Flutes • Coated • With and without Flat

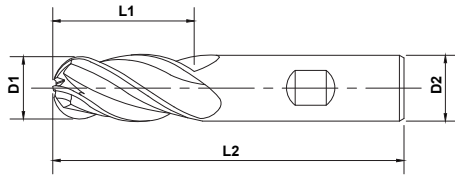- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



- Stub, Series 402, PowerA
- Standard, Series 400, PowerA
- Long, Series 401, PowerA

Length Key (K)


- Standard
- Stub
- Long

Quick Ship Items



K	OD	LOC	SHK	OAL	PowerA	
	D1	L1	D2	L2	No Flat	With Flat
■	1/8	1/4	1/8	1-1/2	402-204-1	-
		3/8	1/8	1-1/2	400-202-1	-
■	5/32	5/16	3/16	2	402-202-1	-
		7/16	3/16	2	400-204-1	-
■	3/16	3/8	3/16	2	402-206-1	-
		7/16	3/16	2	400-206-1	-
		3/4	3/16	2-1/2	400-242-1	-
■	7/32	7/16	1/4	2	402-208-1	-
		7/16	1/4	2-1/2	400-208-1	-
■	1/4	1/2	1/4	2	402-210-1	402-210W-1
		5/8	1/4	2-1/2	400-210-1	400-210W-1
		3/4	1/4	2-1/2	400-240-1	400-240W-1
		1-1/8	1/4	3	401-202-1	401-202W-1
■	5/16	1/2	5/16	2	402-212-1	402-212W-1
		13/16	5/16	2-1/2	400-212-1	400-212W-1
		1-1/8	5/16	3	401-204-1	401-204W-1
■	11/32	13/16	3/8	2-1/2	400-214-1	400-214W-1
		5/8	3/8	2	402-214-1	402-214W-1
■	3/8	7/8	3/8	2-1/2	400-216-1	400-216W-1
		1-1/8	3/8	3	401-206-1	401-206W-1
■	15/32	1	1/2	3	400-218-1	400-218W-1
■	7/16	5/8	7/16	2-1/2	402-216-1	402-216W-1
		1	7/16	2-3/4	400-220-1	400-220W-1


V4 BALL ENDMILLS



4 Flutes • Coated • With and without Flat

- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality

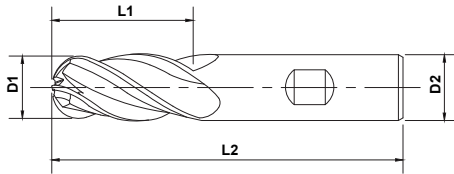High Performance



Length Key (K)


Standard Stub Long

Quick Ship Items




K	OD	LOC	SHK	OAL	PowerA	
	D1	L1	D2	L2	No Flat	With Flat
Standard	1/2	5/8	1/2	2-1/2	402-218-1	402-218W-1
		1	1/2	3	400-222-1	400-222W-1
		1-1/4	1/2	3	400-224-1	400-224W-1
		2	1/2	4	401-208-1	401-208W-1
Standard	9/16	1-1/8	9/16	3-1/2	400-226-1	400-226W-1
Standard	5/8	3/4	5/8	3	402-220-1	402-220W-1
		1-1/4	5/8	3-1/2	400-228-1	400-228W-1
		2-1/4	5/8	5	401-210-1	401-210W-1
Stub	3/4	1	3/4	3	402-224-1	402-224W-1
		7/8	3/4	3-1/2	402-222-1	402-222W-1
		1-1/2	3/4	4	400-230-1	400-230W-1
		1-5/8	3/4	4	400-232-1	400-232W-1
		2-1/4	3/4	5	401-212-1	401-212W-1
		3	3/4	6	401-214-1	401-214W-1
		4	3/4	6	401-216-1	401-216W-1
Long	1	1-1/2	1	4	400-234-1	400-234W-1
		2-1/4	1	5	401-218-1	401-218W-1
		3	1	6	401-220-1	401-220W-1
		4	1	7	401-222-1	401-222W-1

V4 CORNER RADIUS ENDMILLS



4 Flutes • Coated • With and without Flat

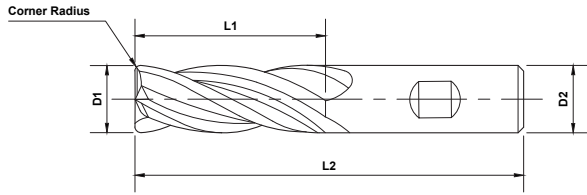- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality




- Stub, Series 402, PowerA
- Standard, Series 400, PowerA
- Long, Series 401, PowerA

Length Key (K)

- Standard
- Stub
- Long

Quick Ship Items




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
1/8	1/8	1/4	1/8	1-1/2	.015	402-401-1	-
		1/4	1/8	1-1/2	.020	402-402-1	-
		1/4	1/8	1-1/2	.030	402-403-1	-
		1/4	1/8	1-1/2	.045	402-404-1	-
		3/8	1/8	1-1/2	.015	400-401-1	-
		3/8	1/8	1-1/2	.020	400-402-1	-
		3/8	1/8	1-1/2	.030	400-403-1	-
		3/8	1/8	1-1/2	.045	400-404-1	-
5/32	5/32	5/16	3/16	2	.015	402-411-1	-
		5/16	3/16	2	.020	402-412-1	-
		5/16	3/16	2	.030	402-413-1	-
		5/16	3/16	2	.045	402-414-1	-
		3/8	3/16	2	.015	402-421-1	-
		3/8	3/16	2	.020	402-422-1	-
		3/8	3/16	2	.030	402-423-1	-
		3/8	3/16	2	.045	402-424-1	-
3/16	3/16	7/16	3/16	2	.015	400-411-1	-
		7/16	3/16	2	.020	400-412-1	-
		7/16	3/16	2	.030	400-413-1	-
		7/16	3/16	2	.045	400-414-1	-
		3/4	3/16	2-1/2	.015	400-531-1	-
		3/4	3/16	2-1/2	.020	400-532-1	-
		3/4	3/16	2-1/2	.030	400-533-1	-
		3/4	3/16	2-1/2	.045	400-534-1	-
7/32	7/32	7/16	1/4	2	.015	402-431-1	-
		7/16	1/4	2	.020	402-432-1	-
		7/16	1/4	2	.030	402-433-1	-
		7/16	1/4	2	.045	402-434-1	-
		7/16	1/4	2	.060	402-435-1	-

V4 CORNER RADIUS ENDMILLS



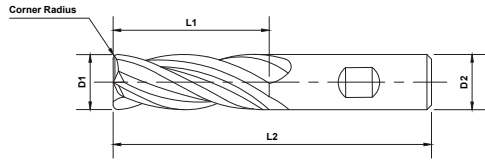4 Flutes • Coated • With and without Flat



High Performance

Length Key (K)


Standard Stub Long

Quick Ship Items




K	OD	LOC	SHK	OAL	Radius	PowerA								
	D1	L1	D2	L2	R	No Flat	With Flat							
1/4	Standard	1/2	1/4	2	.010	402-440-1	402-440W-1							
		1/2	1/4	2	.015	402-441-1	402-441W-1							
		1/2	1/4	2	.020	402-442-1	402-442W-1							
		1/2	1/4	2	.030	402-443-1	402-443W-1							
		1/2	1/4	2	.045	402-444-1	402-444W-1							
		1/2	1/4	2	.060	402-445-1	402-445W-1							
	Stub	Standard	5/8	1/4	2-1/2	.015	400-421-1	400-421W-1						
			5/8	1/4	2-1/2	.020	400-422-1	400-422W-1						
		Long	Standard	5/8	1/4	2-1/2	.030	400-423-1	400-423W-1					
				5/8	1/4	2-1/2	.045	400-424-1	400-424W-1					
			Stub	Standard	5/8	1/4	2-1/2	.060	400-425-1	400-425W-1				
					3/4	1/4	2-1/2	.015	400-541-1	400-541W-1				
				Long	Standard	3/4	1/4	2-1/2	.020	400-542-1	400-542W-1			
						3/4	1/4	2-1/2	.030	400-543-1	400-543W-1			
					Stub	Standard	3/4	1/4	2-1/2	.045	400-544-1	400-544W-1		
							3/4	1/4	2-1/2	.060	400-545-1	400-545W-1		
						Long	Standard	1-1/8	1/4	3	.015	401-401-1	401-401W-1	
								1-1/8	1/4	3	.020	401-402-1	401-402W-1	
							Stub	Standard	1-1/8	1/4	3	.030	401-403-1	401-403W-1
									1-1/8	1/4	3	.045	401-404-1	401-404W-1
5/16	Standard	Stub	1-1/8	1/4	3	.060	401-405-1	401-405W-1						
			Long	Standard	1/2	5/16	2	.015	402-451-1	402-451W-1				
					1/2	5/16	2	.020	402-452-1	402-452W-1				
					1/2	5/16	2	.030	402-453-1	402-453W-1				
					1/2	5/16	2	.045	402-454-1	402-454W-1				
					1/2	5/16	2	.060	402-455-1	402-455W-1				
	Stub	Standard			13/16	5/16	2-1/2	.015	400-431-1	400-431W-1				
			13/16	5/16	2-1/2	.020	400-432-1	400-432W-1						
		Long	Standard	13/16	5/16	2-1/2	.030	400-433-1	400-433W-1					
				13/16	5/16	2-1/2	.045	400-434-1	400-434W-1					
			Stub	Standard	13/16	5/16	2-1/2	.060	400-435-1	400-435W-1				
					1-1/8	5/16	3	.020	401-412-1	401-412W-1				

V4 CORNER RADIUS ENDMILLS



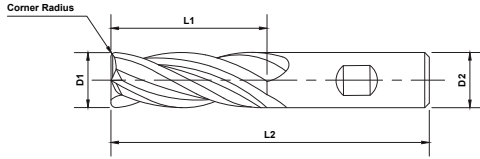4 Flutes • Coated • With and without Flat



Length Key (K)

Standard Stub Long




Quick Ship Items

K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
3/8	3/8	5/8	3/8	2	.015	402-461-1	402-461W-1
		5/8	3/8	2	.020	402-462-1	402-462W-1
		5/8	3/8	2	.030	402-463-1	402-463W-1
		5/8	3/8	2	.045	402-464-1	402-464W-1
		5/8	3/8	2	.060	402-465-1	402-465W-1
		7/8	3/8	2-1/2	.015	400-441-1	400-441W-1
		7/8	3/8	2-1/2	.020	400-442-1	400-442W-1
		7/8	3/8	2-1/2	.030	400-443-1	400-443W-1
		7/8	3/8	2-1/2	.045	400-444-1	400-444W-1
		7/8	3/8	2-1/2	.060	400-445-1	400-445W-1
		1-1/8	3/8	3	.015	401-421-1	401-421W-1
		1-1/8	3/8	3	.020	401-422-1	401-422W-1
		1-1/8	3/8	3	.030	401-423-1	401-423W-1
		1-1/8	3/8	3	.045	401-424-1	401-424W-1
		1-1/8	3/8	3	.060	401-425-1	401-425W-1
7/16	7/16	5/8	7/16	2-1/2	.015	402-471-1	402-471W-1
		5/8	7/16	2-1/2	.020	402-472-1	402-472W-1
		5/8	7/16	2-1/2	.030	402-473-1	402-473W-1
		5/8	7/16	2-1/2	.045	402-474-1	402-474W-1
		5/8	7/16	2-1/2	.060	402-475-1	402-475W-1
		5/8	7/16	2-1/2	.090	402-476-1	402-476W-1
		1	7/16	2-3/4	.015	400-451-1	400-451W-1
		1	7/16	2-3/4	.020	400-452-1	400-452W-1
		1	7/16	2-3/4	.030	400-453-1	400-453W-1
		1	7/16	2-3/4	.045	400-454-1	400-454W-1
1/2	1/2	5/8	1/2	2-1/2	.015	402-481-1	402-481W-1
		5/8	1/2	2-1/2	.020	402-482-1	402-482W-1
		5/8	1/2	2-1/2	.030	402-483-1	402-483W-1
		5/8	1/2	2-1/2	.045	402-484-1	402-484W-1
		5/8	1/2	2-1/2	.060	402-485-1	402-485W-1
		5/8	1/2	2-1/2	.090	402-486-1	402-486W-1
		1	1/2	3	.015	400-461-1	400-461W-1
		1	1/2	3	.020	400-462-1	400-462W-1
		1	1/2	3	.030	400-463-1	400-463W-1
		1	1/2	3	.045	400-464-1	400-464W-1
		1	1/2	3	.060	400-465-1	400-465W-1
		1	1/2	3	.090	400-466-1	400-466W-1
		1	1/2	3	.125	400-467-1	400-467W-1

V4 CORNER RADIUS ENDMILLS



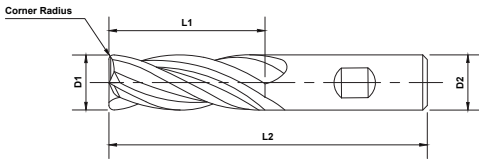4 Flutes • Coated • With and without Flat




High Performance

Length Key (K)


Standard Stub Long

Quick Ship Items




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
1/2	1/2	1-1/4	1/2	3	.015	400-471-1	400-471W-1
		1-1/4	1/2	3	.020	400-472-1	400-472W-1
		1-1/4	1/2	3	.030	400-473-1	400-473W-1
		1-1/4	1/2	3	.045	400-474-1	400-474W-1
		1-1/4	1/2	3	.060	400-475-1	400-475W-1
		1-1/4	1/2	3	.090	400-476-1	400-476W-1
		1-1/4	1/2	3	.125	400-477-1	400-477W-1
		2	1/2	4	.015	401-431-1	401-431W-1
		2	1/2	4	.020	401-432-1	401-432W-1
		2	1/2	4	.030	401-433-1	401-433W-1
		2	1/2	4	.045	401-434-1	401-434W-1
		2	1/2	4	.060	401-435-1	401-435W-1
		2	1/2	4	.090	401-436-1	401-436W-1
		2	1/2	4	.125	401-437-1	401-437W-1
9/16	9/16	1-1/8	9/16	3-1/2	.015	400-481-1	400-481W-1
		1-1/8	9/16	3-1/2	.020	400-482-1	400-482W-1
		1-1/8	9/16	3-1/2	.030	400-483-1	400-483W-1
		1-1/8	9/16	3-1/2	.045	400-484-1	400-484W-1
		1-1/8	9/16	3-1/2	.060	400-485-1	400-485W-1
5/8	5/8	3/4	5/8	3	.015	402-491-1	402-491W-1
		3/4	5/8	3	.020	402-492-1	402-492W-1
		3/4	5/8	3	.030	402-493-1	402-493W-1
		3/4	5/8	3	.045	402-494-1	402-494W-1
		3/4	5/8	3	.060	402-495-1	402-495W-1
		3/4	5/8	3	.090	402-496-1	402-496W-1
		1-1/4	5/8	3-1/2	.015	400-491-1	400-491W-1
		1-1/4	5/8	3-1/2	.020	400-492-1	400-492W-1
		1-1/4	5/8	3-1/2	.030	400-493-1	400-493W-1
		1-1/4	5/8	3-1/2	.045	400-494-1	400-494W-1
		1-1/4	5/8	3-1/2	.060	400-495-1	400-495W-1
		2-1/4	5/8	5	.015	401-441-1	401-441W-1
		2-1/4	5/8	5	.020	401-442-1	401-442W-1
		2-1/4	5/8	5	.030	401-443-1	401-443W-1
		2-1/4	5/8	5	.045	401-444-1	401-444W-1
		2-1/4	5/8	5	.060	401-445-1	401-445W-1
		2-1/4	5/8	5	.090	401-446-1	401-446W-1

V4 CORNER RADIUS ENDMILLS



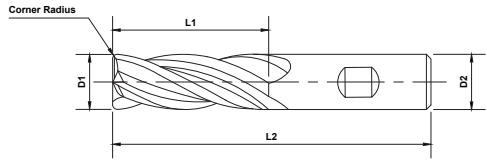4 Flutes • Coated • With and without Flat



Length Key (K)


Standard Stub Long




Quick Ship Items

K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
3/4		1	3/4	3	.015	402-501-1	402-501W-1
		1	3/4	3	.020	402-502-1	402-502W-1
		1	3/4	3	.030	402-503-1	402-503W-1
		1	3/4	3	.045	402-504-1	402-504W-1
		1	3/4	3	.060	402-505-1	402-505W-1
		1	3/4	3	.090	402-506-1	402-506W-1
		7/8	3/4	3-1/2	.015	402-511-1	402-511W-1
		7/8	3/4	3-1/2	.020	402-512-1	402-512W-1
		7/8	3/4	3-1/2	.030	402-513-1	402-513W-1
		7/8	3/4	3-1/2	.045	402-514-1	402-514W-1
		7/8	3/4	3-1/2	.060	402-515-1	402-515W-1
		7/8	3/4	3-1/2	.090	402-516-1	402-516W-1
		1-1/2	3/4	4	.015	400-501-1	400-501W-1
		1-1/2	3/4	4	.020	400-502-1	400-502W-1
		1-1/2	3/4	4	.030	400-503-1	400-503W-1
		1-1/2	3/4	4	.045	400-504-1	400-504W-1
		1-1/2	3/4	4	.060	400-505-1	400-505W-1
		1-1/2	3/4	4	.090	400-506-1	400-506W-1
		1-1/2	3/4	4	.125	400-507-1	400-507W-1
		1-5/8	3/4	4	.015	400-511-1	400-511W-1
		1-5/8	3/4	4	.020	400-512-1	400-512W-1
		1-5/8	3/4	4	.030	400-513-1	400-513W-1
		1-5/8	3/4	4	.045	400-514-1	400-514W-1
		1-5/8	3/4	4	.060	400-515-1	400-515W-1
		1-5/8	3/4	4	.090	400-516-1	400-516W-1
		2-1/4	3/4	5	.015	401-451-1	401-451W-1
		2-1/4	3/4	5	.020	401-452-1	401-452W-1
		2-1/4	3/4	5	.030	401-453-1	401-453W-1
		2-1/4	3/4	5	.060	401-455-1	401-455W-1
		2-1/4	3/4	5	.090	401-456-1	401-456W-1
		2-1/4	3/4	5	.125	401-457-1	401-457W-1
		3	3/4	6	.015	401-461-1	401-461W-1
		3	3/4	6	.020	401-462-1	401-462W-1
3	3/4	6	.030	401-463-1	401-463W-1		
3	3/4	6	.045	401-464-1	401-464W-1		
3	3/4	6	.060	401-465-1	401-465W-1		
3	3/4	6	.090	401-466-1	401-466W-1		

V4 CORNER RADIUS ENDMILLS



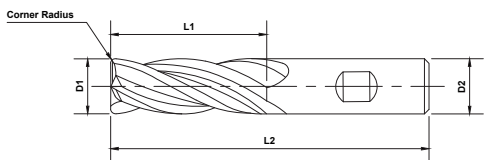4 Flutes • Coated • With and without Flat



High Performance

Length Key (K)


Standard Stub Long

Quick Ship Items




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
3/4	3/4	4	3/4	6	.015	401-471-1	401-471W-1
		4	3/4	6	.020	401-472-1	401-472W-1
		4	3/4	6	.030	401-473-1	401-473W-1
		4	3/4	6	.045	401-474-1	401-474W-1
		4	3/4	6	.060	401-475-1	401-475W-1
		4	3/4	6	.090	401-476-1	401-476W-1
1	1	1-1/2	1	4	.020	400-522-1	400-522W-1
		1-1/2	1	4	.030	400-523-1	400-523W-1
		1-1/2	1	4	.045	400-524-1	400-524W-1
		1-1/2	1	4	.060	400-525-1	400-525W-1
		1-1/2	1	4	.090	400-526-1	400-526W-1
		2-1/4	1	5	.015	401-481-1	401-481W-1
		2-1/4	1	5	.020	401-482-1	401-482W-1
		2-1/4	1	5	.030	401-483-1	401-483W-1
		2-1/4	1	5	.045	401-484-1	401-484W-1
		2-1/4	1	5	.060	401-485-1	401-485W-1
		2-1/4	1	5	.090	401-486-1	401-486W-1
		3	1	6	.015	401-491-1	401-491W-1
		3	1	6	.020	401-492-1	401-492W-1
		3	1	6	.030	401-493-1	401-493W-1
		3	1	6	.045	401-494-1	401-494W-1
		3	1	6	.060	401-495-1	401-495W-1
		3	1	6	.090	401-496-1	401-496W-1
		4	1	7	.015	401-501-1	401-501W-1
		4	1	7	.020	401-502-1	401-502W-1
		4	1	7	.030	401-503-1	401-503W-1
		4	1	7	.045	401-504-1	401-504W-1
4	1	7	.060	401-505-1	401-505W-1		
4	1	7	.090	401-506-1	401-506W-1		

V5 SQUARE ENDMILLS



5 Flutes • Coated • With and without Flat

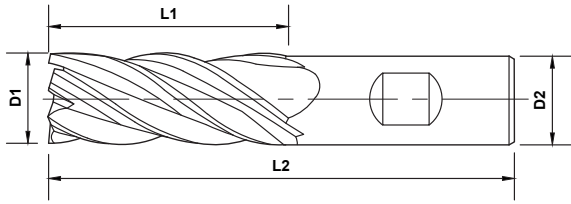- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



- Stub, Series 410, PowerA
- Standard, Series 408, PowerA
- Long, Series 409, PowerA



Length Key (K)

- Standard
- Stub
- Long




K	OD	LOC	SHK	OAL	PowerA	
	D1	L1	D2	L2	No Flat	With Flat
	5/16	1/2	5/16	2	410-012-1	410-012W-1
		13/16	5/16	2-1/2	408-008-1	408-008W-1
	3/8	5/8	3/8	2	410-014-1	410-014W-1
		7/8	3/8	2-1/2	408-010-1	408-010W-1
		1-1/8	3/8	3	409-004-1	409-004W-1
	7/16	5/8	7/16	2-1/2	410-016-1	410-016W-1
		1	7/16	2-3/4	408-012-1	408-012W-1
	1/2	5/8	1/2	2-1/2	410-018-1	410-018W-1
		1	1/2	3	408-014-1	408-014W-1
		1-1/4	1/2	3	408-016-1	408-016W-1
		2	1/2	4	409-006-1	409-006W-1
	9/16	1-1/8	9/16	3-1/2	408-018-1	408-018W-1
		3/4	5/8	3	410-020-1	410-020W-1
	5/8	1-1/4	5/8	3-1/2	408-020-1	408-020W-1
		2-1/4	5/8	5	409-008-1	409-008W-1
		7/8	3/4	3-1/2	410-024-1	410-024W-1
	3/4	1	3/4	3	410-022-1	410-022W-1
		1-5/8	3/4	4	408-022-1	408-022W-1
		1-1/2	3/4	4	408-024-1	408-024W-1
		2-1/4	3/4	5	409-010-1	409-010W-1
		3	3/4	6	409-012-1	409-012W-1
		1-1/2	1	4	408-026-1	408-026W-1
	1	2-1/4	1	5	409-014-1	409-014W-1
		3	1	6	409-016-1	409-016W-1
		4	1	7	409-018-1	409-018W-1

V5 BALL ENDMILLS



5 Flutes • Coated • With and without Flat

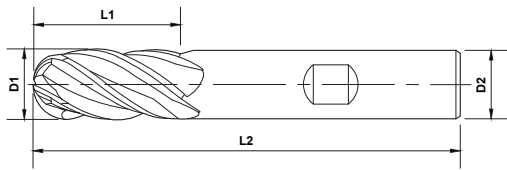- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



- Stub, Series 410, PowerA
- Standard, Series 408, PowerA
- Long, Series 409, PowerA

High Performance


Length Key (K)

■ Standard ■ Stub ■ Long




K	OD	LOC	SHK	OAL	PowerA	
	D1	L1	D2	L2	No Flat	With Flat
■	5/16	1/2	5/16	2	410-212-1	410-212W-1
		13/16	5/16	2-1/2	408-208-1	408-208W-1
■	3/8	5/8	3/8	2	410-214-1	410-214W-1
		7/8	3/8	2-1/2	408-210-1	408-210W-1
■	7/16	1-1/8	3/8	3	409-204-1	409-204W-1
		5/8	7/16	2-1/2	410-216-1	410-216W-1
■	1/2	1	7/16	2-3/4	408-212-1	408-212W-1
		5/8	1/2	2-1/2	410-218-1	410-218W-1
■	9/16	1	1/2	3	408-214-1	408-214W-1
		1-1/4	1/2	3	408-216-1	408-216W-1
■	5/8	2	1/2	4	409-206-1	409-206W-1
		1-1/8	9/16	3-1/2	408-218-1	408-218W-1
■	3/4	3/4	5/8	3	410-220-1	410-220W-1
		1-1/4	5/8	3-1/2	408-220-1	408-220W-1
■	5/8	2-1/4	5/8	5	409-208-1	409-208W-1
		1	3/4	3	410-222-1	410-222W-1
■	3/4	7/8	3/4	3-1/2	410-224-1	410-224W-1
		1-1/2	3/4	4	408-222-1	408-222W-1
■	1	1-5/8	3/4	4	408-224-1	408-224W-1
		2-1/4	3/4	5	409-210-1	409-210W-1
■	1	3	3/4	6	409-212-1	409-212W-1
		1-1/2	1	4	408-226-1	408-226W-1
■	1	2-1/4	1	5	409-214-1	409-214W-1
		3	1	6	409-216-1	409-216W-1
■	1	4	1	7	409-218-1	409-218W-1

V5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat

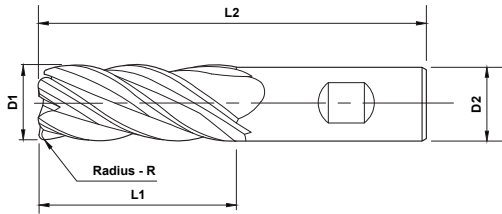
- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



- Stub, Series 410, PowerA
- Standard, Series 408, PowerA
- Long, Series 409, PowerA


Length Key (K)

- Standard
- Stub
- Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
5/16		1/2	5/16	2	.015	410-451-1	410-451W-1
		1/2	5/16	2	.020	410-452-1	410-452W-1
		1/2	5/16	2	.030	410-453-1	410-453W-1
		1/2	5/16	2	.045	410-454-1	410-454W-1
		1/2	5/16	2	.060	410-455-1	410-455W-1
		13/16	5/16	2-1/2	.015	408-431-1	408-431W-1
		13/16	5/16	2-1/2	.020	408-432-1	408-432W-1
		13/16	5/16	2-1/2	.030	408-433-1	408-433W-1
		13/16	5/16	2-1/2	.045	408-434-1	408-434W-1
		13/16	5/16	2-1/2	.060	408-435-1	408-435W-1
3/8		5/8	3/8	2	.015	410-461-1	410-461W-1
		5/8	3/8	2	.020	410-462-1	410-462W-1
		5/8	3/8	2	.030	410-463-1	410-463W-1
		5/8	3/8	2	.045	410-464-1	410-464W-1
		5/8	3/8	2	.060	410-465-1	410-465W-1
		7/8	3/8	2-1/2	.015	408-441-1	408-441W-1
		7/8	3/8	2-1/2	.020	408-442-1	408-442W-1
7/8	3/8	2-1/2	.030	408-443-1	408-443W-1		

V5 CORNER RADIUS ENDMILLS



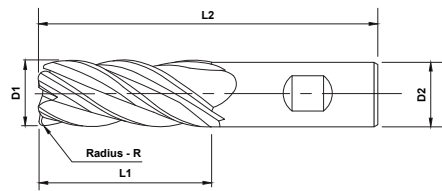5 Flutes • Coated • With and without Flat



- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



High Performance


Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
Standard	3/8	7/8	3/8	2-1/2	.045	408-444-1	408-444W-1
		7/8	3/8	2-1/2	.060	408-445-1	408-445W-1
		1-1/8	3/8	3	.015	409-411-1	409-411W-1
		1-1/8	3/8	3	.020	409-412-1	409-412W-1
		1-1/8	3/8	3	.030	409-413-1	409-413W-1
		1-1/8	3/8	3	.045	409-414-1	409-414W-1
		1-1/8	3/8	3	.060	409-415-1	409-415W-1
Stub	7/16	5/8	7/16	2-1/2	.015	410-471-1	410-471W-1
		5/8	7/16	2-1/2	.020	410-472-1	410-472W-1
		5/8	7/16	2-1/2	.030	410-473-1	410-473W-1
		5/8	7/16	2-1/2	.045	410-474-1	410-474W-1
		5/8	7/16	2-1/2	.060	410-475-1	410-475W-1
		5/8	7/16	2-1/2	.090	410-476-1	410-476W-1
		1	7/16	2-3/4	.015	408-451-1	408-451W-1
		1	7/16	2-3/4	.020	408-452-1	408-452W-1
		1	7/16	2-3/4	.030	408-453-1	408-453W-1
		1	7/16	2-3/4	.045	408-454-1	408-454W-1
		1	7/16	2-3/4	.060	408-455-1	408-455W-1
		1	7/16	2-3/4	.090	408-456-1	408-456W-1
		Long	1/2	5/8	1/2	2-1/2	.015
5/8	1/2			2-1/2	.020	410-482-1	410-482W-1
5/8	1/2			2-1/2	.030	410-483-1	410-483W-1
5/8	1/2			2-1/2	.045	410-484-1	410-484W-1
5/8	1/2			2-1/2	.060	410-485-1	410-485W-1
5/8	1/2			2-1/2	.090	410-486-1	410-486W-1
1	1/2			3	.015	408-461-1	408-461W-1
1	1/2			3	.020	408-462-1	408-462W-1
1	1/2			3	.030	408-463-1	408-463W-1
1	1/2			3	.045	408-464-1	408-464W-1
1	1/2			3	.060	408-465-1	408-465W-1
1	1/2			3	.090	408-466-1	408-466W-1

V5 CORNER RADIUS ENDMILLS



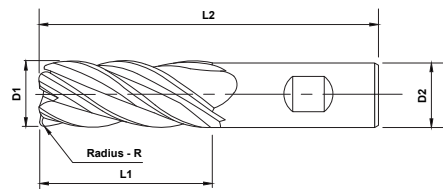5 Flutes • Coated • With and without Flat




- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality




Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
Standard	1/2	1-1/4	1/2	3	.015	408-471-1	408-471W-1
		1-1/4	1/2	3	.020	408-472-1	408-472W-1
		1-1/4	1/2	3	.030	408-473-1	408-473W-1
		1-1/4	1/2	3	.045	408-474-1	408-474W-1
		1-1/4	1/2	3	.060	408-475-1	408-475W-1
		1-1/4	1/2	3	.090	408-476-1	408-476W-1
	Stub	2	1/2	4	.015	409-421-1	409-421W-1
			1/2	4	.020	409-422-1	409-422W-1
			1/2	4	.030	409-423-1	409-423W-1
			1/2	4	.045	409-424-1	409-424W-1
			1/2	4	.060	409-425-1	409-425W-1
			1/2	4	.090	409-426-1	409-426W-1
Standard	9/16	1-1/8	9/16	3-1/2	.015	408-481-1	408-481W-1
		1-1/8	9/16	3-1/2	.020	408-482-1	408-482W-1
		1-1/8	9/16	3-1/2	.030	408-483-1	408-483W-1
		1-1/8	9/16	3-1/2	.045	408-484-1	408-484W-1
		1-1/8	9/16	3-1/2	.060	408-485-1	408-485W-1
		1-1/8	9/16	3-1/2	.090	408-486-1	408-486W-1
Stub	5/8	3/4	5/8	3	.015	410-491-1	410-491W-1
		3/4	5/8	3	.020	410-492-1	410-492W-1
		3/4	5/8	3	.030	410-493-1	410-493W-1
		3/4	5/8	3	.045	410-494-1	410-494W-1
		3/4	5/8	3	.060	410-495-1	410-495W-1
		3/4	5/8	3	.090	410-496-1	410-496W-1
	Standard	1-1/4	5/8	3-1/2	.015	408-491-1	408-491W-1
			5/8	3-1/2	.020	408-492-1	408-492W-1
			5/8	3-1/2	.030	408-493-1	408-493W-1
			5/8	3-1/2	.045	408-494-1	408-494W-1
			5/8	3-1/2	.060	408-495-1	408-495W-1
			5/8	3-1/2	.090	408-496-1	408-496W-1
Standard	2-1/4	5/8	5	.015	409-431-1	409-431W-1	
		5/8	5	.020	409-432-1	409-432W-1	

V5 CORNER RADIUS ENDMILLS



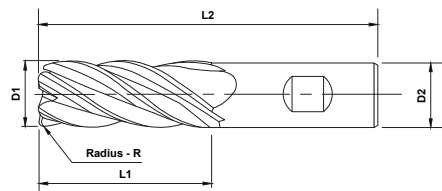5 Flutes • Coated • With and without Flat



- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality



High Performance


Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
5/8	5/8	2-1/4	5/8	5	.030	409-433-1	409-433W-1
		2-1/4	5/8	5	.045	409-434-1	409-434W-1
		2-1/4	5/8	5	.060	409-435-1	409-435W-1
		2-1/4	5/8	5	.090	409-436-1	409-436W-1
3/4	3/4	1	3/4	3	.015	410-501-1	410-501W-1
		1	3/4	3	.020	410-502-1	410-502W-1
		1	3/4	3	.030	410-503-1	410-503W-1
		1	3/4	3	.045	410-504-1	410-504W-1
		1	3/4	3	.060	410-505-1	410-505W-1
		1	3/4	3	.090	410-506-1	410-506W-1
		7/8	3/4	3-1/2	.015	410-511-1	410-511W-1
		7/8	3/4	3-1/2	.020	410-512-1	410-512W-1
		7/8	3/4	3-1/2	.030	410-513-1	410-513W-1
		7/8	3/4	3-1/2	.045	410-514-1	410-514W-1
		7/8	3/4	3-1/2	.060	410-515-1	410-515W-1
		7/8	3/4	3-1/2	.090	410-516-1	410-516W-1
		1-1/2	3/4	4	.015	408-501-1	408-501W-1
		1-1/2	3/4	4	.020	408-502-1	408-502W-1
		1-1/2	3/4	4	.030	408-503-1	408-503W-1
		1-1/2	3/4	4	.045	408-504-1	408-504W-1
		1-1/2	3/4	4	.060	408-505-1	408-505W-1
		1-1/2	3/4	4	.090	408-506-1	408-506W-1
		1-5/8	3/4	4	.015	408-511-1	408-511W-1
		1-5/8	3/4	4	.020	408-512-1	408-512W-1
1-5/8	3/4	4	.030	408-513-1	408-513W-1		
1-5/8	3/4	4	.045	408-514-1	408-514W-1		
1-5/8	3/4	4	.060	408-515-1	408-515W-1		
1-5/8	3/4	4	.090	408-516-1	408-516W-1		
2-1/4	3/4	5	.015	409-441-1	409-441W-1		
2-1/4	3/4	5	.020	409-442-1	409-442W-1		
2-1/4	3/4	5	.030	409-443-1	409-443W-1		
2-1/4	3/4	5	.045	409-444-1	409-444W-1		

V5 CORNER RADIUS ENDMILLS



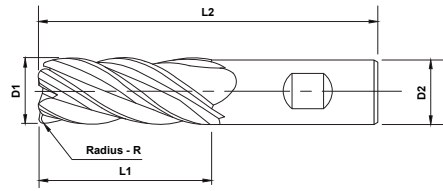5 Flutes • Coated • With and without Flat



- High Performance A-Gr-SiV submicron grain carbide
- Unique variable helix design for faster speeds and feeds
- Quiet operation and better finish
- MAP certified quality




Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
3/4	3/4	2-1/4	3/4	5	.060	409-445-1	409-445W-1
		2-1/4	3/4	5	.090	409-446-1	409-446W-1
		3	3/4	6	.015	409-451-1	409-451W-1
		3	3/4	6	.020	409-452-1	409-452W-1
		3	3/4	6	.030	409-453-1	409-453W-1
		3	3/4	6	.045	409-454-1	409-454W-1
		3	3/4	6	.060	409-455-1	409-455W-1
		3	3/4	6	.090	409-456-1	409-456W-1
1	1	1-1/2	1	4	.015	408-521-1	408-521W-1
		1-1/2	1	4	.020	408-522-1	408-522W-1
		1-1/2	1	4	.030	408-523-1	408-523W-1
		1-1/2	1	4	.045	408-524-1	408-524W-1
		1-1/2	1	4	.060	408-525-1	408-525W-1
		1-1/2	1	4	.090	408-526-1	408-526W-1
		2-1/4	1	5	.015	409-461-1	409-461W-1
		2-1/4	1	5	.020	409-462-1	409-462W-1
		2-1/4	1	5	.030	409-463-1	409-463W-1
		2-1/4	1	5	.045	409-464-1	409-464W-1
		2-1/4	1	5	.060	409-465-1	409-465W-1
		2-1/4	1	5	.090	409-466-1	409-466W-1
		3	1	6	.015	409-471-1	409-471W-1
		3	1	6	.020	409-472-1	409-472W-1
		3	1	6	.030	409-473-1	409-473W-1
		3	1	6	.045	409-474-1	409-474W-1
		3	1	6	.060	409-475-1	409-475W-1
		3	1	6	.090	409-476-1	409-476W-1
		4	1	7	.015	409-481-1	409-481W-1
		4	1	7	.020	409-482-1	409-482W-1
		4	1	7	.030	409-483-1	409-483W-1
		4	1	7	.045	409-484-1	409-484W-1
		4	1	7	.060	409-485-1	409-485W-1
		4	1	7	.090	409-486-1	409-486W-1

HY5 SQUARE ENDMILLS



5 Flutes • Coated • With and without Flat • 45° Helix

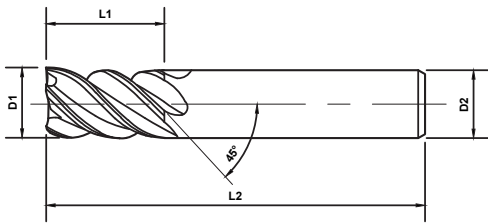
- High Performance A-Gr-SiV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality



- Stub, Series 447, PowerA
- Standard, Series 445, PowerA
- Long, Series 401, PowerA

Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	PowerA	
	D1	L1	D2	L2	No Flat	With Flat
1/8		1/4	1/8	1-1/2	447-004-1	-
		1/2	1/8	1-1/2	445-002-1	-
5/32		5/16	3/16	2	447-002-1	-
		7/16	3/16	2	445-004-1	-
3/16		3/8	3/16	2	447-006-1	-
		7/16	3/16	2	445-006-1	-
7/32		7/16	1/4	2	447-008-1	-
		7/16	1/4	2-1/2	445-008-1	-
1/4		1/2	1/4	2	447-010-1	447-010W-1
		3/4	1/4	2-1/2	445-010-1	445-010W-1
		1-1/8	1/4	3	446-002-1	446-002W-1
5/16		1/2	5/16	2	447-012-1	447-012W-1
		13/16	5/16	2-1/2	445-012-1	445-012W-1
		1-1/8	5/16	3	446-004-1	446-004W-1
11/32		13/16	3/8	2-1/2	445-014-1	445-014W-1
		5/8	3/8	2	447-014-1	447-014W-1
3/8		7/8	3/8	2-1/2	445-016-1	445-016W-1


High Performance

HY5 SQUARE ENDMILLS



5 Flutes • Coated • With and without Flat • 45° Helix

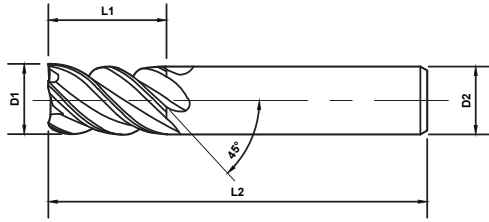- High Performance A-Gr-SiV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality




Length Key (K)

Standard Stub Long



K	OD	LOC	SHK	OAL	PowerA	
					No Flat	With Flat
Standard	3/8	1-1/8	3/8	3	446-006-1	446-006W-1
		1	1/2	3	445-018-1	445-018W-1
Stub	7/16	5/8	7/16	2-1/2	447-016-1	447-016W-1
		1	7/16	2-3/4	445-020-1	445-020W-1
Standard	1/2	5/8	1/2	2-1/2	447-018-1	447-018W-1
		1	1/2	3	445-022-1	445-022W-1
		1-1/4	1/2	3	445-024-1	445-024W-1
		2	1/2	4	446-008-1	446-008W-1
Standard	9/16	1-1/8	9/16	3-1/2	445-026-1	445-026W-1
		3/4	5/8	3	447-020-1	447-020W-1
Stub	5/8	1-1/4	5/8	3-1/2	445-028-1	445-028W-1
		2-1/4	5/8	5	446-010-1	446-010W-1
		1	3/4	3	447-024-1	447-024W-1
Standard	3/4	7/8	3/4	3-1/2	447-022-1	447-022W-1
		1-1/2	3/4	4	445-030-1	445-030W-1
		1-5/8	3/4	4	445-032-1	445-032W-1
		2-1/4	3/4	5	446-012-1	446-012W-1
		3	3/4	6	446-014-1	446-014W-1
		4	3/4	6	446-016-1	446-016W-1
		1-1/2	1	4	445-034-1	445-034W-1
Long	1	2-1/4	1	5	446-018-1	446-018W-1
		3	1	6	446-020-1	446-020W-1
		4	1	7	446-022-1	446-022W-1


HY5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat

- High Performance A-Gr-SiV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality

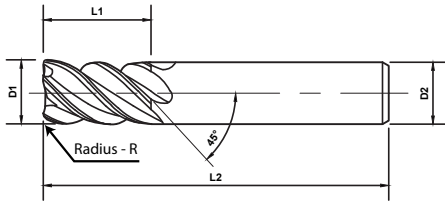
High Performance



- Stub, Series 447, PowerA
- Standard, Series 445, PowerA
- Long, Series 446, PowerA


Length Key (K)

Standard Stub Long



K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
1/8	1/8	1/4	1/8	1-1/2	.015	447-401-1	-
		1/4	1/8	1-1/2	.020	447-402-1	-
		1/4	1/8	1-1/2	.030	447-403-1	-
		1/4	1/8	1-1/2	.045	447-404-1	-
		1/2	1/8	1-1/2	.015	445-401-1	-
		1/2	1/8	1-1/2	.020	445-402-1	-
		1/2	1/8	1-1/2	.030	445-403-1	-
		1/2	1/8	1-1/2	.045	445-404-1	-
5/32	5/32	5/16	3/16	2	.015	447-411-1	-
		5/16	3/16	2	.020	447-412-1	-
		5/16	3/16	2	.030	447-413-1	-
		5/16	3/16	2	.045	447-414-1	-
3/16	3/16	3/8	3/16	2	.015	447-421-1	-
		3/8	3/16	2	.020	447-422-1	-
		3/8	3/16	2	.030	447-423-1	-
		3/8	3/16	2	.045	447-424-1	-
		7/16	3/16	2	.015	445-411-1	-
		7/16	3/16	2	.020	445-412-1	-
		7/16	3/16	2	.030	445-413-1	-
		7/16	3/16	2	.045	445-414-1	-


HY5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat



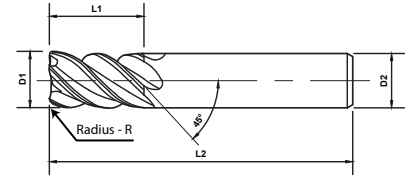- High Performance A-Gr-SiV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality




Length Key (K)



K	OD	LOC	SHK	OAL	Radius	PowerA		
	D1	L1	D2	L2	R	No Flat	With Flat	
7/32	7/16	1/4	1/4	2	.015	447-431-1	-	
		1/4	1/4	2	.020	447-432-1	-	
		1/4	1/4	2	.030	447-433-1	-	
		1/4	1/4	2	.045	447-434-1	-	
		1/4	1/4	2	.060	447-435-1	-	
	1/4	1/2	1/4	1/4	2	.010	447-440-1	447-440W-1
			1/4	1/4	2	.015	447-441-1	447-441W-1
			1/4	1/4	2	.020	447-442-1	447-442W-1
			1/4	1/4	2	.030	447-443-1	447-443W-1
			1/4	1/4	2	.045	447-444-1	447-444W-1
		3/4	1/4	1/4	2-1/2	.015	447-445-1	447-445W-1
			1/4	1/4	2-1/2	.020	445-421-1	445-421W-1
			1/4	1/4	2-1/2	.030	445-422-1	445-422W-1
			1/4	1/4	2-1/2	.045	445-423-1	445-423W-1
			1/4	1/4	2-1/2	.060	445-424-1	445-424W-1
1-1/8	1/4	1/4	3	.015	445-425-1	445-425W-1		
	1/4	1/4	3	.020	446-401-1	446-401W-1		
	1/4	1/4	3	.030	446-402-1	446-402W-1		
	1/4	1/4	3	.045	446-403-1	446-403W-1		
	1/4	1/4	3	.060	446-404-1	446-404W-1		
5/16	1/2	5/16	5/16	2	.015	446-405-1	446-405W-1	
		5/16	5/16	2	.020	447-451-1	447-451W-1	
		5/16	5/16	2	.030	447-452-1	447-452W-1	
		5/16	5/16	2	.045	447-453-1	447-453W-1	
		5/16	5/16	2	.060	447-454-1	447-454W-1	
	13/16	5/16	5/16	2-1/2	.015	447-455-1	447-455W-1	
		5/16	5/16	2-1/2	.020	445-431-1	445-431W-1	
		5/16	5/16	2-1/2	.030	445-432-1	445-432W-1	
		5/16	5/16	2-1/2	.045	445-433-1	445-433W-1	
		5/16	5/16	2-1/2	.060	445-434-1	445-434W-1	
1-1/8	5/16	3	.020	445-435-1	445-435W-1			
1-1/8	5/16	3	.045	445-436-1	445-436W-1			
1-1/8	5/16	3	.060	445-437-1	445-437W-1			
1-1/8	5/16	3	.015	445-438-1	445-438W-1			
1-1/8	5/16	3	.020	445-439-1	445-439W-1			
1-1/8	5/16	3	.030	445-440-1	445-440W-1			
1-1/8	5/16	3	.045	445-441-1	445-441W-1			
1-1/8	5/16	3	.060	445-442-1	445-442W-1			
1-1/8	5/16	3	.015	445-443-1	445-443W-1			
1-1/8	5/16	3	.020	445-444-1	445-444W-1			
1-1/8	5/16	3	.030	445-445-1	445-445W-1			
1-1/8	5/16	3	.045	445-446-1	445-446W-1			
1-1/8	5/16	3	.060	445-447-1	445-447W-1			
1-1/8	5/16	3	.015	445-448-1	445-448W-1			
1-1/8	5/16	3	.020	445-449-1	445-449W-1			
1-1/8	5/16	3	.030	445-450-1	445-450W-1			
1-1/8	5/16	3	.045	445-451-1	445-451W-1			
1-1/8	5/16	3	.060	445-452-1	445-452W-1			
1-1/8	5/16	3	.015	445-453-1	445-453W-1			
1-1/8	5/16	3	.020	445-454-1	445-454W-1			
1-1/8	5/16	3	.030	445-455-1	445-455W-1			
1-1/8	5/16	3	.045	445-456-1	445-456W-1			
1-1/8	5/16	3	.060	445-457-1	445-457W-1			
1-1/8	5/16	3	.015	445-458-1	445-458W-1			
1-1/8	5/16	3	.020	445-459-1	445-459W-1			
1-1/8	5/16	3	.030	445-460-1	445-460W-1			
1-1/8	5/16	3	.045	445-461-1	445-461W-1			
1-1/8	5/16	3	.060	445-462-1	445-462W-1			


HY5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat



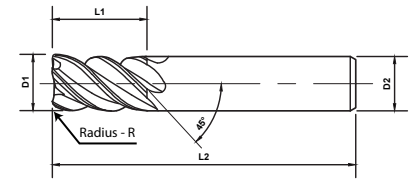- High Performance A-Gr-SiV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality



High Performance

Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	Radius	PowerA	
						No Flat	With Flat
Standard	3/8	5/8	3/8	2	.015	447-461-1	447-461W-1
		5/8	3/8	2	.020	447-462-1	447-462W-1
		5/8	3/8	2	.030	447-463-1	447-463W-1
		5/8	3/8	2	.045	447-464-1	447-464W-1
		5/8	3/8	2	.060	447-465-1	447-465W-1
		7/8	3/8	2-1/2	.015	445-441-1	445-441W-1
		7/8	3/8	2-1/2	.020	445-442-1	445-442W-1
		7/8	3/8	2-1/2	.030	445-443-1	445-443W-1
		7/8	3/8	2-1/2	.045	445-444-1	445-444W-1
		7/8	3/8	2-1/2	.060	445-445-1	445-445W-1
		1-1/8	3/8	3	.015	446-421-1	446-421W-1
		1-1/8	3/8	3	.020	446-422-1	446-422W-1
		1-1/8	3/8	3	.030	446-423-1	446-423W-1
		1-1/8	3/8	3	.045	446-424-1	446-424W-1
		1-1/8	3/8	3	.060	446-425-1	446-425W-1
Stub	7/16	5/8	7/16	2-1/2	.015	447-471-1	447-471W-1
		5/8	7/16	2-1/2	.020	447-472-1	447-472W-1
		5/8	7/16	2-1/2	.030	447-473-1	447-473W-1
		5/8	7/16	2-1/2	.045	447-474-1	447-474W-1
		5/8	7/16	2-1/2	.060	447-475-1	447-475W-1
		5/8	7/16	2-1/2	.090	447-476-1	447-476W-1
		1	7/16	2-3/4	.015	445-451-1	445-451W-1
		1	7/16	2-3/4	.020	445-452-1	445-452W-1
		1	7/16	2-3/4	.030	445-453-1	445-453W-1
		1	7/16	2-3/4	.060	445-456-1	445-456W-1
Standard	1/2	5/8	1/2	2-1/2	.015	447-481-1	447-481W-1
		5/8	1/2	2-1/2	.020	447-482-1	447-482W-1
		5/8	1/2	2-1/2	.030	447-483-1	447-483W-1
		5/8	1/2	2-1/2	.045	447-484-1	447-484W-1
		5/8	1/2	2-1/2	.060	447-485-1	447-485W-1
		5/8	1/2	2-1/2	.090	447-486-1	447-486W-1




HY5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat

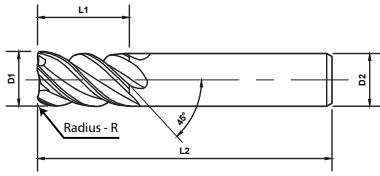- High Performance A-Gr-SIV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality




Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
Standard	1/2	1	1/2	3	.015	445-461-1	445-461W-1
		1	1/2	3	.020	445-462-1	445-462W-1
		1	1/2	3	.030	445-463-1	445-463W-1
		1	1/2	3	.045	445-464-1	445-464W-1
		1	1/2	3	.060	445-465-1	445-465W-1
		1	1/2	3	.090	445-466-1	445-466W-1
		1	1/2	3	.125	445-467-1	445-467W-1
		1-1/4	1/2	3	.015	445-471-1	445-471W-1
		1-1/4	1/2	3	.020	445-472-1	445-472W-1
		1-1/4	1/2	3	.030	445-473-1	445-473W-1
		1-1/4	1/2	3	.045	445-474-1	445-474W-1
		1-1/4	1/2	3	.060	445-475-1	445-475W-1
		1-1/4	1/2	3	.090	445-476-1	445-476W-1
		1-1/4	1/2	3	.125	445-477-1	445-477W-1
		2	1/2	4	.015	446-431-1	446-431W-1
		2	1/2	4	.020	446-432-1	446-432W-1
2	1/2	4	.030	446-433-1	446-433W-1		
2	1/2	4	.045	446-434-1	446-434W-1		
2	1/2	4	.060	446-435-1	446-435W-1		
2	1/2	4	.090	446-436-1	446-436W-1		
2	1/2	4	.125	446-437-1	446-437W-1		
Standard	9/16	1-1/8	9/16	3-1/2	.015	445-481-1	445-481W-1
		1-1/8	9/16	3-1/2	.020	445-482-1	445-482W-1
		1-1/8	9/16	3-1/2	.030	445-483-1	445-483W-1
		1-1/8	9/16	3-1/2	.045	445-484-1	445-484W-1
		1-1/8	9/16	3-1/2	.060	445-485-1	445-485W-1
Stub	5/8	3/4	5/8	3	.015	447-491-1	447-491W-1
		3/4	5/8	3	.020	447-492-1	447-492W-1
		3/4	5/8	3	.030	447-493-1	447-493W-1
		3/4	5/8	3	.045	447-494-1	447-494W-1
		3/4	5/8	3	.060	447-495-1	447-495W-1
		3/4	5/8	3	.090	447-496-1	447-496W-1
		1-1/4	5/8	3-1/2	.015	445-491-1	445-491W-1
		1-1/4	5/8	3-1/2	.020	445-492-1	445-492W-1
		1-1/4	5/8	3-1/2	.030	445-493-1	445-493W-1

HY5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat

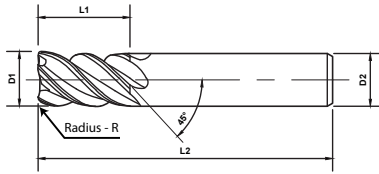- High Performance A-Gr-SiV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality



Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
5/8	5/8	1-1/4	5/8	3-1/2	.045	445-494-1	445-494W-1
		1-1/4	5/8	3-1/2	.060	445-495-1	445-495W-1
		2-1/4	5/8	5	.015	446-441-1	446-441W-1
		2-1/4	5/8	5	.020	446-442-1	446-442W-1
		2-1/4	5/8	5	.030	446-443-1	446-443W-1
		2-1/4	5/8	5	.045	446-444-1	446-444W-1
		2-1/4	5/8	5	.060	446-445-1	446-445W-1
3/4	3/4	1	3/4	3	.015	447-501-1	447-501W-1
		1	3/4	3	.020	447-502-1	447-502W-1
		1	3/4	3	.030	447-503-1	447-503W-1
		1	3/4	3	.045	447-504-1	447-504W-1
		1	3/4	3	.060	447-505-1	447-505W-1
		1	3/4	3	.090	447-506-1	447-506W-1
		7/8	3/4	3-1/2	.015	447-511-1	447-511W-1
		7/8	3/4	3-1/2	.020	447-512-1	447-512W-1
		7/8	3/4	3-1/2	.030	447-513-1	447-513W-1
		7/8	3/4	3-1/2	.045	447-514-1	447-514W-1
		7/8	3/4	3-1/2	.060	447-515-1	447-515W-1
		7/8	3/4	3-1/2	.090	447-516-1	447-516W-1
		1-1/2	3/4	4	.015	445-501-1	445-501W-1
		1-1/2	3/4	4	.020	445-502-1	445-502W-1
		1-1/2	3/4	4	.030	445-503-1	445-503W-1
		1-1/2	3/4	4	.045	445-504-1	445-504W-1
		1-1/2	3/4	4	.060	445-505-1	445-505W-1
		1-1/2	3/4	4	.090	445-506-1	445-506W-1
		1-1/2	3/4	4	.125	445-507-1	445-507W-1
		1-5/8	3/4	4	.015	445-511-1	445-511W-1
		1-5/8	3/4	4	.020	445-512-1	445-512W-1
		1-5/8	3/4	4	.030	445-513-1	445-513W-1
		1-5/8	3/4	4	.045	445-514-1	445-514W-1
		1-5/8	3/4	4	.060	445-515-1	445-515W-1
		1-5/8	3/4	4	.090	445-516-1	445-516W-1
		2-1/4	3/4	5	.015	446-451-1	446-451W-1
		2-1/4	3/4	5	.020	446-452-1	446-452W-1
		2-1/4	3/4	5	.030	446-453-1	446-453W-1
2-1/4	3/4	5	.060	446-455-1	446-455W-1		

High Performance




HY5 CORNER RADIUS ENDMILLS



5 Flutes • Coated • With and without Flat

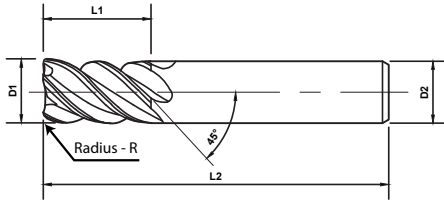- High Performance A-Gr-SIV submicron grain carbide
- Unique 5 flute design for faster speeds and feeds
- MAP certified quality




Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerA	
	D1	L1	D2	L2	R	No Flat	With Flat
3/4		2-1/4	3/4	5	.090	446-456-1	446-456W-1
		2-1/4	3/4	5	.125	446-457-1	446-457W-1
		3	3/4	6	.015	446-461-1	446-461W-1
		3	3/4	6	.020	446-462-1	446-462W-1
		3	3/4	6	.030	446-463-1	446-463W-1
		3	3/4	6	.045	446-464-1	446-464W-1
		3	3/4	6	.060	446-465-1	446-465W-1
		3	3/4	6	.090	446-466-1	446-466W-1
		4	3/4	6	.015	446-471-1	446-471W-1
		4	3/4	6	.020	446-472-1	446-472W-1
		4	3/4	6	.030	446-473-1	446-473W-1
		4	3/4	6	.045	446-474-1	446-474W-1
		4	3/4	6	.060	446-475-1	446-475W-1
		4	3/4	6	.090	446-476-1	446-476W-1
1		1-1/2	1	4	.020	445-522-1	445-522W-1
		1-1/2	1	4	.030	445-523-1	445-523W-1
		1-1/2	1	4	.045	445-524-1	445-524W-1
		1-1/2	1	4	.060	445-525-1	445-525W-1
		1-1/2	1	4	.090	445-526-1	445-526W-1
		2-1/4	1	5	.015	446-481-1	446-481W-1
		2-1/4	1	5	.020	446-482-1	446-482W-1
		2-1/4	1	5	.030	446-483-1	446-483W-1
		2-1/4	1	5	.045	446-484-1	446-484W-1
		2-1/4	1	5	.060	446-485-1	446-485W-1
		2-1/4	1	5	.090	446-486-1	446-486W-1
		3	1	6	.015	446-491-1	446-491W-1
		3	1	6	.020	446-492-1	446-492W-1
		3	1	6	.030	446-493-1	446-493W-1
		3	1	6	.045	446-494-1	446-494W-1
		3	1	6	.060	446-495-1	446-495W-1
		3	1	6	.090	446-496-1	446-496W-1
		4	1	7	.015	446-501-1	446-501W-1
		4	1	7	.020	446-502-1	446-502W-1
		4	1	7	.030	446-503-1	446-503W-1
		4	1	7	.045	446-504-1	446-504W-1
		4	1	7	.060	446-505-1	446-505W-1
4	1	7	.090	446-506-1	446-506W-1		

F45 6FL SQUARE ENDMILLS



6 Flutes • Coated and Uncoated

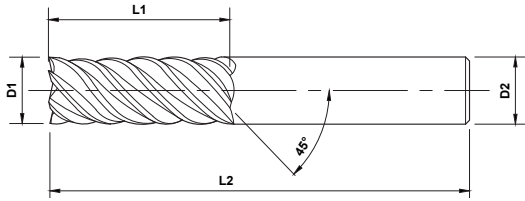- High Performance A-Gr-SiV submicron grain carbide
- 45° 6 flute design for superior finish
- MAP certified quality



High Performance




Standard, Series 411



Standard, Series 411, PowerA


Length Key (K)

Standard Stub Long




	OD	LOC	SHK	OAL	Uncoated	PowerA	
K	D1	L1	D2	L2			
Standard	3/16	5/8	3/16	2	411-002	411-002-1	
	1/4	3/4	1/4	2-1/2	411-004	411-004-1	
	5/16	7/8	5/16	2-1/2	411-006	411-006-1	
	3/8	1	3/8	2-1/2	411-008	411-008-1	
	7/16	1	7/16	2-1/2	411-010	411-010-1	
	1/2	1	1/2	3	411-012	411-012-1	
	9/16	1	9/16	3	411-014	411-014-1	
	5/8	1-1/4	5/8	3-1/2	411-016	411-016-1	
	3/4	1-1/2	3/4	4	411-018	411-018-1	
	7/8	1-1/2	7/8	4	411-020	411-020-1	
	Stub	1	1-1/2	1	4	411-022	411-022-1
			2-1/4	1	5	411-024	411-024-1

F45 6FL CORNER RADIUS ENDMILLS




6 Flutes • Coated and Uncoated

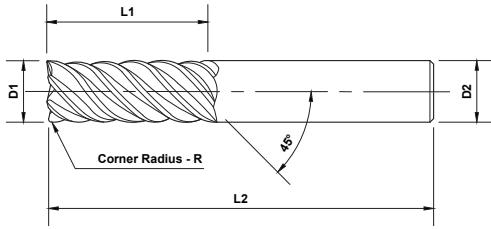- High Performance A-Gr-SiV submicron grain carbide
- 45° 6 flute design for superior finish
- MAP certified quality




Standard, Series 411



Standard, Series 411, PowerA


Length Key (K)

Standard Stub Long



	OD	LOC	SHK	OAL	Radius	Uncoated	PowerA
K	D1	L1	D2	L2	R	6 Flute	6 Flute
	1/4	3/4	1/4	2-1/2	.010	411-200	411-200-1
	5/16	7/8	5/16	2-1/2	.012	411-210	411-210-1
	3/8	1	3/8	2-1/2	.012	411-220	411-220-1
	7/16	1	7/16	2-1/2	.015	411-231	411-231-1
	1/2	1	1/2	3	.015	411-241	411-241-1
	9/16	1	9/16	3	.020	411-252	411-252-1
	5/8	1-1/4	5/8	3-1/2	.020	411-262	411-262-1
	3/4	1-1/2	3/4	4	.030	411-273	411-273-1
	7/8	1-1/2	7/8	4	.030	411-283	411-283-1
	1	1-1/2	1	4	.030	411-293	411-293-1

MOLD MILLS




CORNER RADIUS NECKED

4 and 6 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Superb quality for mold and die operation
- MAP certified quality

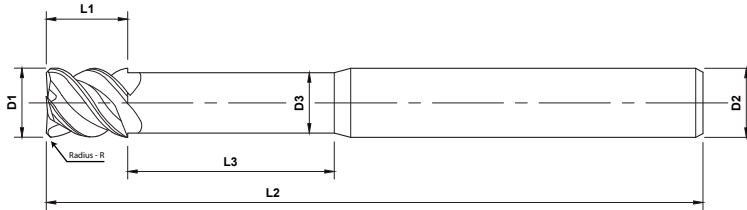
High Performance



Long, Series 440


Length Key (K)

Standard Stub Long



K	OD	LOC	SHK	OAL	Neck OD	Neck Length	Radius	Uncoated		PowerA		PowerN	
								4 Flute	6 Flute	4 Flute	6 Flute	4 Flute	6 Flute
1/8	1/8	1/8	1/8	2-1/4	.115	1/2	.010	440-002	-	440-002-1	-	440-002-5	-
				2-1/4	.115	1/2	.015	440-004	-	440-004-1	-	440-004-5	-
				2-1/4	.115	1/2	.020	440-006	-	440-006-1	-	440-006-5	-
3/16	3/16	3/16	2-1/2	.175	1/2	.010	440-008	-	440-008-1	-	440-008-5	-	
				.175	1/2	.020	440-010	-	440-010-1	-	440-010-5	-	
				.175	1/2	.030	440-012	-	440-012-1	-	440-012-5	-	
1/4	1/4	1/4	2-1/2	.230	3/4	.010	-	440-014	-	440-014-1	-	440-014-5	
				.230	3/4	.020	-	440-016	-	440-016-1	-	440-016-5	
				.230	3/4	.030	-	440-018	-	440-018-1	-	440-018-5	
				3	3/4	.030	-	440-020	-	440-020-1	-	440-020-5	
3/8	3/8	3/8	3	.345	1	.010	-	440-022	-	440-022-1	-	440-022-5	
				.345	1	.020	-	440-024	-	440-024-1	-	440-024-5	
				.345	1	.030	-	440-026	-	440-026-1	-	440-026-5	
1/2	1/2	1/2	3-1/2	.460	1	.015	-	440-028	-	440-028-1	-	440-028-5	
				.460	1	.030	-	440-030	-	440-030-1	-	440-030-5	
				.460	1	.060	-	440-032	-	440-032-1	-	440-032-5	
				4	1	.060	-	440-034	-	440-034-1	-	440-034-5	


MOLD MILLS



CORNER RADIUS NECKED LONG

4 and 6 Flutes • Coated and Uncoated

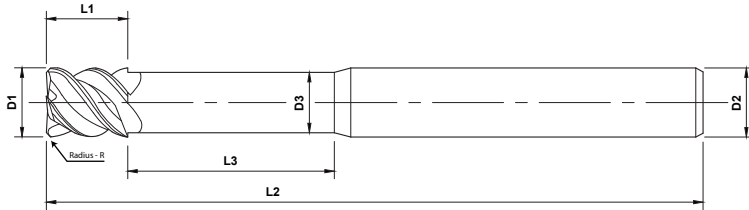- High Performance A-Gr-SiV submicron grain carbide
- Superb quality for mold and die operation
- MAP certified quality



Long, Series 440


Length Key (K)

Standard Stub Long



K	OD	LOC	SHK	OAL	Neck OD	Neck Len.	Radius	Uncoated		PowerA		PowerN	
								4 Flute	6 Flute	4 Flute	6 Flute	4 Flute	6 Flute
1/8	1/8	1/8	1/8	4	0.115	1-1/4	.010	440-202	-	440-202-1	-	440-202-5	-
		1/8	1/8	4	0.115	1-1/4	.015	440-204	-	440-204-1	-	440-204-5	-
		1/8	1/8	4	0.115	1-1/4	.020	440-206	-	440-206-1	-	440-206-5	-
	3/16	3/16	3/16	4	0.175	1-1/2	.010	440-208	-	440-208-1	-	440-208-5	-
		3/16	3/16	4	0.175	1-1/2	.020	440-210	-	440-210-1	-	440-210-5	-
		3/16	3/16	4	0.175	1-1/2	.030	440-212	-	440-212-1	-	440-212-5	-
	1/4	1/4	1/4	6	0.230	2	.010	-	440-214	-	440-214-1	-	440-214-5
		1/4	1/4	6	0.230	2	.020	-	440-216	-	440-216-1	-	440-216-5
		1/4	1/4	6	0.230	2	.030	-	440-218	-	440-218-1	-	440-218-5
	3/8	3/8	3/8	6	0.345	2-1/4	.010	-	440-220	-	440-220-1	-	440-220-5
		3/8	3/8	6	0.345	2-1/4	.020	-	440-222	-	440-222-1	-	440-222-5
		3/8	3/8	6	0.345	2-1/4	.030	-	440-224	-	440-224-1	-	440-224-5
	1/2	1/2	1/2	6	0.460	2-1/2	.015	-	440-226	-	440-226-1	-	440-226-5
		1/2	1/2	6	0.460	2-1/2	.030	-	440-228	-	440-228-1	-	440-228-5
		1/2	1/2	6	0.460	2-1/2	.060	-	440-230	-	440-230-1	-	440-230-5

MOLD MILLS




BALL NECKED

2 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Superb quality for mold and die operation
- MAP certified quality

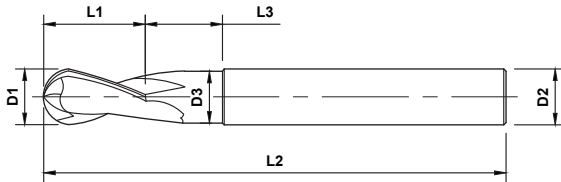
High Performance



Standard, Series 440


Length Key (K)

Standard Stub Long



	OD	LOC	SHK	OAL	Neck OD	Neck Length	Uncoated	PowerA	PowerN
K	D1	L1	D2	L2	D3	L3			
	1/32	1/32	1/8	2-1/2	.027	3/32	440-402	440-402-1	440-402-5
		1/16	1/8	2-1/2	.053	3/16	440-404	440-404-1	440-404-5
	1/16	1/16	1/4	2	.053	3/16	440-406	440-406-1	440-406-5
		1/16	1/4	2-1/2	.053	3/16	440-408	440-408-1	440-408-5
	5/64	1/8	1/8	2	.067	3/16	440-410	440-410-1	440-410-5
		1/8	1/8	3	.115	3/8	440-412	440-412-1	440-412-5
	1/8	1/8	1/4	2-1/4	.115	3/8	440-414	440-414-1	440-414-5
		1/8	1/4	3	.115	3/8	440-416	440-416-1	440-416-5
	3/16	3/16	3/16	3	.175	9/16	440-418	440-418-1	440-418-5
		3/16	3/16	4	.175	9/16	440-420	440-420-1	440-420-5
		3/16	1/4	2-1/4	.175	9/16	440-422	440-422-1	440-422-5
		3/16	1/4	3	.175	9/16	440-424	440-424-1	440-424-5
	1/4	1/4	1/4	2-1/4	.230	3/4	440-426	440-426-1	440-426-5
		1/4	1/4	3	.230	1-1/2	440-428	440-428-1	440-428-5
	5/16	5/16	5/16	3	.285	1	440-430	440-430-1	440-430-5
		3/8	3/8	2-1/2	.345	5/8	440-432	440-432-1	440-432-5
	3/8	3/8	3/8	3-1/2	.345	1-1/8	440-434	440-434-1	440-434-5
		1/2	1/2	3	.460	3/4	440-436	440-436-1	440-436-5
	1/2	1/2	1/2	4	.460	1-1/8	440-438	440-438-1	440-438-5
		5/8	5/8	4-1/2	.575	2-1/4	440-440	440-440-1	440-440-5


MOLD MILLS



SQUARE NECKED

2 Flutes • Coated and Uncoated

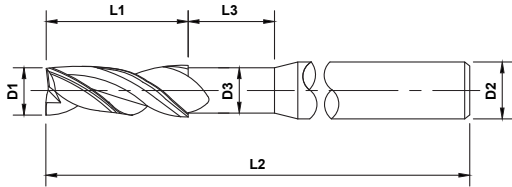- High Performance A-Gr-SiV submicron grain carbide
- Superb quality for mold and die operation
- MAP certified quality



Standard, Series 441


Length Key (K)

Standard Stub Long



	OD	LOC	SHK	OAL	Neck OD	Neck Length	Uncoated	PowerA	PowerN
K	D1	L1	D2	L2	D3	L3			
	1/8	5/32	1/8	1-1/2	.115	3/8	441-202	441-202-1	441-202-5
	3/16	1/4	3/16	2	.175	1/2	441-204	441-204-1	441-204-5
	1/4	5/16	1/4	2-1/2	.230	1/2	441-206	441-206-1	441-206-5
	5/16	3/8	5/16	2-1/2	.288	1/2	441-208	441-208-1	441-208-5
	3/8	7/16	3/8	2-1/2	.345	1/2	441-210	441-210-1	441-210-5
	7/16	1/2	7/16	3	.403	9/16	441-212	441-212-1	441-212-5
	1/2	9/16	1/2	3	.460	5/8	441-214	441-214-1	441-214-5
	5/8	3/4	5/8	3-1/2	.575	3/4	441-216	441-216-1	441-216-5
	3/4	13/16	3/4	4	.710	7/8	441-218	441-218-1	441-218-5


3FL 60° HELIX TWISTERMILLS



3 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- 60° Helix for stainless steels and hi-temp alloys
- MAP certified quality

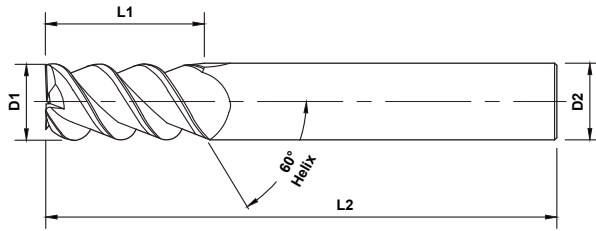High Performance



Standard, Series 432


Length Key (K)

Standard Stub Long



	OD	LOC	SHK	OAL	Uncoated	PowerA	PowerZ
K	D1	L1	D2	L2			
	1/8	5/8	1/8	1-1/2	432-002	432-002-1	432-002-4
	1/4	3/4	1/4	2-1/2	432-004	432-004-1	432-004-4
	7/16	1	7/16	3	432-006	432-006-1	432-006-4
	5/16	13/16	5/16	2-1/2	432-008	432-008-1	432-008-4
	3/8	1	3/8	2-1/2	432-010	432-010-1	432-010-4
	1/2	1	1/2	3	432-012	432-012-1	432-012-4
	5/8	1-1/4	5/8	3-1/2	432-014	432-014-1	432-014-4
	3/4	1-1/2	3/4	4	432-016	432-016-1	432-016-4
	1	1-1/2	1	4	432-018	432-018-1	432-018-4



ROUGHERS



FINE PITCH

3, 4 and 6 Flutes • Coated and Uncoated • With and without flat

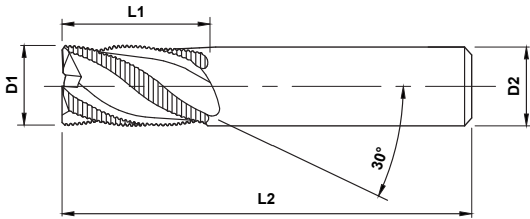- High Performance A-Gr-SiV submicron grain carbide
- Rigid design for fast material removal
- MAP certified quality



Standard, Series 433, PowerA



Standard, Series 433, PowerZ

Length Key (K)


Standard Stub Long



	OD	LOC	SHK	OAL	Flutes	Uncoated	PowerA	PowerZ
K	D1	L1	D2	L2				
	1/4	3/4	1/4	2-1/2	3	433-102	433-102-1	433-102-4
	5/16	3/4	5/16	2-1/2	3	433-104	433-104-1	433-104-4
	3/8	7/8	3/8	2-1/2	3	433-106	433-106-1	433-106-4
	1/2	1	1/2	3	4	433-108W	433-108W-1	433-108W-4
	5/8	1-1/4	5/8	3-1/2	4	433-110W	433-110W-1	433-110W-4
	3/4	1-1/2	3/4	4	4	433-112W	433-112W-1	433-112W-4
	1	1-1/2	1	4	6	433-114W	433-114W-1	433-114W-4

'W' appended to a part number indicates this tool is manufactured with a flat on the shank.

ROUGHERS




MEDIUM PITCH

3, 4 and 5 Flutes • Coated and Uncoated • With and without flat

- High Performance A-Gr-SiV submicron grain carbide
- Rigid design for fast material removal
- MAP certified quality

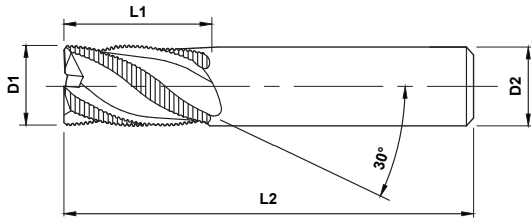High Performance




Standard, Series 433, PowerA



Standard, Series 433, PowerZ

Length Key (K)


Standard (dark blue square) Stub (light blue square) Long (dark blue square)



	OD	LOC	SHK	OAL	Flutes	Uncoated	PowerA	PowerZ
K	D1	L1	D2	L2				
Standard	1/4	3/4	1/4	2-1/2	3	433-202	433-202-1	433-202-4
	5/16	3/4	5/16	2-1/2	3	433-204	433-204-1	433-204-4
	3/8	7/8	3/8	2-1/2	3	433-206	433-206-1	433-206-4
	1/2	1	1/2	3	4	433-208W	433-208W-1	433-208W-4
	5/8	1-1/4	5/8	3-1/2	4	433-210W	433-210W-1	433-210W-4
	3/4	1-1/2	3/4	4	4	433-212W	433-212W-1	433-212W-4
	1	1-1/2	1	4	5	433-214W	433-214W-1	433-214W-4

*'W' appended to a part number indicates this tool is manufactured with a flat on the shank.


ROUGHERS



COARSE PITCH

3 Flutes • Coated and Uncoated • With and without flat

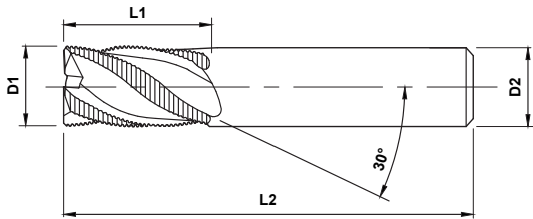- High Performance A-Gr-SiV submicron grain carbide
- Rigid design for fast material removal
- MAP certified quality



Standard, Series 433, PowerA



Standard, Series 433, PowerZ

Length Key (K)


Standard Stub Long



	OD	LOC	SHK	OAL	Flutes	Uncoated	PowerA	PowerZ
K	D1	L1	D2	L2				
	1/4	3/4	1/4	2-1/2	3	433-002	433-002-1	433-002-4
	5/16	3/4	5/16	2-1/2	3	433-004	433-004-1	433-004-4
	3/8	7/8	3/8	2-1/2	3	433-006	433-006-1	433-006-4
	1/2	1	1/2	3	3	433-008W	433-008W-1	433-008W-4
	5/8	1-1/4	5/8	3-1/2	3	433-010W	433-010W-1	433-010W-4
	3/4	1-1/2	3/4	4	3	433-012W	433-012W-1	433-012W-4
	1	1-1/2	1	4	3	433-014W	433-014W-1	433-014W-4

'W' appended to a part number indicates this tool is manufactured with a flat on the shank.



SQUARE END AXMILLS



2 and 3 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

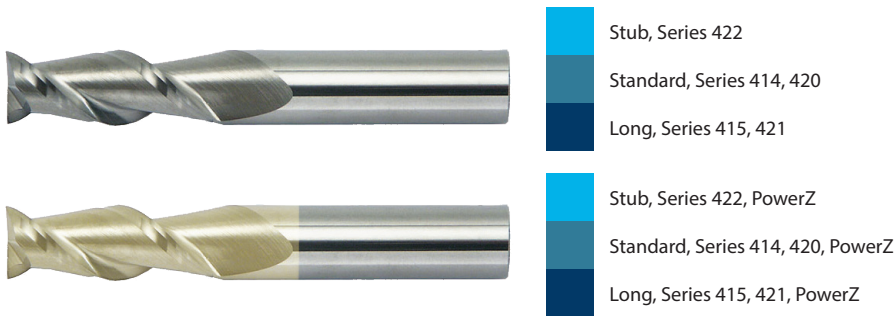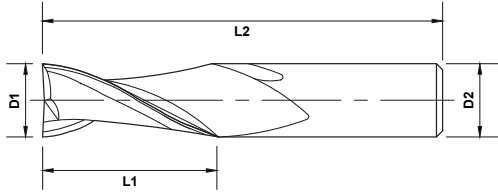High Performance



- Stub, Series 422
- Standard, Series 414, 420
- Long, Series 415, 421
- Stub, Series 422, PowerZ
- Standard, Series 414, 420, PowerZ
- Long, Series 415, 421, PowerZ

Length Key (K)

- Standard
- Stub
- Long




Quick Ship Items


K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
					2 Flute	3 Flute	2 Flute	3 Flute
1/8	D1	1/4	1/8	1-1/2	-	422-002	-	422-002-4
		5/16	1/8	1-1/2	-	422-004	-	422-004-4
		3/8	1/8	1-1/2	-	422-006	-	422-006-4
		1/2	1/8	1-1/2	414-002	420-002	414-002-4	420-002-4
		1/2	1/8	2	-	421-070	-	421-070-4
		5/8	1/8	2	415-002	421-002	415-002-4	421-002-4
		3/4	1/8	2	415-004	421-004	415-004-4	421-004-4
		1	1/8	2-1/2	-	421-072	-	421-072-4
		1/4	1/8	3	-	421-074	-	421-074-4
		1	1/8	3	415-006	421-006	415-006-4	421-006-4
5/32	D1	9/16	5/32	2	414-004	420-004	414-004-4	420-004-4
		5/16	3/16	2	-	422-008	-	422-008-4
		9/16	3/16	2	-	420-038	-	420-038-4
3/16	D1	5/16	3/16	2	-	422-010	-	422-010-4
		3/8	3/16	2	-	422-012	-	422-012-4
		3/4	3/16	2	414-006	420-006	414-006-4	420-006-4
		5/8	3/16	2-1/2	-	421-076	-	421-076-4



SQUARE END AXMILLS



2 and 3 Flutes • Coated and Uncoated

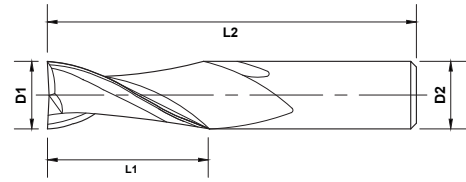

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality


Length Key (K)




Quick Ship Items

K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute
Standard	3/16	3/4	3/16	2-1/2	415-008	421-008	415-008-4	421-008-4
		1	3/16	2-1/2	-	421-078	-	421-078-4
		5/16	3/16	3	-	421-080	-	421-080-4
		1-1/8	3/16	3	415-010	421-010	415-010-4	421-010-4
		1	3/16	4	415-012	421-012	415-012-4	421-012-4
Stub	7/32	3/8	1/4	2-1/2	-	422-014	-	422-014-4
		3/4	1/4	2-1/2	-	420-040	-	420-040-4
Long	1/4	3/8	1/4	2-1/2	-	422-016	-	422-016-4
		1/2	1/4	2-1/2	-	422-018	-	422-018-4
		5/8	1/4	2-1/2	-	420-042	-	420-042-4
		3/4	1/4	2-1/2	414-008	420-008	414-008-4	420-008-4
		1	1/4	2-1/2	414-010	420-010	414-010-4	420-010-4
		1-1/8	1/4	2-1/2	-	421-082	-	421-082-4
		1-1/8	1/4	3	415-014	421-014	415-014-4	421-014-4
		1-1/4	1/4	3	-	421-084	-	421-084-4
		1-1/2	1/4	3	-	421-086	-	421-086-4
		3/8	1/4	4	-	421-088	-	421-088-4
		3/4	1/4	4	-	421-090	-	421-090-4
		1	1/4	4	415-016	421-016	415-016-4	421-016-4
		1-1/2	1/4	4	415-018	421-018	415-018-4	421-018-4
		2	1/4	4	-	421-092	-	421-092-4
1-1/2	1/4	6	415-020	421-020	415-020-4	421-020-4		
Stub	9/32	7/16	5/16	2-1/2	-	422-020	-	422-020-4
		13/16	5/16	2-1/2	-	420-044	-	420-044-4
Long	5/16	7/16	5/16	2-1/2	-	422-022	-	422-022-4
		1/2	5/16	2-1/2	-	422-024	-	422-024-4
		3/4	5/16	2-1/2	414-012	420-012	414-012-4	420-012-4
		13/16	5/16	2-1/2	-	420-046	-	420-046-4
		1-1/8	5/16	2-1/2	-	421-094	-	421-094-4
		1	5/16	3	414-014	420-014	414-014-4	420-014-4
		1-1/8	5/16	3	415-022	421-022	415-022-4	421-022-4
		1-1/4	5/16	3-1/2	-	421-096	-	421-096-4
		1-1/2	5/16	3-1/2	-	421-098	-	421-098-4
7/16	5/16	4	-	421-100	-	421-100-4		

SQUARE END AXMILLS



2 and 3 Flutes • Coated and Uncoated

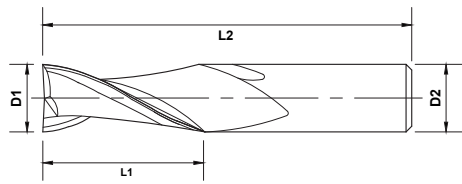

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

Length Key (K)




High Performance

Quick Ship Items


K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute
Standard	5/16	13/16	5/16	4	-	421-102	-	421-102-4
		1	5/16	4	415-024	421-024	415-024-4	421-024-4
		1-5/8	5/16	4	415-026	421-026	415-026-4	421-026-4
		2-1/8	5/16	4	-	421-104	-	421-104-4
		1-1/2	5/16	6	415-028	421-028	415-028-4	421-028-4
Stub	11/32	1/2	3/8	2-1/2	-	422-026	-	422-026-4
		1	3/8	2-1/2	-	420-048	-	420-048-4
Long	3/8	1/2	3/8	2-1/2	-	422-028	-	422-028-4
		5/8	3/8	2-1/2	-	422-030	-	422-030-4
		3/4	3/8	2-1/2	-	420-050	-	420-050-4
		7/8	3/8	2-1/2	414-016	420-016	414-016-4	420-016-4
		1	3/8	2-1/2	414-018	420-018	414-018-4	420-018-4
		1-1/8	3/8	3	415-030	421-030	415-030-4	421-030-4
		1-1/4	3/8	3	-	421-106	-	421-106-4
		1/2	3/8	4	-	421-108	-	421-108-4
		1	3/8	4	-	421-110	-	421-110-4
		1-1/2	3/8	4	-	421-112	-	421-112-4
		1-3/4	3/8	4	415-032	421-032	415-032-4	421-032-4
		2	3/8	4	415-034	421-034	415-034-4	421-034-4
		1-1/2	3/8	6	415-036	421-036	415-036-4	421-036-4
2-1/2	3/8	6	-	421-114	-	421-114-4		
3	3/8	6	415-038	421-038	415-038-4	421-038-4		
Stub	13/32	9/16	7/16	2-3/4	-	422-032	-	422-032-4
		1	7/16	2-3/4	-	420-052	-	420-052-4
Long	7/16	1	7/16	2-1/2	414-020	420-020	414-020-4	420-020-4
		9/16	7/16	2-3/4	-	422-034	-	422-034-4
		1	7/16	2-3/4	-	420-054	-	420-054-4
		1	7/16	4	415-040	421-040	415-040-4	421-040-4
		2	7/16	4	415-042	421-042	415-042-4	421-042-4
		1-1/2	7/16	6	415-044	421-044	415-044-4	421-044-4
		3	7/16	6	415-046	421-046	415-046-4	421-046-4

SQUARE END AXMILLS



2 and 3 Flutes • Coated and Uncoated

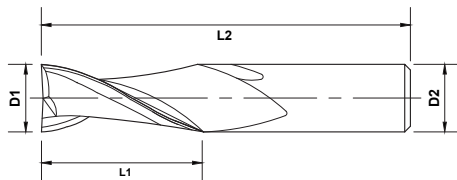- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Length Key (K)




Quick Ship Items




K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute
Standard	15/32	5/8	1/2	3	-	422-036	-	422-036-4
		1-1/4	1/2	3	-	420-056	-	420-056-4
Stub	1/2	5/8	1/2	3	-	422-038	-	422-038-4
		3/4	1/2	3	-	420-058	-	420-058-4
		1	1/2	3	414-022	420-022	414-022-4	420-022-4
		1-1/4	1/2	3	414-024	420-024	414-024-4	420-024-4
		5/8	1/2	4	-	421-116	-	421-116-4
		1-1/2	1/2	4	-	421-118	-	421-118-4
		2	1/2	4	415-052	421-052	415-052-4	421-052-4
		1	1/2	4	415-048	421-048	415-048-4	421-048-4
		5/8	1/2	6	-	421-120	-	421-120-4
		1-1/4	1/2	6	-	421-122	-	421-122-4
		1-1/2	1/2	6	415-050	421-050	415-050-4	421-050-4
		2-1/4	1/2	6	-	421-124	-	421-124-4
		2-1/2	1/2	6	-	421-126	-	421-126-4
		3	1/2	6	415-054	421-054	415-054-4	421-054-4
		3-1/4	1/2	6	-	421-128	-	421-128-4
		4	1/2	8	-	421-130	-	421-130-4
Long	9/16	1-1/4	9/16	3	414-026	420-026	414-026-4	420-026-4
		3/4	5/8	3-1/2	-	422-040	-	422-040-4
	5/8	1-1/4	5/8	3-1/2	414-028	420-028	414-028-4	420-028-4
		1-5/8	5/8	3-1/2	414-030	420-030	414-030-4	420-030-4
		3/4	5/8	5	-	422-042	-	422-042-4
		2	5/8	5	-	421-132	-	421-132-4
		2-1/4	5/8	5	415-056	421-056	415-056-4	421-056-4
		2-1/2	5/8	5	-	421-134	-	421-134-4
		2-3/4	5/8	5	-	421-136	-	421-136-4
		3/4	5/8	6	-	421-138	-	421-138-4
		1-5/8	5/8	6	-	421-140	-	421-140-4
		3	5/8	6	415-058	421-058	415-058-4	421-058-4
		3-1/4	5/8	6	-	421-142	-	421-142-4
		4	5/8	8	-	421-144	-	421-144-4

SQUARE END AXMILLS



2 and 3 Flutes • Coated and Uncoated

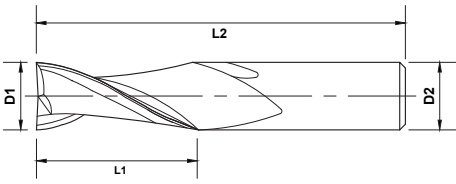

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

High Performance

Length Key (K)

Standard
 Stub
 Long




Quick Ship Items

K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute
3/4	3/4	1	3/4	4	-	420-060	-	420-060-4
		1-1/2	3/4	4	414-032	420-032	414-032-4	420-032-4
		1-5/8	3/4	4	-	420-062	-	420-062-4
		1-3/4	3/4	4	414-034	420-034	414-034-4	420-034-4
		1	3/4	5	-	421-146	-	421-146-4
		2	3/4	5	-	421-148	-	421-148-4
		2-1/4	3/4	5	415-060	421-060	415-060-4	421-060-4
		2-1/2	3/4	5	-	421-150	-	421-150-4
		1	3/4	6	-	421-152	-	421-152-4
		1-5/8	3/4	6	-	421-154	-	421-154-4
		3	3/4	6	415-062	421-062	415-062-4	421-062-4
		3-1/4	3/4	6	-	421-156	-	421-156-4
		3-1/2	3/4	6	-	421-158	-	421-158-4
		4	3/4	7	-	421-160	-	421-160-4
		5	3/4	8	-	421-162	-	421-162-4
1	1	1-1/2	1	4	414-036	420-036	414-036-4	420-036-4
		1-1/4	1	5	-	421-164	-	421-164-4
		1-1/2	1	5	-	421-166	-	421-166-4
		2	1	5	-	421-168	-	421-168-4
		2-1/2	1	5	-	421-170	-	421-170-4
		1-1/4	1	6	-	421-172	-	421-172-4
		2	1	6	415-064	421-064	415-064-4	421-064-4
		3	1	6	415-068	421-068	415-068-4	421-068-4
		3-1/2	1	6	-	421-174	-	421-174-4
		4	1	6	415-066	421-066	415-066-4	421-066-4
		1-1/4	1	7	-	421-176	-	421-176-4
		2	1	7	-	421-178	-	421-178-4
		4-1/8	1	7	-	421-180	-	421-180-4
5-1/2	1	8	-	421-182	-	421-182-4		
1-1/4	1-1/4	1-1/4	1-1/4	4-1/2	-	420-064	-	420-064-4
		2	1-1/4	4-1/2	-	421-184	-	421-184-4
		3-1/4	1-1/4	6	-	421-186	-	421-186-4
		5	1-1/4	7-1/2	-	421-188	-	421-188-4





BALL END AXMILLS



2 and 3 Flutes • Coated and Uncoated

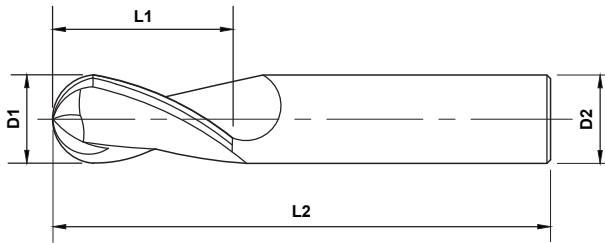- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



- Stub, Series 422
- Standard, Series 414, 420
- Long, Series 415, 421



- Stub, Series 422, PowerZ
- Standard, Series 414, 420, PowerZ
- Long, Series 415, 421, PowerZ


Length Key (K)

Standard Stub Long


Non-Ferrous
N

K	OD D1	LOC L1	SHK D2	OAL L2	Uncoated		PowerZ	
					2 Flute	3 Flute	2 Flute	3 Flute
1/8	1/8	1/2	1/8	1-1/2	414-202	420-202	414-202-4	420-202-4
		5/8	1/8	2	415-202	421-202	415-202-4	421-202-4
		3/4	1/8	2	415-204	421-204	415-204-4	421-204-4
		1	1/8	3	415-206	421-206	415-206-4	421-206-4
5/32	5/32	9/16	5/32	2	414-204	420-204	414-204-4	420-204-4
		3/4	3/16	2	414-206	420-206	414-206-4	420-206-4
3/16	3/16	3/4	3/16	2-1/2	415-208	421-208	415-208-4	421-208-4
		1-1/8	3/16	3	415-210	421-210	415-210-4	421-210-4
		1	3/16	4	415-212	421-212	415-212-4	421-212-4
		3/8	1/4	2-1/2	-	422-216	-	422-216-4
1/4	1/4	3/4	1/4	2-1/2	414-208	420-208	414-208-4	420-208-4
		1	1/4	2-1/2	414-210	420-210	414-210-4	420-210-4
		1-1/8	1/4	3	415-214	421-214	415-214-4	421-214-4
		1-1/4	1/4	3	-	421-284	-	421-284-4
		3/8	1/4	4	-	421-288	-	421-288-4
		1	1/4	4	415-216	421-216	415-216-4	421-216-4
		1-1/2	1/4	4	415-218	421-218	415-218-4	421-218-4
		1-1/2	1/4	6	415-220	421-220	415-220-4	421-220-4

BALL END AXMILLS



2 and 3 Flutes • Coated and Uncoated

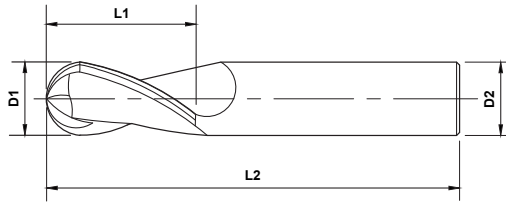

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

High Performance


Length Key (K)

Standard Stub Long




K	OD D1	LOC L1	SHK D2	OAL L2	Uncoated		PowerZ	
					2 Flute	3 Flute	2 Flute	3 Flute
5/16	5/16	7/16	5/16	2-1/2		422-222		422-222-4
		3/4	5/16	2-1/2	414-212	420-212	414-212-4	420-212-4
		13/16	5/16	2-1/2		420-246		420-246-4
		1	5/16	3	414-214	420-214	414-214-4	420-214-4
		1-1/8	5/16	3	415-222	421-222	415-222-4	421-222-4
		1-1/4	5/16	3-1/2		421-296		421-296-4
		7/16	5/16	4		421-300		421-300-4
		1	5/16	4	415-224	421-224	415-224-4	421-224-4
		1-5/8	5/16	4	415-226	421-226	415-226-4	421-226-4
3/8	3/8	1-1/2	5/16	6	415-228	421-228	415-228-4	421-228-4
		1/2	3/8	2-1/2		422-228		422-228-4
		7/8	3/8	2-1/2	414-216	420-216	414-216-4	420-216-4
		1	3/8	2-1/2	414-218	420-218	414-218-4	420-218-4
		1-1/8	3/8	3	415-230	421-230	415-230-4	421-230-4
		1/2	3/8	4		421-308		421-308-4
		1-1/2	3/8	4		421-312		421-312-4
		1-3/4	3/8	4	415-232	421-232	415-232-4	421-232-4
		2	3/8	4	415-234	421-234	415-234-4	421-234-4
7/16	7/16	1-1/2	3/8	6	415-236	421-236	415-236-4	421-236-4
		3	3/8	6	415-238	421-238	415-238-4	421-238-4
		1	7/16	2-1/2	414-220	420-220	414-220-4	420-220-4
		9/16	7/16	2-3/4		422-234		422-234-4
		1	7/16	2-3/4		420-254		420-254-4
		1	7/16	4	415-240	421-240	415-240-4	421-240-4
		2	7/16	4	415-242	421-242	415-242-4	421-242-4
1-1/2	7/16	6	415-244	421-244	415-244-4	421-244-4		
3	7/16	6	415-246	421-246	415-246-4	421-246-4		

BALL END AXMILLS



2 and 3 Flutes • Coated and Uncoated

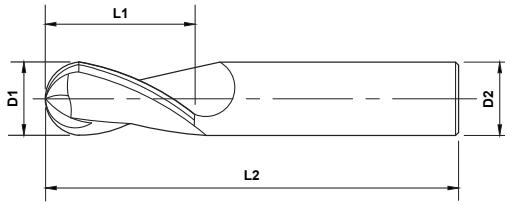- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality




Length Key (K)

Standard Stub Long

Non-Ferrous
N


K	OD	LOC	SHK	OAL	Uncoated		PowerZ			
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute		
1/2	1/2	5/8	1/2	3		422-238		422-238-4		
		1	1/2	3	414-222	420-222	414-222-4	420-222-4		
		1-1/4	1/2	3	414-224	420-224	414-224-4	420-224-4		
		5/8	1/2	4		421-316		421-316-4		
		1	1/2	4	415-248	421-248	415-248-4	421-248-4		
		2	1/2	4	415-252	421-252	415-252-4	421-252-4		
		5/8	1/2	6		421-320		421-320-4		
		1-1/2	1/2	6	415-250	421-250	415-250-4	421-250-4		
	9/16	9/16	3	1/2	6	415-254	421-254	415-254-4	421-254-4	
			1-1/4	9/16	3	414-226	420-226	414-226-4	420-226-4	
			5/8	3/4	5/8	3-1/2		422-240		422-240-4
				1-1/4	5/8	3-1/2	414-228	420-228	414-228-4	420-228-4
				1-5/8	5/8	3-1/2	414-230	420-230	414-230-4	420-230-4
				3/4	5/8	5		422-242		422-242-4
				2-1/4	5/8	5	415-256	421-256	415-256-4	421-256-4
				2-1/2	5/8	5		421-334		421-334-4
3/4	5/8	6			421-338		421-338-4			
3	5/8	6	415-258	421-258	415-258-4	421-258-4				
3/4	3/4	1	3/4	4		420-260		420-260-4		
		1-1/2	3/4	4	414-232	420-232	414-232-4	420-232-4		
		1-5/8	3/4	4		420-262		420-262-4		
		1-3/4	3/4	4	414-234	420-234	414-234-4	420-234-4		
		1	3/4	5		421-346		421-346-4		
		2-1/4	3/4	5	415-260	421-260	415-260-4	421-260-4		
		1	3/4	6		421-352		421-352-4		
		3	3/4	6	415-262	421-262	415-262-4	421-262-4		
		3-1/4	3/4	6		421-356		421-356-4		
1	1	1-1/2	1	4	414-236	420-236	414-236-4	420-236-4		
		1-1/4	1	5		421-364		421-364-4		
		2	1	5		421-368		421-368-4		
		1-1/4	1	6		421-372		421-372-4		
		2	1	6	415-264	421-264	415-264-4	421-264-4		
		3	1	6	415-268	421-268	415-268-4	421-268-4		
		3-1/2	1	6		421-374		421-374-4		
		4	1	6	415-266	421-266	415-266-4	421-266-4		
1-1/4	1	7		421-376		421-376-4				

CORNER RADIUS AXMILLS




2 and 3 Flutes • Coated and Uncoated

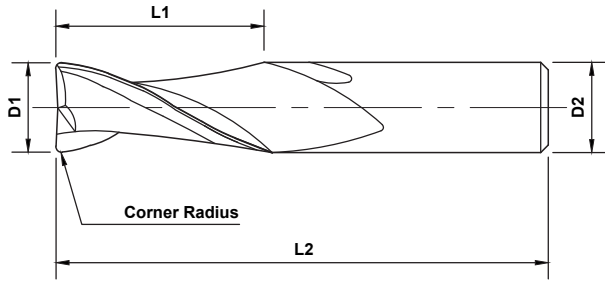- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



High Performance



- Stub, Series 422
- Standard, Series 414, 420
- Long, Series 415, 421



- Stub, Series 422, PowerZ
- Standard, Series 414, 420, PowerZ
- Long, Series 415, 421, PowerZ


Length Key (K)

Standard Stub Long

Non-Ferrous
N


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ		
						2 Flute	3 Flute	2 Flute	3 Flute	
1/8	D1	1/2	1/8	1-1/2	.015	414-401	420-401	414-401-4	420-401-4	
		1/2	1/8	1-1/2	.020	414-402	420-402	414-402-4	420-402-4	
		1/2	1/8	1-1/2	.030	414-403	420-403	414-403-4	420-403-4	
		1/2	1/8	1-1/2	.040	414-404	420-404	414-404-4	420-404-4	
	5/8	1/8	5/8	1/8	2	.015	415-401	421-401	415-401-4	421-401-4
			5/8	1/8	2	.020	415-402	421-402	415-402-4	421-402-4
			5/8	1/8	2	.030	415-403	421-403	415-403-4	421-403-4
			5/8	1/8	2	.040	415-404	421-404	415-404-4	421-404-4
		3/4	3/4	1/8	2	.015	415-411	421-411	415-411-4	421-411-4
			3/4	1/8	2	.020	415-412	421-412	415-412-4	421-412-4
			3/4	1/8	2	.030	415-413	421-413	415-413-4	421-413-4
			3/4	1/8	2	.040	415-414	421-414	415-414-4	421-414-4
	1	1	1/8	3	.015	415-421	421-421	415-421-4	421-421-4	
		1	1/8	3	.020	415-422	421-422	415-422-4	421-422-4	
		1	1/8	3	.030	415-423	421-423	415-423-4	421-423-4	
		1	1/8	3	.040	415-424	421-424	415-424-4	421-424-4	
5/32	9/16	5/32	2	.015	414-411	420-411	414-411-4	420-411-4		
		5/32	2	.020	414-412	420-412	414-412-4	420-412-4		
		5/32	2	.030	414-413	420-413	414-413-4	420-413-4		
		5/32	2	.040	414-414	420-414	414-414-4	420-414-4		

CORNER RADIUS AXMILLS



2 and 3 Flutes • Coated and Uncoated

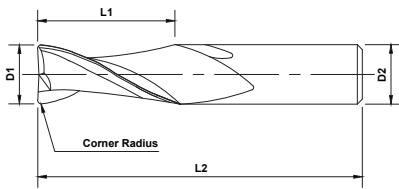- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Length Key (K)

Standard Stub Long

Non-Ferrous
N

	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ	
K	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute
3/16		3/4	3/16	2-1/2	.015	415-431	421-431	415-431-4	421-431-4
		3/4	3/16	2-1/2	.020	415-432	421-432	415-432-4	421-432-4
		3/4	3/16	2-1/2	.030	415-433	421-433	415-433-4	421-433-4
		3/4	3/16	2-1/2	.040	415-434	421-434	415-434-4	421-434-4
		3/4	3/16	2	.015	414-421	420-421	414-421-4	420-421-4
		3/4	3/16	2	.020	414-422	420-422	414-422-4	420-422-4
		3/4	3/16	2	.030	414-423	420-423	414-423-4	420-423-4
		3/4	3/16	2	.040	414-424	420-424	414-424-4	420-424-4
		1-1/8	3/16	3	.015	415-441	421-441	415-441-4	421-441-4
		1-1/8	3/16	3	.020	415-442	421-442	415-442-4	421-442-4
		1-1/8	3/16	3	.030	415-443	421-443	415-443-4	421-443-4
		1-1/8	3/16	3	.040	415-444	421-444	415-444-4	421-444-4
		1	3/16	4	.015	415-451	421-451	415-451-4	421-451-4
		1	3/16	4	.020	415-452	421-452	415-452-4	421-452-4
		1	3/16	4	.030	415-453	421-453	415-453-4	421-453-4
		1	3/16	4	.040	415-454	421-454	415-454-4	421-454-4
1/4		3/8	1/4	2-1/2	.015	-	422-401	-	422-401-4
		3/8	1/4	2-1/2	.020	-	422-402	-	422-402-4
		3/8	1/4	2-1/2	.030	-	422-403	-	422-403-4
		3/4	1/4	2-1/2	.015	414-431	420-431	414-431-4	420-431-4
		3/4	1/4	2-1/2	.020	414-432	420-432	414-432-4	420-432-4
		3/4	1/4	2-1/2	.030	414-433	420-433	414-433-4	420-433-4
		3/4	1/4	2-1/2	.040	414-434	420-434	414-434-4	420-434-4
		3/4	1/4	2-1/2	.060	414-425	420-425	414-425-4	420-425-4
		1	1/4	2-1/2	.015	414-441	420-441	414-441-4	420-441-4
		1	1/4	2-1/2	.020	414-442	420-442	414-442-4	420-442-4
		1	1/4	2-1/2	.030	414-443	420-443	414-443-4	420-443-4
		1	1/4	2-1/2	.040	414-444	420-444	414-444-4	420-444-4
		1	1/4	2-1/2	.060	414-445	420-445	414-445-4	420-445-4
		1-1/8	1/4	3	.015	415-461	421-461	415-461-4	421-461-4
		1-1/8	1/4	3	.020	415-462	421-462	415-462-4	421-462-4
		1-1/8	1/4	3	.030	415-463	421-463	415-463-4	421-463-4
		1-1/8	1/4	3	.040	415-464	421-464	415-464-4	421-464-4
		1-1/8	1/4	3	.060	415-465	421-465	415-465-4	421-465-4
		1-1/2	1/4	4	.015	415-481	421-481	415-481-4	421-481-4
		1-1/2	1/4	4	.020	415-482	421-482	415-482-4	421-482-4
		1-1/2	1/4	4	.030	415-483	421-483	415-483-4	421-483-4
		1-1/2	1/4	4	.040	415-484	421-484	415-484-4	421-484-4
		1-1/2	1/4	4	.060	415-485	421-485	415-485-4	421-485-4

CORNER RADIUS AXMILLS



2 and 3 Flutes • Coated and Uncoated



- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

High Performance

Length Key (K)

Standard Stub Long

Non-Ferrous
N


K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ			
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute		
1/4		1	1/4	4	.015	415-471	421-471	415-471-4	421-471-4		
		1	1/4	4	.020	415-472	421-472	415-472-4	421-472-4		
		1	1/4	4	.030	415-473	421-473	415-473-4	421-473-4		
		1	1/4	4	.040	415-474	421-474	415-474-4	421-474-4		
		1	1/4	4	.060	415-475	421-475	415-475-4	421-475-4		
		1-1/2	1/4	6	.015	415-491	421-491	415-491-4	421-491-4		
		1-1/2	1/4	6	.020	415-492	421-492	415-492-4	421-492-4		
		1-1/2	1/4	6	.030	415-493	421-493	415-493-4	421-493-4		
		1-1/2	1/4	6	.040	415-494	421-494	415-494-4	421-494-4		
		1-1/2	1/4	6	.060	415-495	421-495	415-495-4	421-495-4		
		5/16		3/4	5/16	2-1/2	.015	414-451	420-451	414-451-4	420-451-4
				3/4	5/16	2-1/2	.020	414-452	420-452	414-452-4	420-452-4
				3/4	5/16	2-1/2	.030	414-453	420-453	414-453-4	420-453-4
				3/4	5/16	2-1/2	.040	414-454	420-454	414-454-4	420-454-4
				3/4	5/16	2-1/2	.060	414-455	420-455	414-455-4	420-455-4
				1-1/8	5/16	3	.015	415-501	421-501	415-501-4	421-501-4
1-1/8	5/16			3	.020	415-502	421-502	415-502-4	421-502-4		
1-1/8	5/16			3	.030	415-503	421-503	415-503-4	421-503-4		
1-1/8	5/16			3	.040	415-504	421-504	415-504-4	421-504-4		
1-1/8	5/16			3	.060	415-505	421-505	415-505-4	421-505-4		
1	5/16			3	.015	414-461	420-461	414-461-4	420-461-4		
1	5/16			3	.020	414-462	420-462	414-462-4	420-462-4		
1	5/16			3	.030	414-463	420-463	414-463-4	420-463-4		
1	5/16			3	.040	414-464	420-464	414-464-4	420-464-4		
1	5/16			3	.060	414-465	420-465	414-465-4	420-465-4		
1-5/8	5/16			4	.015	415-521	421-521	415-521-4	421-521-4		
1-5/8	5/16			4	.020	415-522	421-522	415-522-4	421-522-4		
1-5/8	5/16			4	.030	415-523	421-523	415-523-4	421-523-4		
1-5/8	5/16			4	.040	415-524	421-524	415-524-4	421-524-4		
1-5/8	5/16			4	.060	415-525	421-525	415-525-4	421-525-4		
1	5/16			4	.015	415-511	421-511	415-511-4	421-511-4		
1	5/16			4	.020	415-512	421-512	415-512-4	421-512-4		
1	5/16			4	.030	415-513	421-513	415-513-4	421-513-4		
1	5/16			4	.040	415-514	421-514	415-514-4	421-514-4		
1	5/16			4	.060	415-515	421-515	415-515-4	421-515-4		
1-1/2	5/16			6	.015	415-531	421-531	415-531-4	421-531-4		
1-1/2	5/16			6	.020	415-532	421-532	415-532-4	421-532-4		
1-1/2	5/16			6	.030	415-533	421-533	415-533-4	421-533-4		
1-1/2	5/16			6	.040	415-534	421-534	415-534-4	421-534-4		
1-1/2	5/16			6	.060	415-535	421-535	415-535-4	421-535-4		

CORNER RADIUS AXMILLS



2 and 3 Flutes • Coated and Uncoated

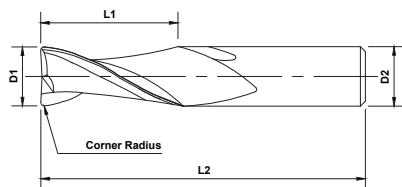- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Length Key (K)

Standard Stub Long

Non-Ferrous
N


Quick Ship Items

K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ	
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute
3/8		1/2	3/8	2-1/2	.020	-	422-412	-	422-412-4
		1/2	3/8	2-1/2	.030	-	422-413	-	422-413-4
		1/2	3/8	2-1/2	.040	-	422-414	-	422-414-4
		7/8	3/8	2-1/2	.010	414-471	420-471	414-471-4	420-471-4
		7/8	3/8	2-1/2	.020	414-472	420-472	414-472-4	420-472-4
		7/8	3/8	2-1/2	.030	414-473	420-473	414-473-4	420-473-4
		7/8	3/8	2-1/2	.040	414-474	420-474	414-474-4	420-474-4
		7/8	3/8	2-1/2	.060	414-475	420-475	414-475-4	420-475-4
		1	3/8	2-1/2	.015	414-481	420-481	414-481-4	420-481-4
		1	3/8	2-1/2	.020	414-482	420-482	414-482-4	420-482-4
		1	3/8	2-1/2	.030	414-483	420-483	414-483-4	420-483-4
		1	3/8	2-1/2	.040	414-484	420-484	414-484-4	420-484-4
		1	3/8	2-1/2	.060	414-485	420-485	414-485-4	420-485-4
		1-1/8	3/8	3	.015	415-541	421-541	415-541-4	421-541-4
		1-1/8	3/8	3	.020	415-542	421-542	415-542-4	421-542-4
		1-1/8	3/8	3	.030	415-543	421-543	415-543-4	421-543-4
		1-1/8	3/8	3	.040	415-544	421-544	415-544-4	421-544-4
		1-1/8	3/8	3	.060	415-545	421-545	415-545-4	421-545-4
		1-3/4	3/8	4	.015	415-551	421-551	415-551-4	421-551-4
		1-3/4	3/8	4	.020	415-552	421-552	415-552-4	421-552-4
		1-3/4	3/8	4	.030	415-553	421-553	415-553-4	421-553-4
		1-3/4	3/8	4	.040	415-554	421-554	415-554-4	421-554-4
		1-3/4	3/8	4	.060	415-555	421-555	415-555-4	421-555-4
		2	3/8	4	.015	415-561	421-561	415-561-4	421-561-4
		2	3/8	4	.020	415-562	421-562	415-562-4	421-562-4
		2	3/8	4	.030	415-563	421-563	415-563-4	421-563-4
		2	3/8	4	.040	415-564	421-564	415-564-4	421-564-4
		2	3/8	4	.060	415-565	421-565	415-565-4	421-565-4
		1-1/2	3/8	6	.015	415-571	421-571	415-571-4	421-571-4
		1-1/2	3/8	6	.020	415-572	421-572	415-572-4	421-572-4
1-1/2	3/8	6	.030	415-573	421-573	415-573-4	421-573-4		
1-1/2	3/8	6	.040	415-574	421-574	415-574-4	421-574-4		
1-1/2	3/8	6	.060	415-575	421-575	415-575-4	421-575-4		
3	3/8	6	.015	415-581	421-581	415-581-4	421-581-4		
3	3/8	6	.020	415-582	421-582	415-582-4	421-582-4		
3	3/8	6	.030	415-583	421-583	415-583-4	421-583-4		
3	3/8	6	.040	415-584	421-584	415-584-4	421-584-4		
3	3/8	6	.060	415-585	421-585	415-585-4	421-585-4		

CORNER RADIUS AXMILLS



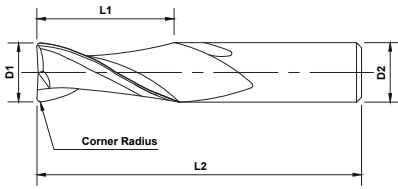2 and 3 Flutes • Coated and Uncoated



- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

High Performance

Length Key (K)

Standard Stub Long

Quick Ship Items


Non-Ferrous
N

K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ	
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute
7/16		1	7/16	2-1/2	.015	414-491	420-491	414-491-4	420-491-4
		1	7/16	2-1/2	.020	414-492	420-492	414-492-4	420-492-4
		1	7/16	2-1/2	.030	414-493	420-493	414-493-4	420-493-4
		1	7/16	2-1/2	.040	414-494	420-494	414-494-4	420-494-4
		1	7/16	2-1/2	.060	414-495	420-495	414-495-4	420-495-4
		1	7/16	4	.015	415-591	421-591	415-591-4	421-591-4
		1	7/16	4	.020	415-592	421-592	415-592-4	421-592-4
		1	7/16	4	.030	415-593	421-593	415-593-4	421-593-4
		1	7/16	4	.040	415-594	421-594	415-594-4	421-594-4
		1	7/16	4	.060	415-595	421-595	415-595-4	421-595-4
		2	7/16	4	.015	415-601	421-601	415-601-4	421-601-4
		2	7/16	4	.020	415-602	421-602	415-602-4	421-602-4
		2	7/16	4	.030	415-603	421-603	415-603-4	421-603-4
		2	7/16	4	.040	415-604	421-604	415-604-4	421-604-4
		2	7/16	4	.060	415-605	421-605	415-605-4	421-605-4
		1-1/2	7/16	6	.015	415-611	421-611	415-611-4	421-611-4
		1-1/2	7/16	6	.020	415-612	421-612	415-612-4	421-612-4
		1-1/2	7/16	6	.030	415-613	421-613	415-613-4	421-613-4
		1-1/2	7/16	6	.040	415-614	421-614	415-614-4	421-614-4
		1-1/2	7/16	6	.060	415-615	421-615	415-615-4	421-615-4
1/2		3	7/16	6	.015	415-621	421-621	415-621-4	421-621-4
		3	7/16	6	.020	415-622	421-622	415-622-4	421-622-4
		3	7/16	6	.030	415-623	421-623	415-623-4	421-623-4
		3	7/16	6	.040	415-624	421-624	415-624-4	421-624-4
		3	7/16	6	.060	415-625	421-625	415-625-4	421-625-4
		5/8	1/2	3	.020	-	422-422	-	422-422-4
		5/8	1/2	3	.030	-	422-423	-	422-423-4
		5/8	1/2	3	.060	-	422-425	-	422-425-4
		5/8	1/2	3	.090	-	422-426	-	422-426-4
		1-1/4	1/2	3	.015	414-511	420-511	414-511-4	420-511-4
		1-1/4	1/2	3	.020	414-512	420-512	414-512-4	420-512-4
		1-1/4	1/2	3	.030	414-513	420-513	414-513-4	420-513-4
		1-1/4	1/2	3	.040	414-514	420-514	414-514-4	420-514-4
		1-1/4	1/2	3	.060	414-515	420-515	414-515-4	420-515-4
		1-1/4	1/2	3	.090	414-516	420-516	414-516-4	420-516-4
		1-1/4	1/2	3	.120	414-517	420-517	414-517-4	420-517-4
		1	1/2	3	.015	414-501	420-501	414-501-4	420-501-4
		1	1/2	3	.020	414-502	420-502	414-502-4	420-502-4

CORNER RADIUS AXMILLS



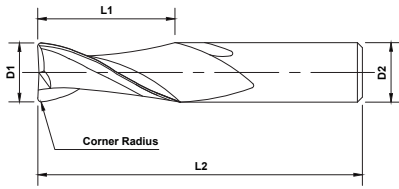2 and 3 Flutes • Coated and Uncoated



- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

Length Key (K)

Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ			
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute		
1/2		1	1/2	3	.030	414-503	420-503	414-503-4	420-503-4		
		1	1/2	3	.040	414-504	420-504	414-504-4	420-504-4		
		1	1/2	3	.060	414-505	420-505	414-505-4	420-505-4		
		1	1/2	3	.090	414-506	420-506	414-506-4	420-506-4		
		1	1/2	3	.120	414-507	420-507	414-507-4	420-507-4		
		1	1/2	4	.015	415-631	421-631	415-631-4	421-631-4		
		1	1/2	4	.020	415-632	421-632	415-632-4	421-632-4		
		1	1/2	4	.030	415-633	421-633	415-633-4	421-633-4		
		1	1/2	4	.040	415-634	421-634	415-634-4	421-634-4		
		1	1/2	4	.060	415-635	421-635	415-635-4	421-635-4		
		1	1/2	4	.090	415-636	421-636	415-636-4	421-636-4		
		1	1/2	4	.120	415-637	421-637	415-637-4	421-637-4		
		2	1/2	4	.015	415-651	421-651	415-651-4	421-651-4		
		2	1/2	4	.020	415-652	421-652	415-652-4	421-652-4		
		2	1/2	4	.030	415-653	421-653	415-653-4	421-653-4		
		2	1/2	4	.040	415-654	421-654	415-654-4	421-654-4		
		2	1/2	4	.060	415-655	421-655	415-655-4	421-655-4		
		2	1/2	4	.090	415-656	421-656	415-656-4	421-656-4		
		2	1/2	4	.120	415-657	421-657	415-657-4	421-657-4		
		1-1/2	1/2	6	.015	415-641	421-641	415-641-4	421-641-4		
		1-1/2	1/2	6	.020	415-642	421-642	415-642-4	421-642-4		
		1-1/2	1/2	6	.030	415-643	421-643	415-643-4	421-643-4		
		1-1/2	1/2	6	.040	415-644	421-644	415-644-4	421-644-4		
		1-1/2	1/2	6	.060	415-645	421-645	415-645-4	421-645-4		
		1-1/2	1/2	6	.090	415-646	421-646	415-646-4	421-646-4		
		1-1/2	1/2	6	.120	415-647	421-647	415-647-4	421-647-4		
		3	1/2	6	.015	415-661	421-661	415-661-4	421-661-4		
		3	1/2	6	.020	415-662	421-662	415-662-4	421-662-4		
		3	1/2	6	.030	415-663	421-663	415-663-4	421-663-4		
		3	1/2	6	.040	415-664	421-664	415-664-4	421-664-4		
		3	1/2	6	.060	415-665	421-665	415-665-4	421-665-4		
		3	1/2	6	.090	415-666	421-666	415-666-4	421-666-4		
		3	1/2	6	.120	415-667	421-667	415-667-4	421-667-4		
		9/16		1-1/4	9/16	3	.015	414-521	420-521	414-521-4	420-521-4
				1-1/4	9/16	3	.020	414-522	420-522	414-522-4	420-522-4
				1-1/4	9/16	3	.030	414-523	420-523	414-523-4	420-523-4
1-1/4	9/16			3	.040	414-524	420-524	414-524-4	420-524-4		
1-1/4	9/16			3	.060	414-525	420-525	414-525-4	420-525-4		
1-1/4	9/16			3	.090	414-526	420-526	414-526-4	420-526-4		
1-1/4	9/16			3	.120	414-527	420-527	414-527-4	420-527-4		

CORNER RADIUS AXMILLS



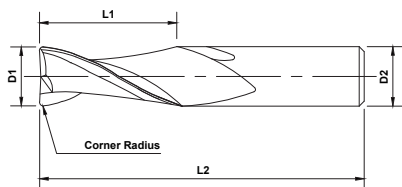2 and 3 Flutes • Coated and Uncoated



- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

High Performance

Length Key (K)

Standard
 Stub
 Long

Quick Ship Items



K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ	
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute
5/8	5/8	1-1/4	5/8	3-1/2	.015	414-531	420-531	414-531-4	420-531-4
		1-1/4	5/8	3-1/2	.020	414-532	420-532	414-532-4	420-532-4
		1-1/4	5/8	3-1/2	.030	414-533	420-533	414-533-4	420-533-4
		1-1/4	5/8	3-1/2	.040	414-534	420-534	414-534-4	420-534-4
		1-1/4	5/8	3-1/2	.060	414-535	420-535	414-535-4	420-535-4
		1-1/4	5/8	3-1/2	.090	414-536	420-536	414-536-4	420-536-4
		1-1/4	5/8	3-1/2	.120	414-537	420-537	414-537-4	420-537-4
		1-5/8	5/8	3-1/2	.015	414-541	420-541	414-541-4	420-541-4
		1-5/8	5/8	3-1/2	.020	414-542	420-542	414-542-4	420-542-4
		1-5/8	5/8	3-1/2	.030	414-543	420-543	414-543-4	420-543-4
		1-5/8	5/8	3-1/2	.040	414-544	420-544	414-544-4	420-544-4
		1-5/8	5/8	3-1/2	.060	414-545	420-545	414-545-4	420-545-4
		1-5/8	5/8	3-1/2	.090	414-546	420-546	414-546-4	420-546-4
		1-5/8	5/8	3-1/2	.120	414-547	420-547	414-547-4	420-547-4
5/8	5/8	2-1/4	5/8	5	.015	415-671	421-671	415-671-4	421-671-4
		2-1/4	5/8	5	.020	415-672	421-672	415-672-4	421-672-4
		2-1/4	5/8	5	.030	415-673	421-673	415-673-4	421-673-4
		2-1/4	5/8	5	.040	415-674	421-674	415-674-4	421-674-4
		2-1/4	5/8	5	.060	415-675	421-675	415-675-4	421-675-4
		2-1/4	5/8	5	.090	415-676	421-676	415-676-4	421-676-4
		2-1/4	5/8	5	.120	415-677	421-677	415-677-4	421-677-4
		3	5/8	6	.015	415-681	421-681	415-681-4	421-681-4
		3	5/8	6	.020	415-682	421-682	415-682-4	421-682-4
		3	5/8	6	.030	415-683	421-683	415-683-4	421-683-4
		3	5/8	6	.040	415-684	421-684	415-684-4	421-684-4
		3	5/8	6	.060	415-685	421-685	415-685-4	421-685-4
		3	5/8	6	.090	415-686	421-686	415-686-4	421-686-4
		3	5/8	6	.120	415-687	421-687	415-687-4	421-687-4
3/4	3/4	1-1/2	3/4	4	.015	414-561	420-561	414-561-4	420-561-4
		1-1/2	3/4	4	.020	414-562	420-562	414-562-4	420-562-4
		1-1/2	3/4	4	.030	414-563	420-563	414-563-4	420-563-4
		1-1/2	3/4	4	.040	414-564	420-564	414-564-4	420-564-4
		1-1/2	3/4	4	.060	414-565	420-565	414-565-4	420-565-4
		1-1/2	3/4	4	.090	414-566	420-566	414-566-4	420-566-4
		1-1/2	3/4	4	.120	414-567	420-567	414-567-4	420-567-4
		1-5/8	3/4	4	.015	414-571	420-571	414-571-4	420-571-4
		1-5/8	3/4	4	.020	414-572	420-572	414-572-4	420-572-4
		1-5/8	3/4	4	.030	414-573	420-573	414-573-4	420-573-4
		1-5/8	3/4	4	.040	414-574	420-574	414-574-4	420-574-4

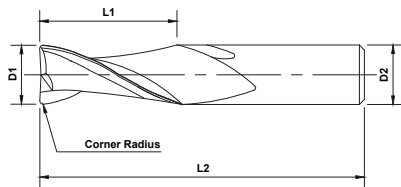


CORNER RADIUS AXMILLS



2 and 3 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Length Key (K)




Quick Ship Items



K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ		
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute	
Standard	3/4	1-5/8	3/4	4	.060	414-575	420-575	414-575-4	420-575-4	
		1-5/8	3/4	4	.090	414-576	420-576	414-576-4	420-576-4	
		1-5/8	3/4	4	.120	414-577	420-577	414-577-4	420-577-4	
		1-3/4	3/4	4	.015	414-581	420-581	414-581-4	420-581-4	
		1-3/4	3/4	4	.020	414-582	420-582	414-582-4	420-582-4	
		1-3/4	3/4	4	.030	414-583	420-583	414-583-4	420-583-4	
		1-3/4	3/4	4	.040	414-584	420-584	414-584-4	420-584-4	
		1-3/4	3/4	4	.060	414-585	420-585	414-585-4	420-585-4	
		1-3/4	3/4	4	.090	414-586	420-586	414-586-4	420-586-4	
		1-3/4	3/4	4	.120	414-587	420-587	414-587-4	420-587-4	
	1	3/4	4	.015	414-551	420-551	414-551-4	420-551-4		
	1	3/4	4	.020	414-552	420-552	414-552-4	420-552-4		
	1	3/4	4	.030	414-553	420-553	414-553-4	420-553-4		
	1	3/4	4	.040	414-554	420-554	414-554-4	420-554-4		
	1	3/4	4	.060	414-555	420-555	414-555-4	420-555-4		
	1	3/4	4	.090	414-556	420-556	414-556-4	420-556-4		
	1	3/4	4	.120	414-557	420-557	414-557-4	420-557-4		
	Long	3/4	2-1/4	3/4	5	.015	415-691	421-691	415-691-4	421-691-4
			2-1/4	3/4	5	.020	415-692	421-692	415-692-4	421-692-4
			2-1/4	3/4	5	.030	415-693	421-693	415-693-4	421-693-4
2-1/4			3/4	5	.040	415-694	421-694	415-694-4	421-694-4	
2-1/4			3/4	5	.060	415-695	421-695	415-695-4	421-695-4	
2-1/4			3/4	5	.090	415-696	421-696	415-696-4	421-696-4	
2-1/4			3/4	5	.120	415-697	421-697	415-697-4	421-697-4	
3			3/4	6	.010	415-702	421-702	415-702-4	421-702-4	
3			3/4	6	.015	415-701	421-701	415-701-4	421-701-4	
3			3/4	6	.030	415-703	421-703	415-703-4	421-703-4	
3	3/4	6	.040	415-704	421-704	415-704-4	421-704-4			
3	3/4	6	.060	415-705	421-705	415-705-4	421-705-4			
3	3/4	6	.090	415-706	421-706	415-706-4	421-706-4			
3	3/4	6	.120	415-707	421-707	415-707-4	421-707-4			


CORNER RADIUS AXMILLS



2 and 3 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality

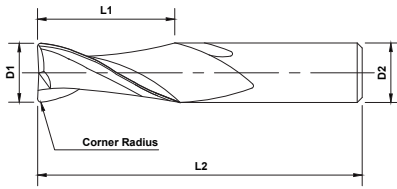High Performance



Length Key (K)


Standard Stub Long

Non-Ferrous
N

Quick Ship Items

K	OD	LOC	SHK	OAL	Radius	Uncoated		PowerZ		
	D1	L1	D2	L2	R	2 Flute	3 Flute	2 Flute	3 Flute	
1	1-1/2	1	1	4	.015	414-591	420-591	414-591-4	420-591-4	
		1	1	4	.020	414-592	420-592	414-592-4	420-592-4	
		1	1	4	.030	414-593	420-593	414-593-4	420-593-4	
		1	1	4	.040	414-594	420-594	414-594-4	420-594-4	
		1	1	4	.060	414-595	420-595	414-595-4	420-595-4	
		1	1	4	.090	414-596	420-596	414-596-4	420-596-4	
		1	1	4	.120	414-597	420-597	414-597-4	420-597-4	
		2	1	1	6	.015	415-711	421-711	415-711-4	421-711-4
			1	1	6	.020	415-712	421-712	415-712-4	421-712-4
			1	1	6	.030	415-713	421-713	415-713-4	421-713-4
			1	1	6	.040	415-714	421-714	415-714-4	421-714-4
			1	1	6	.060	415-715	421-715	415-715-4	421-715-4
			1	1	6	.090	415-716	421-716	415-716-4	421-716-4
			1	1	6	.120	415-717	421-717	415-717-4	421-717-4
	3	1	1	6	.015	415-731	421-731	415-731-4	421-731-4	
		1	1	6	.020	415-732	421-732	415-732-4	421-732-4	
		1	1	6	.030	415-733	421-733	415-733-4	421-733-4	
		1	1	6	.040	415-734	421-734	415-734-4	421-734-4	
		1	1	6	.060	415-735	421-735	415-735-4	421-735-4	
		1	1	6	.090	415-736	421-736	415-736-4	421-736-4	
		1	1	6	.120	415-737	421-737	415-737-4	421-737-4	
	4	1	1	6	.015	415-721	421-721	415-721-4	421-721-4	
		1	1	6	.020	415-722	421-722	415-722-4	421-722-4	
		1	1	6	.030	415-723	421-723	415-723-4	421-723-4	
		1	1	6	.040	415-724	421-724	415-724-4	421-724-4	
		1	1	6	.060	415-725	421-725	415-725-4	421-725-4	
		1	1	6	.090	415-726	421-726	415-726-4	421-726-4	
		1	1	6	.120	415-727	421-727	415-727-4	421-727-4	



SQUARE END AXMILLS




CHIPBREAKER

2 and 3 Flutes • Coated and Uncoated

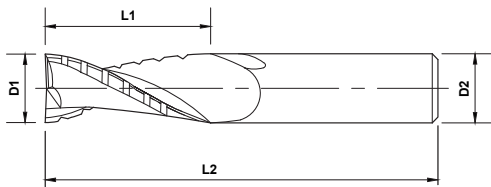- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Standard, Series 417, 423



Standard, Series 417, 423, PowerZ


Length Key (K)

Standard Stub Long

Non-Ferrous
N

K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute
Standard	1/8	1/2	1/8	1-1/2	417-002	423-002	417-002-4	423-002-4
	5/32	9/16	5/32	2	417-004	423-004	417-004-4	423-004-4
	3/16	3/4	3/16	2	417-006	423-006	417-006-4	423-006-4
	1/4	3/4	1/4	2-1/2	417-008	423-008	417-008-4	423-008-4
		1	1/4	2-1/2	417-010	423-010	417-010-4	423-010-4
	5/16	3/4	5/16	2-1/2	417-012	423-012	417-012-4	423-012-4
		1	5/16	3	417-014	423-014	417-014-4	423-014-4
	3/8	7/8	3/8	2-1/2	417-016	423-016	417-016-4	423-016-4
		1	3/8	2-1/2	417-018	423-018	417-018-4	423-018-4
	7/16	1	7/16	2-1/2	417-020	423-020	417-020-4	423-020-4
	1/2	1	1/2	3	417-022	423-022	417-022-4	423-022-4
		1-1/4	1/2	3	417-024	423-024	417-024-4	423-024-4
	9/16	1-1/4	9/16	3	417-026	423-026	417-026-4	423-026-4
	5/8	1-1/4	5/8	3-1/2	417-028	423-028	417-028-4	423-028-4
		1-5/8	5/8	3-1/2	417-030	423-030	417-030-4	423-030-4
	3/4	1-1/2	3/4	4	417-032	423-032	417-032-4	423-032-4
1-3/4		3/4	4	417-034	423-034	417-034-4	423-034-4	
1	1-1/2	1	4	417-036	423-036	417-036-4	423-036-4	



BALL END AXMILLS




CHIPBREAKER

2 and 3 Flutes • Coated and Uncoated

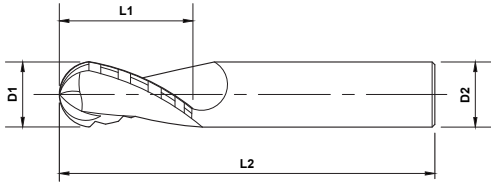- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Standard, Series 417, 423



Standard, Series 417, 423, PowerZ


Length Key (K)

Standard Stub Long

Non-Ferrous
N


K	OD	LOC	SHK	OAL	Uncoated		PowerZ	
	D1	L1	D2	L2	2 Flute	3 Flute	2 Flute	3 Flute
Standard	1/8	1/2	1/8	1-1/2	417-202	423-202	417-202-4	423-202-4
	5/32	9/16	5/32	2	417-204	423-204	417-204-4	423-204-4
	3/16	3/4	3/16	2	417-206	423-206	417-206-4	423-206-4
	1/4	3/4	1/4	2-1/2	417-208	423-208	417-208-4	423-208-4
		1	1/4	2-1/2	417-210	423-210	417-210-4	423-210-4
	5/16	3/4	5/16	2-1/2	417-212	423-212	417-212-4	423-212-4
		1	5/16	3	417-214	423-214	417-214-4	423-214-4
	3/8	7/8	3/8	2-1/2	417-216	423-216	417-216-4	423-216-4
		1	3/8	2-1/2	417-218	423-218	417-218-4	423-218-4
	7/16	1	7/16	2-1/2	417-220	423-220	417-220-4	423-220-4
	1/2	1	1/2	3	417-222	423-222	417-222-4	423-222-4
		1-1/4	1/2	3	417-224	423-224	417-224-4	423-224-4
	9/16	1-1/4	9/16	3	417-226	423-226	417-226-4	423-226-4
	5/8	1-1/4	5/8	3-1/2	417-228	423-228	417-228-4	423-228-4
		1-5/8	5/8	3-1/2	417-230	423-230	417-230-4	423-230-4
	3/4	1-1/2	3/4	4	417-232	423-232	417-232-4	423-232-4
1-3/4		3/4	4	417-234	423-234	417-234-4	423-234-4	
1	1-1/2	1	4	417-236	423-236	417-236-4	423-236-4	

SQUARE END NECKED AXMILLS



3 Flutes • Coated and Uncoated

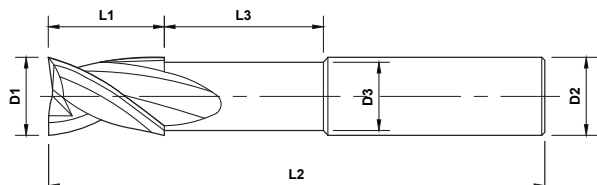- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



Standard, Series, 426
Long, Series 427


Length Key (K)

Standard Stub Long

Non-Ferrous
N


	OD	LOC	SHK	OAL	Neck OD	Neck L	Uncoated	PowerZ
K	D1	L1	D2	L2	D3	L3	3 Flute	3 Flute
1/8	1/8	1/4	1/8	1-1/2	.115	1/4	426-002	426-002-4
		1/4	1/8	3	.115	1-1/8	427-002	427-002-4
3/16	3/16	5/16	3/16	2	.175	3/16	426-004	426-004-4
		5/16	3/16	3	.175	1-1/16	427-004	427-004-4
1/4	1/4	3/8	1/4	2-1/2	.235	3/4	426-006	426-006-4
		3/8	1/4	4	.235	1-3/4	427-006	427-006-4
		3/4	1/4	4	.235	1-3/8	427-008	427-008-4
5/16	5/16	7/16	5/16	2-1/2	.291	11/16	426-008	426-008-4
		7/16	5/16	4	.291	1-11/16	427-010	427-010-4
		13/16	5/16	4	.291	1-5/16	427-012	427-012-4
3/8	3/8	1/2	3/8	2-1/2	.355	5/8	426-010	426-010-4
		1/2	3/8	4	.355	1-5/8	427-014	427-014-4
		1	3/8	4	.355	1-1/8	427-016	427-016-4
1/2	1/2	5/8	1/2	3	.475	3/4	426-012	426-012-4
		5/8	1/2	4	.475	1-3/4	427-018	427-018-4
		5/8	1/2	6	.475	2-3/4	427-020	427-020-4
		1-1/4	1/2	6	.475	2-1/8	427-022	427-022-4
5/8	5/8	3/4	5/8	3-1/2	.519	7/8	426-014	426-014-4
		3/4	5/8	5	.519	1-5/8	427-024	427-024-4
		3/4	5/8	6	.519	2-5/8	427-026	427-026-4
		1-5/8	5/8	6	.519	1-3/4	427-028	427-028-4
3/4	3/4	1	3/4	4	.715	5/8	426-016	426-016-4
		1	3/4	5	.715	1-1/2	427-030	427-030-4
		1-5/8	3/4	6	.715	1-3/4	427-034	427-034-4
		1	3/4	6	.715	2-3/8	427-032	427-032-4
1	1	1-1/4	1	5	.960	7/8	426-018	426-018-4
		2	1	5	.960	1/8	427-040	427-040-4
		1-1/4	1	6	.960	2-1/8	427-036	427-036-4
		1-1/4	1	7	.960	3-1/8	427-038	427-038-4

BALL END NECKED AXMILLS



3 Flutes • Coated and Uncoated

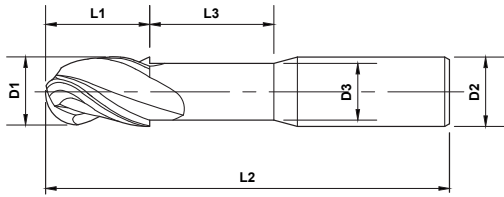- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



- Standard, Series 426
- Long, Series 427

Length Key (K)


- Standard
- Stub
- Long

Non-Ferrous
N

	OD	LOC	SHK	OAL	Neck OD	Neck L	Uncoated	PowerZ
K	D1	L1	D2	L2	D3	L3	3 Flute	3 Flute
Standard	1/8	1/4	1/8	1-1/2	.115	1/4	426-202	426-202-4
		1/4	1/8	3	.115	1-1/8	427-202	427-202-4
Standard	3/16	5/16	3/16	2	.175	3/16	426-204	426-204-4
		5/16	3/16	3	.175	1-1/16	427-204	427-204-4
Standard	1/4	3/8	1/4	2-1/2	.235	3/4	426-206	426-206-4
		3/8	1/4	4	.235	1-3/4	427-206	427-206-4
		3/4	1/4	4	.235	1-3/8	427-208	427-208-4
Standard	5/16	7/16	5/16	2-1/2	.291	11/16	426-208	426-208-4
		7/16	5/16	4	.291	1-11/16	427-210	427-210-4
Standard	3/8	1/2	3/8	2-1/2	.355	5/8	426-210	426-210-4
		1/2	3/8	4	.355	1-5/8	427-214	427-214-4
		1	3/8	4	.355	1-1/8	427-216	427-216-4
Standard	1/2	5/8	1/2	3	.475	1/2	426-212	426-212-4
		5/8	1/2	4	.475	1-3/4	427-218	427-218-4
		5/8	1/2	6	.475	2-3/4	427-220	427-220-4
		1-1/4	1/2	6	.475	2-1/8	427-222	427-222-4
Standard	5/8	3/4	5/8	3-1/2	.519	7/8	426-214	426-214-4
		3/4	5/8	5	.519	1-5/8	427-224	427-224-4
		3/4	5/8	6	.519	2-5/8	427-226	427-226-4
		1-5/8	5/8	6	.519	1-3/4	427-228	427-228-4
Standard	3/4	1	3/4	4	.715	5/8	426-216	426-216-4
		1	3/4	5	.715	1-1/2	427-230	427-230-4
		1-5/8	3/4	6	.715	1-3/4	427-234	427-234-4
		1	3/4	6	.715	2-3/8	427-232	427-232-4
Standard	1	1-1/4	1	5	.960	7/8	426-218	426-218-4
		2	1	5	.960	1/8	427-240	427-240-4
		1-1/4	1	6	.960	2-1/8	427-236	427-236-4
		1-1/4	1	7	.960	3-1/8	427-238	427-238-4


High Performance

CORNER RADIUS NECKED AXMILLS



3 Flutes • Coated and Uncoated

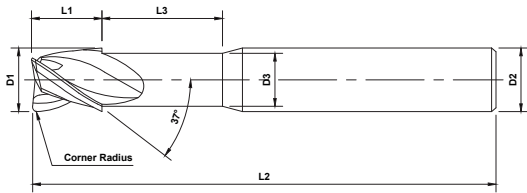- High Performance A-Gr-SiV submicron grain carbide
- Unique flute and relief angles for aluminum
- Faster speeds and feeds
- MAP certified quality



- Standard, Series 426
- Long, Series 427

Length Key (K)


- Standard
- Stub
- Long



Quick Ship Items


	OD	LOC	SHK	OAL	Neck OD	Neck L	Radius	Uncoated	PowerZ
K	D1	L1	D2	L2	D3	L3	R	3 Flute	3 Flute
Standard	1/8	1/4	1/8	1-1/2	.115	1/4	.015	426-401	426-401-4
		1/4	1/8	3	.115	1-1/8	.015	427-401	427-401-4
Standard	3/16	5/16	3/16	2	.175	3/16	.020	426-412	426-412-4
		5/16	3/16	3	.175	1-1/16	.020	427-412	427-412-4
Standard	1/4	3/8	1/4	2-1/2	.235	3/4	.020	426-422	426-422-4
		3/8	1/4	4	.235	1-3/4	.020	427-422	427-422-4
		3/4	1/4	4	.235	1-3/8	.020	427-432	427-432-4
Standard	3/8	1/2	3/8	2-1/2	.355	11/16	.030	426-433	426-433-4
		1/2	3/8	4	.355	1-11/16	.030	427-443	427-443-4
Standard	1/2	5/8	1/2	3	.475	3/4	.030	426-443	426-443-4
		5/8	1/2	4	.475	1-3/4	.030	427-453	427-453-4
		5/8	1/2	6	.475	2-3/4	.030	427-463	427-463-4
		1-1/4	1/2	6	.475	2-1/8	.030	427-473	427-473-4
Standard	5/8	3/4	5/8	3-1/2	.475	3/4	.030	426-453	426-453-4
		3/4	5/8	5	.475	1-3/4	.030	427-483	427-483-4
		3/4	5/8	6	.475	2-3/4	.030	427-493	427-493-4
		1-5/8	5/8	6	.475	2-1/8	.030	427-503	427-503-4
Standard	3/4	1	3/4	4	.519	7/8	.030	426-463	426-463-4
		1	3/4	5	.519	1-5/8	.030	427-513	427-513-4
		1-5/8	3/4	6	.519	1-3/4	.030	427-533	427-533-4
		1	3/4	6	.519	2-5/8	.030	427-523	427-523-4
Standard	1	1-1/4	1	5	.715	5/8	.030	426-473	426-473-4
		2	1	5	.715	1-3/4	.030	427-563	427-563-4
		1-1/4	1	6	.715	1-1/2	.030	427-543	427-543-4
		1-1/4	1	7	.715	2-3/8	.030	427-553	427-553-4

45° HELIX SQUARE HYPERMILLS



2 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Proven performer in aluminum



Standard, Series 428, PowerZ


Length Key (K)

Standard Stub Long

Non-Ferrous
N



	OD	LOC	SHK	OAL	Uncoated	PowerA	PowerZ
K	D1	L1	D2	L2	2 Flute	2 Flute	2 Flute
	1/4	1	1/4	2-1/2	428-002	428-002-1	428-002-4
	5/16	1	5/16	3	428-004	428-004-1	428-004-4
	3/8	1	3/8	2-1/2	428-006	428-006-1	428-006-4
	1/2	1-1/4	1/2	3	428-008	428-008-1	428-008-4
	5/8	1-5/8	5/8	3-1/2	428-010	428-010-1	428-010-4
	3/4	1-3/4	3/4	4	428-012	428-012-1	428-012-4
	1	1-1/2	1	4	428-014	428-014-1	428-014-4

55° HELIX SQUARE ALUMAZIPS



2 Flutes • Coated and Uncoated

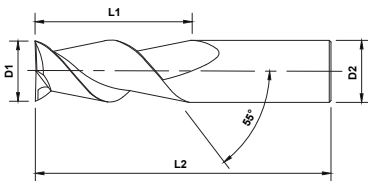- High Performance A-Gr-SiV submicron grain carbide
- Unique design for speed and finish in aluminum



Standard, Series 428

Non-Ferrous
N

	OD	LOC	SHK	OAL	Uncoated	PowerA
K	D1	L1	D2	L2	2 Flute	2 Flute
	1/8	1/2	1/8	1-1/2	428-202	428-202-1
	5/32	9/16	5/32	2	428-204	428-204-1
	3/16	3/4	3/16	2	428-206	428-206-1
	1/4	3/4	1/4	2-1/2	428-208	428-208-1
	5/16	3/4	5/16	2-1/2	428-210	428-210-1
	3/8	7/8	3/8	2-1/2	428-212	428-212-1
	1/2	1	1/2	3	428-214	428-214-1
	9/16	1-1/4	9/16	3	428-216	428-216-1
	5/8	1-1/4	5/8	3-1/2	428-218	428-218-1
	3/4	1-1/2	3/4	4	428-220	428-220-1
	1	1-1-2	1	4	428-222	428-222-1

ULTRA PERFORMANCE ENDMILLS

- **V4 Ultra**
- **V5 Ultra**
- **HY5 Ultra**
- **F45 Ultra**

Ultra

Harness the power of our silicon based coatings; PowerN and PowerNR.

These coatings make our tools outstanding in high heat applications suited for hard material machining.

Our special honed flutes result in quieter running and an increase in overall tool precision.






















































































TABLE OF CONTENTS

	V4 Ultra Square Endmills . . . V4%	100						
	V4 Ultra Ball Endmills . . . V4%	101						
	V4 Ultra Corner Radius Endmills. . . V4%	102						
	V5 Ultra Square Endmills . . . V5%	103						
	V5 Ultra Ball Endmills . . . V5%	104						
	V5 Ultra Corner Radius Endmills. . . V5%	105						
	HY5 Ultra Square Endmills . . . HY5	106						
	HY5 Ultra Corner Radius Endmills. . . HY5	107						
	F45 Ultra Square Endmills. . . F45	108						
	F45 Ultra Corner Radius Endmills . . . F45	109						

Features Legend

	4 Flutes		Plain shank
	5 Flutes		Flat Shank
	6 Flutes		Corner Radius
	Ball End		Square End
	4 Flutes Ball		5 Flutes Ball

Coatings Legend


	Power N Coating
	Power NR Coating

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized Volume)



Our superior tungsten carbide gives you the ability to be *aggressive* when you need to be. Growth inhibitors in our sub-micron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

Please contact us for our full line of metric products.


V4 ULTRA SQUARE ENDMILLS



4 Flutes • Coated with and without Flat

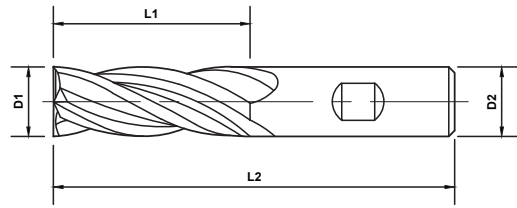

- Stub, Series 452, PowerN
- Standard, Series 450, PowerN
- Long, Series 451, PowerN



- Stub, Series 452, PowerNR
- Standard, Series 450, PowerNR
- Long, Series 451, PowerNR



Length Key (K)


■ Standard
 ■ Stub
 ■ Long

Cermat
 Cast Iron
K
 Titanium
S
 Stainless
M
 Steel
P
 Hardened
H


K	OD	LOC	SHK	OAL	PowerN		PowerNR	
					No Flat	With Flat	No Flat	With Flat
1/8	1/8	1/4	1/8	1-1/2	452-004-5	-	452-004-8	-
		3/8	1/8	1-1/2	450-002-5	-	450-002-8	-
3/16	3/16	3/8	3/16	2	452-006-5	-	452-006-8	-
		7/16	3/16	2	450-006-5	-	450-006-8	-
		3/4	3/16	2-1/2	450-042-5	-	450-042-8	-
1/4	1/4	1/2	1/4	2	452-010-5	452-010W-5	452-010-8	452-010W-8
		5/8	1/4	2-1/2	450-010-5	450-010W-5	450-010-8	450-010W-8
		3/4	1/4	2-1/2	450-040-5	450-040W-5	450-040-8	450-040W-8
		1-1/8	1/4	3	451-002-5	451-002W-5	451-002-8	451-002W-8
5/16	5/16	1/2	5/16	2	452-012-5	452-012W-5	452-012-8	452-012W-8
		13/16	5/16	2-1/2	450-012-5	450-012W-5	450-012-8	450-012W-8
		1-1/8	5/16	3	451-004-5	451-004W-5	451-004-8	451-004W-8
3/8	3/8	5/8	3/8	2	452-014-5	452-014W-5	452-014-8	452-014W-8
		7/8	3/8	2-1/2	450-016-5	450-016W-5	450-016-8	450-016W-8
1/2	1/2	5/8	1/2	2-1/2	452-018-5	452-018W-5	452-018-8	452-018W-8
		1	1/2	3	450-022-5	450-022W-5	450-022-8	450-022W-8
		1-1/4	1/2	3	450-024-5	450-024W-5	450-024-8	450-024W-8
		2	1/2	4	451-008-5	451-008W-5	451-008-8	451-008W-8
5/8	5/8	3/4	5/8	3	452-020-5	452-020W-5	452-020-8	452-020W-8
		1-1/4	5/8	3-1/2	450-028-5	450-028W-5	450-028-8	450-028W-8
		2-1/4	5/8	5	451-010-5	451-010W-5	451-010-8	451-010W-8
3/4	3/4	1	3/4	3	452-024-5	452-024W-5	452-024-8	452-024W-8
		1-1/2	3/4	4	450-030-5	450-030W-5	450-030-8	450-030W-8
		4	3/4	6	451-016-5	451-016W-5	451-016-8	451-016W-8
1	1	1-1/2	1	4	450-034-5	450-034W-5	450-034-8	450-034W-8
		3	1	6	451-020-5	451-020W-5	451-020-8	451-020W-8

We manufacture a full range of cutting diameters. Please call for availability.


V4 ULTRA BALL ENDMILLS



4 Flutes • Coated with and without Flat

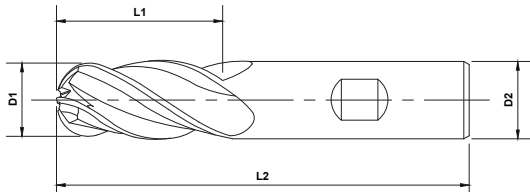

- Ultra performance A-Gr-SiV submicron grain carbide
- Unique variable design, coating, and edge quality
- Best performance and finish on wide range of materials




- Stub, Series 452, PowerN
- Standard, Series 450, PowerN
- Long, Series 451, PowerN



- Stub, Series 452, PowerNR
- Standard, Series 450, PowerNR
- Long, Series 451, PowerNR

Length Key (K)


Standard Stub Long




K	OD	LOC	SHK	OAL	PowerN		PowerNR	
	D1	L1	D2	L2	No Flat	With Flat	No Flat	With Flat
1/8	1/8	1/4	1/8	1-1/2	452-204-5	-	452-204-8	-
		3/8	1/8	1-1/2	450-202-5	-	450-202-8	-
3/16	3/16	3/8	3/16	2	452-206-5	-	452-206-8	-
		7/16	3/16	2	450-206-5	-	450-206-8	-
		3/4	3/16	2-1/2	450-242-5	-	450-242-8	-
1/4	1/4	1/2	1/4	2	452-210-5	452-210W-5	452-210-8	452-210W-8
		5/8	1/4	2-1/2	450-210-5	450-210W-5	450-210-8	450-210W-8
		3/4	1/4	2-1/2	450-240-5	450-240W-5	450-240-8	450-240W-8
		1-1/8	1/4	3	451-202-5	451-202W-5	451-202-8	451-202W-8
5/16	5/16	1/2	5/16	2	452-212-5	452-212W-5	452-212-8	452-212W-8
		13/16	5/16	2-1/2	450-212-5	450-212W-5	450-212-8	450-212W-8
		1-1/8	5/16	3	451-204-5	451-204W-5	451-204-8	451-204W-8
3/8	3/8	5/8	3/8	2	452-214-5	452-214W-5	452-214-8	452-214W-8
		7/8	3/8	2-1/2	450-216-5	450-216W-5	450-216-8	450-216W-8
1/2	1/2	5/8	1/2	2-1/2	452-218-5	452-218W-5	452-218-8	452-218W-8
		1	1/2	3	450-222-5	450-222W-5	450-222-8	450-222W-8
		1-1/4	1/2	3	450-224-5	450-224W-5	450-224-8	450-224W-8
		2	1/2	4	451-208-5	451-208W-5	451-208-8	451-208W-8
5/8	5/8	3/4	5/8	3	452-220-5	452-220W-5	452-220-8	452-220W-8
		1-1/4	5/8	3-1/2	450-228-5	450-228W-5	450-228-8	450-228W-8
		2-1/4	5/8	5	451-210-5	451-210W-5	451-210-8	451-210W-8
3/4	3/4	1	3/4	3	452-224-5	452-224W-5	452-224-8	452-224W-8
		1-1/2	3/4	4	450-230-5	450-230W-5	450-230-8	450-230W-8
		4	3/4	6	451-216-5	451-216W-5	451-216-8	451-216W-8
1	1	1-1/2	1	4	450-234-5	450-234W-5	450-234-8	450-234W-8
		3	1	6	451-220-5	451-220W-5	451-220-8	451-220W-8

We manufacture a full range of cutting diameters. Please call for availability.

V4 ULTRA CORNER RADIUS




4 Flutes • Coated with and without Flat

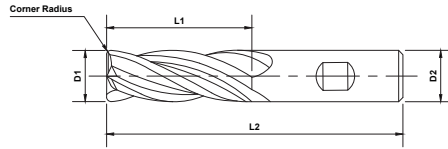

- Ultra performance A-Gr-SiV submicron grain carbide
- Unique variable design, coating, and edge quality
- Best performance and finish on wide range of materials



- Stub, Series 452, PowerN
- Standard, Series 450, PowerN
- Long, Series 451, PowerN



- Stub, Series 452, PowerNR
- Standard, Series 450, PowerNR
- Long, Series 451, PowerNR


Length Key (K)



K	OD	LOC	SHK	OAL	Radius	PowerN		PowerNR	
						No Flat	With Flat	No Flat	With Flat
Stub	1/8	1/4	1/8	1-1/2	.015	452-401-5	-	452-401-8	-
		1/4	1/8	1-1/2	.020	452-402-5	-	452-402-8	-
Standard	3/16	3/8	3/16	2	.020	452-422-5	-	452-422-8	-
		7/16	3/16	2	.020	450-412-5	-	450-412-8	-
Long	3/4	3/16	2-1/2	.020	450-532-5	-	450-532-8	-	
		1/2	1/4	2	.020	452-442-5	452-442W-5	452-442-8	452-442W-8
Stub	1/4	5/8	1/4	2-1/2	.020	450-422-5	450-422W-5	450-422-8	450-422W-8
		3/4	1/4	2-1/2	.020	450-542-5	450-542W-5	450-542-8	450-542W-8
Standard	1-1/8	1/4	3	.020	451-402-5	451-402W-5	451-402-8	451-402W-8	
		1/2	5/16	2	.030	452-453-5	452-453W-5	452-453-8	452-453W-8
Long	5/16	13/16	5/16	2-1/2	.030	450-433-5	450-433W-5	450-433-8	450-433W-8
		5/8	3/8	2	.030	452-463-5	452-463W-5	452-463-8	452-463W-8
Stub	3/8	7/8	3/8	2-1/2	.030	450-443-5	450-443W-5	450-443-8	450-443W-8
		1-1/8	3/8	3	.030	451-423-5	451-423W-5	451-423-8	451-423W-8
Standard	1/2	5/8	1/2	2-1/2	.030	452-483-5	452-483W-5	452-483-8	452-483W-8
		1	1/2	3	.030	450-463-5	450-463W-5	450-463-8	450-463W-8
Long	1-1/4	1/2	3	.030	450-473-5	450-473W-5	450-473-8	450-473W-8	
		2	1/2	4	.030	451-433-5	451-433W-5	451-433-8	451-433W-8
Stub	5/8	3/4	5/8	3	.030	452-493-5	452-493W-5	452-493-8	452-493W-8
		1-1/4	5/8	3-1/2	.030	450-493-5	450-493W-5	450-493-8	450-493W-8
Standard	2-1/4	5/8	5	.030	451-443-5	451-443W-5	451-443-8	451-443W-8	
		1	3/4	3	.030	452-503-5	452-503W-5	452-503-8	452-503W-8
Long	3/4	7/8	3/4	3-1/2	.030	452-513-5	452-513W-5	452-513-8	452-513W-8
		1-1/2	3/4	4	.030	450-503-5	450-503W-5	450-503-8	450-503W-8
Stub	1-5/8	3/4	4	.030	450-513-5	450-513W-5	450-513-8	450-513W-8	
		3	3/4	6	.030	451-463-5	451-463W-5	451-463-8	451-463W-8
Standard	4	3/4	6	.030	451-473-5	451-473W-5	451-473-8	451-473W-8	
		1-1/2	1	4	.045	450-524-5	450-524W-5	450-524-8	450-524W-8
Long	2-1/4	1	5	.045	451-484-5	451-484W-5	451-484-8	451-484W-8	
		3	1	6	.045	451-494-5	451-494W-5	451-494-8	451-494W-8



We manufacture a full range of cutting diameters and Endcut Radii. Please call for availability.

V5 ULTRA SQUARE ENDMILLS



5 Flutes • Coated with and without Flat

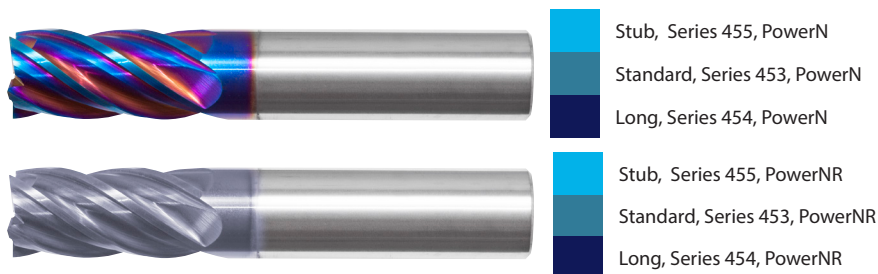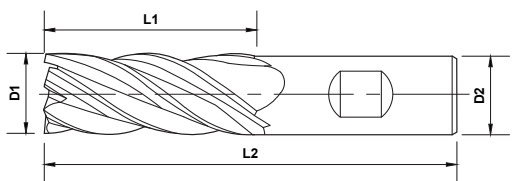- Ultra performance A-Gr-SiV submicron grain carbide
- Unique variable design, coating, and edge quality
- Best performance and finish on wide range of materials



Ultra Endmills


Length Key (K)




K	OD	LOC	SHK	OAL	PowerN		PowerNR	
					No Flat	With Flat	No Flat	With Flat
Standard	5/16	1/2	5/16	2	455-012-5	455-012W-5	455-012-8	455-012W-8
		13/16	5/16	2-1/2	453-008-5	453-008W-5	453-008-8	453-008W-8
Stub	3/8	5/8	3/8	2	455-014-5	455-014W-5	455-014-8	455-014W-8
		7/8	3/8	2-1/2	453-010-5	453-010W-5	453-010-8	453-010W-8
		1-1/8	3/8	3	454-004-5	454-004W-5	454-004-8	454-004W-8
Standard	1/2	5/8	1/2	2-1/2	455-018-5	455-018W-5	455-018-8	455-018W-8
		1	1/2	3	453-014-5	453-014W-5	453-014-8	453-014W-8
		1-1/4	1/2	3	453-016-5	453-016W-5	453-016-8	453-016W-8
		2	1/2	4	454-006-5	454-006W-5	454-006-8	454-006W-8
Stub	5/8	3/4	5/8	3	455-020-5	455-020W-5	455-020-8	455-020W-8
		1-1/4	5/8	3-1/2	453-020-5	453-020W-5	453-020-8	453-020W-8
		2-1/4	5/8	5	454-008-5	454-008W-5	454-008-8	454-008W-8
Standard	3/4	7/8	3/4	3-1/2	455-024-5	455-024W-5	455-024-8	455-024W-8
		1	3/4	3	455-022-5	455-022W-5	455-022-8	455-022W-8
		1-1/2	3/4	4	453-024-5	453-024W-5	453-024-8	453-024W-8
		1-5/8	3/4	4	453-022-5	453-022W-5	453-022-8	453-022W-8
		2-1/4	3/4	5	454-010-5	454-010W-5	454-010-8	454-010W-8
		3	3/4	6	454-012-5	454-012W-5	454-012-8	454-012W-8
Long	1	1-1/2	1	4	453-026-5	453-026W-5	453-026-8	453-026W-8
		2-1/2	1	5	454-014-5	454-014W-5	454-014-8	454-014W-8
		3	1	6	454-016-5	454-016W-5	454-016-8	454-016W-8
		4	1	7	454-018-5	454-018W-5	454-018-8	454-018W-8

We manufacture a full range of cutting diameters. Please call for availability.


V5 ULTRA BALL ENDMILLS



5 Flutes • Coated with and without Flat

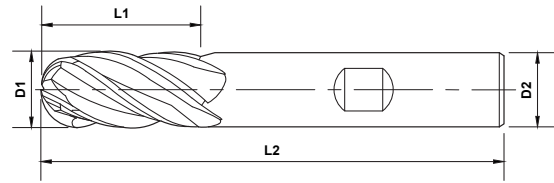

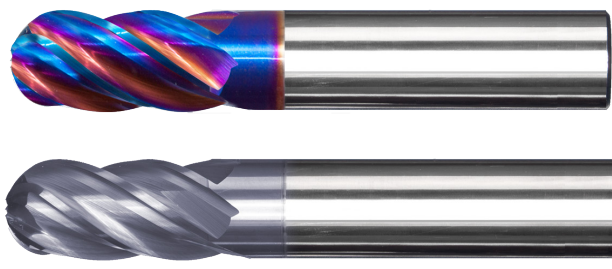
- Ultra performance A-Gr-SiV submicron grain carbide
- Unique variable design, coating, and edge quality
- Best performance and finish on wide range of materials
- MAP certified quality



- Stub, Series 455, PowerN
 - Standard, Series 453, PowerN
 - Long, Series 454, PowerN
-
- Stub, Series 455, PowerNR
 - Standard, Series 453, PowerNR
 - Long, Series 454, PowerNR

Length Key (K)


Standard
 Stub
 Long




K	OD	LOC	SHK	OAL	PowerN		PowerNR	
	D1	L1	D2	L2	No Flat	With Flat	No Flat	With Flat
	5/16	1/2	5/16	2	455-212-5	455-212W-5	455-212-8	455-212W-8
		13/16	5/16	2-1/2	453-208-5	453-208W-5	453-208-8	453-208W-8
	3/8	5/8	3/8	2	455-214-5	455-214W-5	455-214-8	455-214W-8
		7/8	3/8	2-1/2	453-210-5	453-210W-5	453-210-8	453-210W-8
		1-1/8	3/8	3	454-204-5	454-204W-5	454-204-8	454-204W-8
		5/8	1/2	2-1/2	455-218-5	455-218W-5	455-218-8	455-218W-8
	1/2	1	1/2	3	453-214-5	453-214W-5	453-214-8	453-214W-8
		1-1/4	1/2	3	453-216-5	453-216W-5	453-216-8	453-216W-8
		2	1/2	4	454-206-5	454-206W-5	454-206-8	454-206W-8
		3/4	5/8	3	455-220-5	455-220W-5	455-220-8	455-220W-8
	5/8	1-1/4	5/8	3-1/2	453-220-5	453-220W-5	453-220-8	453-220W-8
		2-1/4	5/8	5	454-208-5	454-208W-5	454-208-8	454-208W-8
	3/4	1	3/4	3	455-222-5	455-222W-5	455-222-8	455-222W-8
		1-1/2	3/4	4	453-222-5	453-222W-5	453-222-8	453-222W-8
		3	3/4	6	454-212-5	454-212W-5	454-212-8	454-212W-8
		1-1/2	1	4	453-226-5	453-226W-5	453-226-8	453-226W-8
	1	3	1	6	454-216-5	454-216W-5	454-216-8	454-216W-8

We manufacture a full range of cutting diameters. Please call for availability.

V5 ULTRA CORNER RADIUS




5 Flutes • Coated with and without Flat

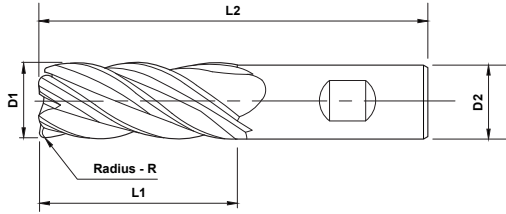

- Ultra performance A-Gr-SiV submicron grain carbide
- Unique variable design, coating, and edge quality
- Best performance and finish on wide range of materials
- MAP certified quality



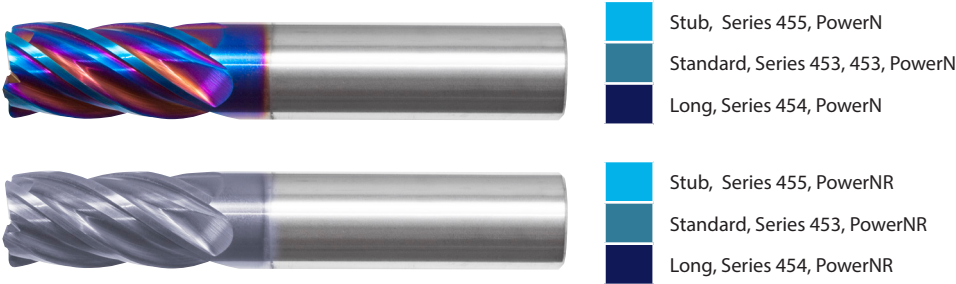Ultra Endmills



- Standard, Series 455, PowerN
- Standard, Series 453, 453, PowerN
- Long, Series 454, PowerN
- Stub, Series 455, PowerNR
- Standard, Series 453, PowerNR
- Long, Series 454, PowerNR

Length Key (K)


Standard Stub Long




K	OD	LOC	SHK	OAL	Radius	PowerN		PowerNR	
						No Flat	With Flat	No Flat	With Flat
5/16	5/16	1/2	5/16	2	.030	455-453-5	455-453W-5	455-453-8	455-453W-8
		13/16	5/16	2-1/2	.030	453-433-5	453-433W-5	453-433-8	453-433W-8
3/8	3/8	7/8	3/8	2-1/2	.030	453-443-5	453-443W-5	453-443-8	453-443W-8
		1-1/8	3/8	3	.030	454-413-5	454-413W-5	454-413-8	454-413W-8
1/2	1/2	5/8	1/2	2-1/2	.030	455-483-5	455-483W-5	455-483-8	455-483W-8
		1	1/2	3	.030	453-463-5	453-463W-5	453-463-8	453-463W-8
		2	1/2	4	.030	454-423-5	454-423W-5	454-423-8	454-423W-8
5/8	5/8	3/4	5/8	3	.030	455-493-5	455-493W-5	455-493-8	455-493W-8
		1-1/4	5/8	3-1/2	.030	453-493-5	453-493W-5	453-493-8	453-493W-8
		2-1/4	5/8	5	.030	454-433-5	454-433W-5	454-433-8	454-433W-8
3/4	3/4	1	3/4	3	.030	455-503-5	455-503W-5	455-503-8	455-503W-8
		7/8	3/4	3-1/2	.030	455-513-5	455-513W-5	455-513-8	455-513W-8
		1-1/2	3/4	4	.030	453-503-5	453-503W-5	453-503-8	453-503W-8
		1-5/8	3/4	4	.030	453-513-5	453-513W-5	453-513-8	453-513W-8
		3	3/4	6	.030	454-453-5	454-453W-5	454-453-8	454-453W-8
1	1	1-1/2	1	4	.030	453-523-5	453-523W-5	453-523-8	453-523W-8
		3	1	6	.045	454-474-5	454-474W-5	454-474-8	454-474W-8

We manufacture a full range of cutting diameters. Please call for availability.


HY5 ULTRA SQUARE ENDMILLS



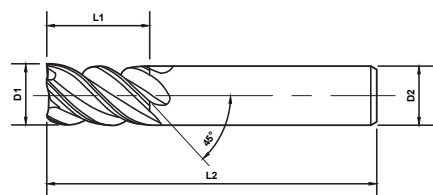
5 Flutes • Coated • With and without Flat



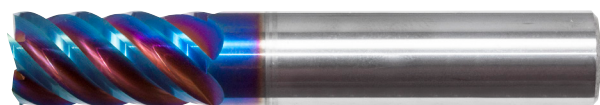- Ultra performance A-Gr-SiV submicron grain carbide
- Unique 45° 5 flute design, superior coating and edge quality
- Best performance and finish on wide range of materials- Specially on stainless steel, titanium and other exotic materials



- Stub, Series 458, PowerN
- Standard, Series 456, PowerN
- Long, Series 457, PowerN



- Stub, Series 458, PowerNR
- Standard, Series 456, PowerNR
- Long, Series 457, PowerNR



Length Key (K)


Standard Stub Long




K	OD	LOC	SHK	OAL	PowerN		PowerNR	
					No Flat	With Flat	No Flat	With Flat
1/8	D1	1/4	1/8	1-1/2	458-004-5	-	458-004-8	-
		1/2	1/8	1-1/2	456-002-5	-	456-002-8	-
3/16	D1	3/8	3/16	2	458-006-5	-	458-006-8	-
		9/16	3/16	2	456-006-5	-	456-006-8	-
1/4	D1	1/2	1/4	2	458-010-5	458-010W-5	458-010-8	458-010W-8
		3/4	1/4	2-1/2	456-010-5	456-010W-5	456-010-8	456-010W-8
		1-1/8	1/4	3	457-002-5	457-002W-5	457-002-8	457-002W-8
5/16	D1	1/2	5/16	2	458-012-5	458-012W-5	458-012-8	458-012W-8
		13/16	5/16	2-1/2	456-012-5	456-012W-5	456-012-8	456-012W-8
		1-1/8	5/16	3	457-004-5	457-004W-5	457-004-8	457-004W-8
3/8	D1	5/8	3/8	2	458-014-5	458-014W-5	458-014-8	458-014W-8
		7/8	3/8	2-1/2	456-016-5	456-016W-5	456-016-8	456-016W-8
		1-1/8	3/8	3	457-006-5	457-006W-5	457-006-8	457-006W-8
1/2	D1	5/8	1/2	2-1/2	458-018-5	458-018W-5	458-018-8	458-018W-8
		1	1/2	3	456-022-5	456-022W-5	456-022-8	456-022W-8
		1-1/4	1/2	3	456-024-5	456-024W-5	456-024-8	456-024W-8
5/8	D1	2	1/2	4	457-008-5	457-008W-5	457-008-8	457-008W-8
		3/4	5/8	3	458-020-5	458-020W-5	458-020-8	458-020W-8
		1-1/4	5/8	3-1/2	456-028-5	456-028W-5	456-028-8	456-028W-8
3/4	D1	1	3/4	3	458-024-5	458-024W-5	458-024-8	458-024W-8
		1-1/2	3/4	4	456-030-5	456-030W-5	456-030-8	456-030W-8
1	D1	1-1/2	1	4	456-034-5	456-034W-5	456-034-8	456-034W-8
		3	1	6	457-020-5	457-020W-5	457-020-8	457-020W-8

We manufacture a full range of cutting diameters. Please call for availability.


HY5 ULTRA CORNER RADIUS



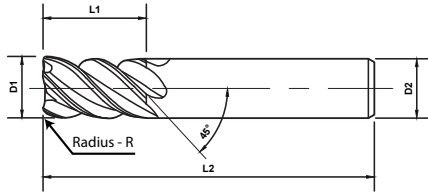
5 Flutes • Coated • With and without Flat



- Ultra performance A-Gr-SiV submicron grain carbide
- Unique 45° 5 flute design, superior coating and edge quality
- Best performance and finish on wide range of materials- Specially on stainless steel, titanium and other exotic materials



- Stub, Series 458, PowerN
- Standard, Series 456, PowerN
- Long, Series 457, PowerN



- Stub, Series 458, PowerNR
- Standard, Series 456, PowerNR
- Long, Series 457, PowerNR



Ultra Endmills

Length Key (K)


Standard Stub Long



K	OD	LOC	SHK	OAL	Radius	PowerN		PowerNR	
	D1	L1	D2	L2	R	No Flat	With Flat	No Flat	With Flat
1/8	1/8	1/4	1/8	1-1/2	.020	458-402-5	-	458-402-8	-
	3/16	3/8	3/16	2	.020	458-422-5	-	458-422-8	-
1/4	1/4	3/4	1/4	2-1/2	.015	456-421-5	456-421W-5	456-421-8	456-421W-8
		1-1/8	1/4	3	.020	457-402-5	457-402W-5	457-402-8	457-402W-8
5/16	5/16	1/2	5/16	2	.030	458-453-5	458-453W-5	458-453-8	458-453W-8
		13/16	5/16	2-1/2	.030	456-433-5	456-433W-5	456-433-8	456-433W-8
3/8	3/8	5/8	3/8	2	.030	458-463-5	458-463W-5	458-463-8	458-463W-8
		7/8	3/8	2-1/2	.030	456-443-5	456-443W-5	456-443-8	456-443W-8
		1-1/8	3/8	3	.030	457-423-5	457-423W-5	457-423-8	457-423W-8
1/2	1/2	5/8	1/2	2-1/2	.030	458-483-5	458-483W-5	458-483-8	458-483W-8
		1	1/2	3	.030	456-463-5	456-463W-5	456-463-8	456-463W-8
		1-1/4	1/2	3	.030	456-473-5	456-473W-5	456-473-8	456-473W-8
		2	1/2	4	.030	457-433-5	457-433W-5	457-433-8	457-433W-8
5/8	5/8	3/4	5/8	3	.030	458-493-5	458-493W-5	458-493-8	458-493W-8
		1-1/4	5/8	3-1/2	.030	456-493-5	456-493W-5	456-493-8	456-493W-8
		2-1/4	5/8	5	.030	457-443-5	457-443W-5	457-443-8	457-443W-8
3/4	3/4	1	3/4	3	.030	458-503-5	458-503W-5	458-503-8	458-503W-8
		7/8	3/4	3-1/2	.030	458-513-5	458-513W-5	458-513-8	458-513W-8
		2-1/4	3/4	5	.030	457-453-5	457-453W-5	457-453-8	457-453W-8
		3	3/4	6	.030	457-463-5	457-463W-5	457-463-8	457-463W-8
		4	3/4	6	.030	457-473-5	457-473W-5	457-473-8	457-473W-8
1	1	1-1/2	1	4	.045	456-524-5	456-524W-5	456-524-8	456-524W-8
		2-1/4	1	5	.045	457-484-5	457-484W-5	457-484-8	457-484W-8
		3	1	6	.045	457-494-5	457-494W-5	457-494-8	457-494W-8



We manufacture a full range of cutting diameters and endcut radii. Please call for availability.

F45 ULTRA SQUARE ENDMILLS




6 Flutes • Coated

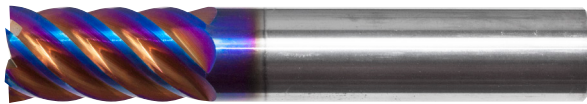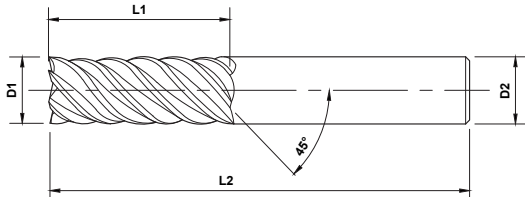- Ultra performance A-Gr-SiV submicron grain carbide
- Unique 45° 6 flute design, superior coating and edge quality
- Best performance and finish on wide range of materials- Specially on stainless steel, titanium and other exotic materials
- MAP certified quality




Standard, Series 459, PowerN



Standard, Series 459, PowerNR

Length Key (K)


Standard (dark blue square) Stub (light blue square) Long (dark blue square)



	OD	LOC	SHK	OAL	PowerN	PowerNR	
K	D1	L1	D2	L2			
Standard	3/16	5/8	3/16	2	459-002-5	459-002-8	
	1/4	3/4	1/4	2-1/2	459-004-5	459-004-8	
	5/16	7/8	5/16	2-1/2	459-006-5	459-006-8	
	3/8	1	3/8	2-1/2	459-008-5	459-008-8	
	7/16	1	7/16	2-1/2	459-010-5	459-010-8	
	1/2	1	1/2	3	459-012-5	459-012-8	
	9/16	1	9/16	3	459-014-5	459-014-8	
	5/8	1-1/4	5/8	3-1/2	459-016-5	459-016-8	
	3/4	1-1/2	3/4	4	459-018-5	459-018-8	
	7/8	1-1/2	7/8	4	459-020-5	459-020-8	
	Stub	1	1-1/2	1	4	459-022-5	459-022-8
			2-1/4	1	5	459-024-5	459-024-8


We manufacture a full range of cutting diameters. Please call for availability.

F45 ULTRA CORNER RADIUS




6 Flutes • Coated

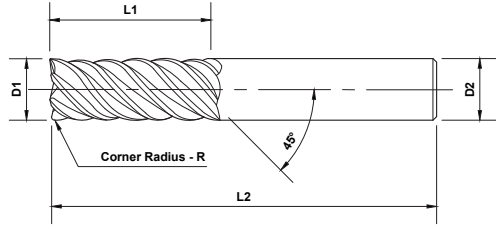- Ultra Performance A-Gr-SiV submicron grain carbide
- Unique 45° 6 flute design, superior coating and edge quality
- Best performance and finish on wide range of materials- Specially on stainless steel, titanium and other exotic materials
- MAP certified quality




Ultra Endmills



Standard, Series 459, PowerN



Standard, Series 459, PowerNR



	OD	LOC	SHK	OAL	Radius	PowerN	PowerNR
K	D1	L1	D2	L2	R		
	1/4	3/4	1/4	2-1/2	.010	459-200-5	459-200-8
	5/16	7/8	5/16	2-1/2	.012	459-210-5	459-210-8
	3/8	1	3/8	2-1/2	.012	459-220-5	459-220-8
	7/16	1	7/16	2-1/2	.015	459-231-5	459-231-8
	1/2	1	1/2	3	.015	459-241-5	459-241-8
	9/16	1	9/16	3	.020	459-252-5	459-252-8
	5/8	1-1/4	5/8	3-1/2	.020	459-262-5	459-262-8
	3/4	1-1/2	3/4	4	.030	459-273-5	459-273-8
	7/8	1-1/2	7/8	4	.030	459-283-5	459-283-8
	1	1-1/2	1	4	.030	459-293-5	459-293-8

We manufacture a full range of cutting diameters and endcut radii. Please call for availability.

ULTRA PERFORMANCE ROUTERS

SPECIALLY SELECTED

- Routers
- OFX ("O" Flute Extreme)
- CRFP Routers with CVD Diamond Coating



PowerRD

PowerRD
Real Diamond Coating










Our PowerRD Coating is our hardest coating at approximately 8,000 Vickers. PowerRD is a perfect selection for machining aluminum, graphite, and green ceramics.










ISO 9001:2015
CERTIFIED



TABLE OF CONTENTS

	2 Flute Compression Routers	112	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	2 Flute Compression Chipbreaker Routers	113	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	3 Flute Compression Routers	114	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	4 Flute Combination Compression Routers	115	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	4 Flute Compression Routers	116	Fiberglass	Graphite	Composite	Metal Matrix	Carbon Fiber	Honeycomb
	4 Flute Fiberglass Mill End Routers	117	Fiberglass					
	Fiberglass and Composite Finishers	118	Fiberglass					
	OFX O-Flute Xtreme Routers	119					Plastics	
	CVD Nano Crystalline Routers	120	CRFP	Graphite	Composite		Carbon Fiber	Honeycomb

Features Legend

	2 Flutes		Multi-Flute
	3 Flutes		Plain Shank
	4 Flutes		Corner Radius
	6 Flutes		

Coatings Legend

	PowerA Coating
	PowerZ Coating
	PowerN Coating
	PowerRD Coating

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized Volume)

Our superior tungsten carbide gives you the ability to be *aggressive* when you need to be. Growth inhibitors in our sub-micron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

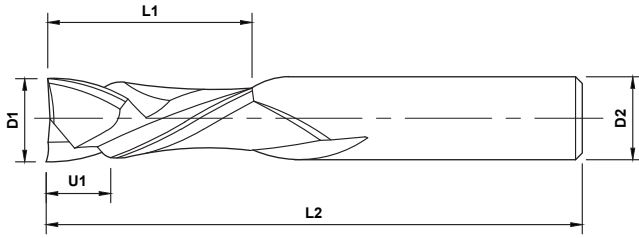
Please contact us for our full line of metric products.

2 FLUTE COMPRESSION



2 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique right and left fluting, controls finish on both sides of work-piece
- Effective for wide range of materials
- MAP certified quality



Standard, Series 810



OD	LOC	Upcut	SHK	OAL	Uncoated		PowerA		PowerZ	
					Standard	Mortise	Standard	Mortise	Standard	Mortise
D1	L1	U1	D2	L2						
1/4	7/8	.188	1/4	2-1/2	-	810-202	-	810-202-1	-	810-202-4
	7/8	.2756	1/4	2-1/2	810-030	-	810-030-1	-	810-030-4	-
	7/8	.385	1/4	2-1/2	810-020	-	810-020-1	-	810-020-4	-
3/8	7/8	.188	3/8	3	-	810-204	-	810-204-1	-	810-204-4
	1	.3543	1/2	3	810-034	-	810-034-1	-	810-034-4	-
	1	.440	1/2	3	810-024	-	810-024-1	-	810-024-4	-
	1-1/8	.188	3/8	3	-	810-210	-	810-210-1	-	810-210-4
	1-1/8	.188	3/8	3	-	810-212*	-	810-212-1*	-	810-212-4*
	1-1/8	.3543	1/2	3	810-026	-	810-026-1	-	810-026-4	-
	1-1/8	.495	3/8	3	810-002	-	810-002-1	-	810-002-4	-
	1-1/4	.3543	3/8	3	810-032	-	810-032-1	-	810-032-4	-
1/2	7/8	.200	1/2	3	-	810-206	-	810-206-1	-	810-206-4
	1	.440	1/2	3	810-004	-	810-004-1	-	810-004-4	-
	1-1/8	.495	1/2	3	810-006	-	810-006-1	-	810-006-4	-
	1-1/4	.250	1/2	3	-	810-214	-	810-214-1	-	810-214-4
	1-5/16	.577	1/2	3	810-022	-	810-022-1	-	810-022-4	-
	1-3/8	.200	1/2	3-1/2	-	810-208	-	810-208-1	-	810-208-4
	1-3/8	.605	1/2	3-1/2	810-008	-	810-008-1	-	810-008-4	-
	1-5/8	.433	1/2	3-1/2	810-028	-	810-028-1	-	810-028-4	-
	1-5/8	.715	1/2	4	810-010	-	810-010-1	-	810-010-4	-
	1-5/8	.715	1/2	4	810-012*	-	810-012-1*	-	810-012-4*	-
5/8	2-1/4	.990	5/8	5	810-014	-	810-014-1	-	810-014-4	-
3/4	1-7/8	.825	3/4	4	810-016	-	810-016-1	-	810-016-4	-
	2-1/2	1.10	3/4	5	810-018	-	810-018-1	-		

* Left Hand Cut

PowerNR Coating Available


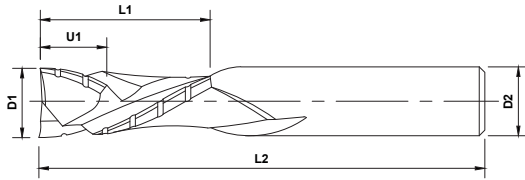
2 FLUTE COMPRESSION



CHIPBREAKER FINISHER

2 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique right and left fluting, controls finish on both sides of work-piece
- Effective for wide range of materials
- MAP certified quality



Standard, Series 810

High Performance Routers



OD	LOC	Upcut	SHK	OAL	Uncoated	PowerA	PowerZ
D1	L1	U1	D2	L2	Standard	Standard	Standard
3/8	7/8	.385	3/8	3	810-302	810-302-1	810-302-4
	1-1/8	.495	3/8	3	810-304	810-304-1	810-304-4
1/2	7/8	.385	1/2	3	810-318	810-318-1	810-318-4
	1	.440	1/2	3	810-306	810-306-1	810-306-4
	1-1/8	.495	1/2	3	810-308	810-308-1	810-308-4
	1-3/8	.605	1/2	3-1/2	810-310	810-310-1	810-310-4
	1-5/8	.715	1/2	4	810-312	810-312-1	810-312-4
5/8	2-1/4	.990	5/8	5	810-314	810-314-1	810-314-4
3/4	1-7/8	.825	3/4	4	810-316	810-316-1	810-316-4


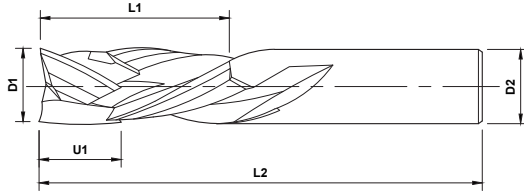
PowerNR Coating Available

3 FLUTE COMPRESSION



3 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique right and left fluting, controls finish on both sides of work-piece
- Effective for wide range of materials
- MAP certified quality



Standard, Series 818



OD	LOC	Upcut	SHK	OAL	Uncoated		PowerA		PowerZ	
					Standard	Mortise	Standard	Mortise	Standard	Mortise
3/8	7/8	.200	3/8	3	-	818-202	-	818-202-1	-	818-202-4
	1-1/8	.495	3/8	3	818-002	-	818-002-1	-	818-002-4	-
1/2	7/8	.200	1/2	3	-	818-204	-	818-204-1	-	818-204-4
	1-1/8	.495	1/2	3	818-004	-	818-004-1	-	818-004-4	-
	1-3/8	.200	1/2	3-1/2	-	818-206	-	818-206-1	-	818-206-4
	1-5/8	.715	1/2	3-1/2	818-006	-	818-006-1	-	818-006-4	-
3/4	2	.200	3/4	4	-	818-208	-	818-208-1	-	818-208-4
	2	.880	3/4	4	818-008	-	818-008-1	-	818-008-4	-


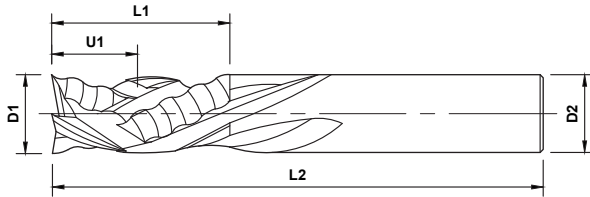
PowerNR Coating Available

4 FLUTE COMBINATION COMPRESSION



4 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique right and left fluting, controls finish on both sides of work-piece
- Effective for wide range of materials
- MAP certified quality



Standard, Series 820

High Performance Routers



OD	LOC	Upcut	SHK	OAL	Uncoated	PowerA	PowerZ
D1	L1	U1	D2	L2	Standard	Standard	Standard
1/2	1	.440	1/2	3	820-202	820-202-1	820-202-4
	1-1/8	.495	1/2	3	820-204	820-204-1	820-204-4
	1-3/8	.605	1/2	3-1/2	820-206	820-206-1	820-206-4
	1-5/8	.715	1/2	4	820-208	820-208-1	820-208-4
5/8	2-1/4	.990	5/8	5	820-210	820-210-1	820-210-4
3/4	1-7/8	.825	3/4	4	820-212	820-212-1	820-212-4
	2-1/2	1.100	3/4	5	820-214	820-214-1	820-214-4


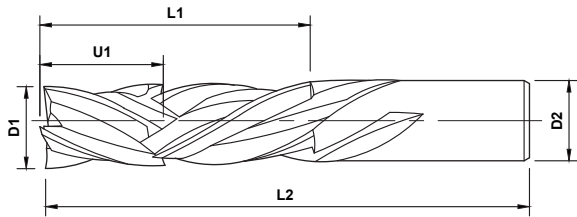
PowerNR Coating Available

4 FLUTE COMPRESSION



4 Flutes • Coated and Uncoated

- High Performance A-Gr-SiV submicron grain carbide
- Unique right and left fluting, controls finish on both sides of work-piece
- Effective for wide range of materials
- MAP certified quality



Standard, Series 821




OD	LOC	Upcut	SHK	OAL	Uncoated		PowerA		PowerZ	
					Standard	Mortise	Standard	Mortise	Standard	Mortise
1/2	7/8	.200	1/2	3	-	821-102	-	821-102-1	-	821-102-4
	1	.440	1/2	3	821-002	-	821-002-1	-	821-002-4	-
	1-1/8	.495	1/2	3	821-004	-	821-004-1	-	821-004-4	-
	1-3/8	.200	1/2	3-1/2	-	821-104	-	821-104-1	-	821-104-4
	1-3/8	.605	1/2	3-1/2	821-006	-	821-006-1	-	821-006-4	-
	1-5/8	.715	1/2	4	821-008	-	821-008-1	-	821-008-4	-
5/8	2-1/4	.990	5/8	5	821-010	-	821-010-1	-	821-010-4	-
3/4	1-7/8	.825	3/4	4	821-012	-	821-012-1	-	821-012-4	-
	2-1/2	1.100	3/4	5	821-014	-	821-014-1	-	821-014-4	-

4 FLUTE FIBERGLASS MILL END ROUTER



4 Flutes • Coated and Uncoated

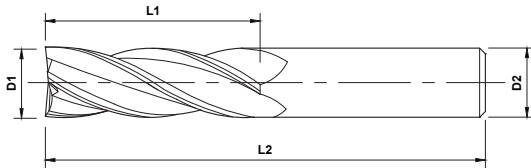- High Performance A-Gr-SiV submicron grain carbide
- design for superb edge quality
- MAP certified quality



FIBERGLASS APPLICATIONS

Note: Please see the bur section of our catalog for additional fiberglass router selections.



Standard, Series 819

High Performance Routers

Fiberglass


OD	LOC	SHK	OAL	Uncoated		PowerA		PowerZ	
D1	L1	D2	L2	Upcut	Downcut	Upcut	Downcut	Upcut	Downcut
3/8	5/8	3/8	3	819-202	819-302	819-202-1	819-302-1	819-202-4	819-302-4
	1-1/8	3/8	3	819-204	819-304	819-204-1	819-304-1	819-204-4	819-304-4
1/2	5/8	1/2	3-1/2	819-206	819-306	819-206-1	819-306-1	819-206-4	819-306-4
	1-1/8	1/2	3-1/2	819-208	819-308	819-208-1	819-308-1	819-208-4	819-308-4

FIBERGLASS AND COMPOSITE FINISHERS



0 Flute, 2 Flute, and 2/5 Aramid Style

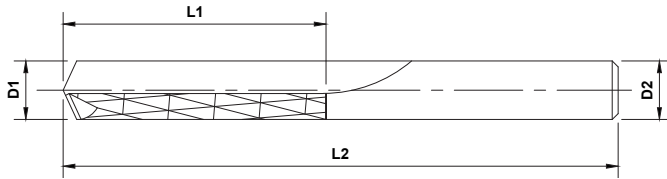- High Performance A-Gr-SiV submicron grain carbide
- Fast removal and superb finish in fiberglass
- MAP certified quality



FIBERGLASS APPLICATIONS

Note: Please see the bur section of our catalog for additional fiberglass router selections.



Standard, Series 822 - 0 Flute



Standard, Series 822 - 2 Flute



Standard, Series 822 - 2/5 Aramid

Fiberglass

OD	LOC	SHK	OAL	Standard	Standard	Aramid
D1	L1	D2	L2	0 Flute	2 Flute	2/5 Flute
1/4	3/4	1/4	2-1/2	822-102	822-104	822-106
	1	1/4	3	822-108	-	-
3/8	7/8	3/8	2-1/2	822-110	822-112	822-114
1/2	1	1/2	3	822-116	822-118	822-120

OFX O-FLUTE EXTREME ROUTERS

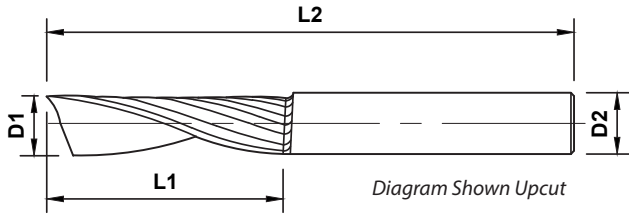


High Polish • Upcut and Downcut


- High Performance A-Gr-SiV submicron grain carbide
- Polished flute for superior edge quality
- MAP certified quality
- Great on acrylics

OFX

Please contact us for
our full line of
router products



Standard, Series 823
Photo Shown Downcut




Standard, Series 823, PowerN
Photo Shown Downcut




OD	LOC	SHK	OAL	Upcut		Downcut	
D1	L1	D2	L2	Uncoated	PowerN	Uncoated	PowerN
1/16	1/4	1/8	2	823-002	823-002-5	823-102	823-102-5
1/8	1/4	1/8	2	823-004	823-004-5	823-104	823-104-5
	1/4	1/4	2	823-006	823-006-5	823-106	823-106-5
	1/2	1/8	2	823-008	823-008-5	823-108	823-108-5
	1/2	1/4	2	823-010	823-010-5	823-110	823-110-5
5/32	9/16	1/4	2	823-012	823-012-5	823-112	823-112-5
3/16	3/8	3/16	2	823-014	823-014-5	823-114	823-114-5
	5/8	3/16	2	823-016	823-016-5	823-116	823-116-5
	3/8	1/4	2	823-018	823-018-5	823-118	823-118-5
	1/2	1/4	2	823-020	823-020-5	823-120	823-120-5
	5/8	1/4	2	823-022	823-022-5	823-122	823-122-5
	7/8	1/4	2-1/2	823-042	823-042-5	823-142	823-142-5
	1-1/4	1/4	3	823-040	823-040-5	823-140	823-140-5
7/32	3/4	1/4	2-1/2	823-024	823-024-5	823-124	823-124-5
1/4	5/8	1/4	2	823-026	823-026-5	823-126	823-126-5
	3/4	1/4	2-1/2	823-028	823-028-5	823-128	823-128-5
	1-1/4	1/4	3	823-030	823-030-5	823-130	823-130-5
3/8	1-1/8	3/8	3	823-032	823-032-5	823-132	823-132-5
1/2	1	1/2	3	823-034	823-034-5	823-134	823-134-5
	2	1/2	4	823-036	823-036-5	823-136	823-136-5

FINE PITCH NICKED NANO ROUTERS



6 -16 Flutes • Diamond Coated • Fine Pitched Nicked

- High Performance A-Gr-SiV submicron grain carbide
- Excellent performance on carbon graphite and carbon fiber panels



CVD Real Diamond Coated




Standard, Series 824



OD	LOC	SHK	OAL	Flutes	PowerRD		
					Plain End	Bur End	Mill End
1/8	1/4	1/8	1-1/2	6	824-002-7	824-102-7	824-202-7
	3/8	1/8	1-1/2	6	824-004-7	824-104-7	824-204-7
	1/2	1/8	1-1/2	8	824-006-7	824-106-7	824-206-7
3/16	3/8	3/16	2	6	824-008-7	824-108-7	824-208-7
	9/16	3/16	2	6	824-010-7	824-110-7	824-210-7
	3/4	3/16	2	8	824-012-7	824-112-7	824-212-7
1/4	1/2	1/4	2-1/2	8	824-014-7	824-114-7	824-214-7
	3/4	1/4	2-1/2	10	824-016-7	824-116-7	824-216-7
	1	1/4	3	10	824-018-7	824-118-7	824-218-7
	1-1/4	1/4	4	12	824-020-7	824-120-7	824-220-7
5/16	1	5/16	2-1/2	10	824-022-7	824-122-7	824-222-7
3/8	3/4	3/8	2-1/2	12	824-024-7	824-124-7	824-224-7
	1-1/8	3/8	3	12	824-026-7	824-126-7	824-226-7
	1-1/2	3/8	4	12	824-028-7	824-128-7	824-228-7
	2	3/8	4	12	824-030-7	824-130-7	824-230-7
1/2	1	1/2	3	14	824-032-7	824-132-7	824-232-7
	2	1/2	4	16	824-034-7	824-134-7	824-234-7


HERRINGBONE COMPOSITE SURFACE FINISHER



4 Flutes • Diamond Coated • Fine Pitched Nicked

- High Performance A-Gr-SiV submicron grain carbide
- Excellent performance on carbon graphite and carbon fiber panels

CVD Real Diamond Coated




Standard, Series 825



OD	LOC	SHK	OAL	PowerRD
D1	L1	D2	L2	
1/8	3/8	1/8	1-1/2	825-002-7
1/4	3/4	1/4	2-1/2	825-004-7
3/8	1-1/8	3/8	3	825-006-7
1/2	1-1/8	1/2	3	825-008-7

COMPOSITE ROUGHER/SEMI-FINISHER



4-8 Flutes • Diamond Coated

- High Performance A-Gr-SiV submicron grain carbide
- Excellent performance on carbon graphite and carbon fiber panels

CVD Real Diamond Coated



Standard, Series 826



OD	LOC	SHK	OAL	Flutes	PowerRD
D1	L1	D2	L2		
15/64	3/4	1/4	2-1/2	4	826-002-7
1/4	1/2	1/4	2-1/2	4	826-004-7
	3/4	1/4	2-1/2	4	826-006-7
11/32	1-1/8	3/8	3	6	826-008-7
23/64	1-1/8	3/8	3	6	826-010-7
3/8	3/4	3/8	3	6	826-012-7
	1-1/2	3/8	3	6	826-014-7
7/16	1-1/2	1/2	3	8	826-016-7
31/64	1-1/2	1/2	3	8	826-018-7
1/2	1	1/2	3	8	826-020-7
	1-1/2	1/2	3	8	826-022-7

COMPOSITE FINISHER



8-14 Flutes • Diamond Coated

- High Performance A-Gr-SiV submicron grain carbide
- Excellent performance on carbon graphite and carbon fiber panels
- MAP certified quality

CVD Real Diamond Coated




Standard, Series 827



OD	LOC	SHK	OAL	Flutes	PowerRD
D1	L1	D2	L2		
1/4	3/4	1/4	2-1/2	8	827-002-7
	1	1/4	3	8	827-004-7
3/8	1-1/8	3/8	3	12	827-006-7
	1-1/2	3/8	3	12	827-008-7
1/2	1-1/2	1/2	4	14	827-010-7
	2	1/2	4	14	827-012-7

CARBIDE DRILLS

- **Jobber Drills**
- **Stub Drills**
- **Straight Flute Drills**
- **Spade Drills**
- **Spotting Drills**
- **Drill and Countersink**
- **Multiple Flute Countersinks**
- **Chamfer Tools**



Mastercut's Superior Carbide Blend – *A-Gr-SiV* (Active Grain Sized Volume)

Our superior tungsten carbide gives you the ability to be *aggressive* when you need to be. Growth inhibitors in our submicron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.














TABLE OF CONTENTS







	Jobber Drills	124	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Stub Drills.	129	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Straight Flute Drills	133	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Spade Drills.	134	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	NC Spotting Drills	135	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Drill and Countersink/ Center Drills	135	Cermet	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Countersinks, Single Flute	136			Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Countersinks, Three Flute	136			Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Countersinks, Six Flute	137			Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
	Chamfer Tools	137	Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P	

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized Volume)

Our superior tungsten carbide gives you the ability to be *aggressive* when you need to be. Growth inhibitors in our submicron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

See Reamers and Threadmills pages for additional tools.

Features Legend


	2 Flutes		6 Flutes
	3 Flutes		Plain shank
	4 Flutes		Double End Square

Coatings Legend

	PowerA Coating
---	----------------


Please contact us for our full line of metric products.

JOBBER DRILLS



2 Flute 118° Four Facet Point • 3 Flute 130° High Performance Point • Coated and Uncoated

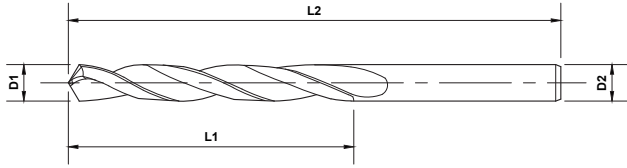- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality



Series 601 - 2 Flute




Series 601 - 3 Flute



OD	LOC	SHK	OAL	Wire	Uncoated		PowerA	
					2 Flute	3 Flute	2 Flute	3 Flute
D1	L1	D2	L2	Letter				
.0280	5/16	.0280	1-1/4	70	601-002*	-	601-002-1*	-
.0292	5/16	.0292	1-1/4	69	601-004*	-	601-004-1*	-
.0310	5/16	.0310	1-1/4	68	601-006*	-	601-006-1*	-
1/32	5/16	1/32	1-1/4		601-008*	-	601-008-1*	-
.0320	5/16	.0320	1-1/4	67	601-010*	-	601-010-1*	-
.0330	5/16	.0330	1-1/4	66	601-012*	-	601-012-1*	-
.0350	5/8	.0350	1-3/8	65	601-014*	-	601-014-1*	-
.0360	5/8	.0360	1-3/8	64	601-016*	-	601-016-1*	-
.0370	5/8	.0370	1-3/8	63	601-018*	-	601-018-1*	-
.0380	5/8	.0380	1-3/8	62	601-020*	-	601-020-1*	-
.0390	5/8	.0390	1-3/8	61	601-022*	-	601-022-1*	-
.0394	5/8	.0394	1-1/2		601-024*	-	601-024-1*	-
.0400	3/4	.0400	1-1/2	60	601-026*	-	601-026-1*	-
.0410	3/4	.0410	1-1/2	59	601-028*	-	601-028-1*	-
.0420	3/4	.0420	1-1/2	58	601-030*	-	601-030-1*	-
.0430	3/4	.0430	1-1/2	57	601-032*	-	601-032-1*	-
.0465	3/4	.0465	1-1/2	56	601-034*	-	601-034-1*	-
3/64	3/4	3/64	1-1/2		601-036*	-	601-036-1*	-
.0520	3/4	.0520	1-1/2	55	601-038*	-	601-038-1*	-
.0550	3/4	.0550	1-1/2	54	601-040*	-	601-040-1*	-
.0591	3/4	.0591	1-1/2		601-042*	-	601-042-1*	-
.0595	3/4	.0595	1-1/2	53	601-044*	-	601-044-1*	-
1/16	3/4	1/16	1-1/2		601-046	-	601-046-1	-
.0635	3/4	.0635	1-1/2	52	601-048	-	601-048-1	-


* 135° Helix Angle

JOBBER DRILLS



2 Flute 118° Four Facet Point • 3 Flute 130° High Performance Point • Coated and Uncoated

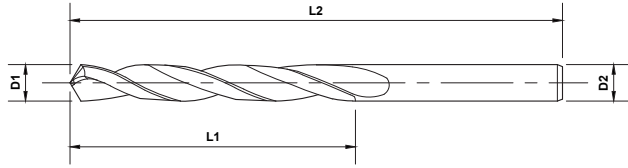- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality



OD	LOC	SHK	OAL	Wire	Uncoated		PowerA	
					2 Flute	3 Flute	2 Flute	3 Flute
D1	L1	D2	L2	Letter				
.0670	3/4	.0670	1-1/2	51	601-050	-	601-050-1	-
.0700	7/8	.0700	1-3/4	50	601-052	-	601-052-1	-
.0730	7/8	.0730	1-3/4	49	601-054	-	601-054-1	-
.0760	7/8	.0760	1-3/4	48	601-056	-	601-056-1	-
5/64	7/8	5/64	1-3/4		601-058	-	601-058-1	-
.0785	7/8	.0785	1-3/4	47	601-060	-	601-060-1	-
.0787	7/8	.0787	1-3/4		601-062	-	601-062-1	-
.0810	7/8	.0810	1-3/4	46	601-064	-	601-064-1	-
.0820	7/8	.0820	1-3/4	45	601-066	-	601-066-1	-
.0860	1	.0860	2	44	601-068	-	601-068-1	-
.0890	1	.0890	2	43	601-070	-	601-070-1	-
.0935	1	.0935	2	42	601-072	-	601-072-1	-
3/32	1	3/32	2		601-074	-	601-074-1	-
.0960	1	.0960	2	41	601-076	-	601-076-1	-
.0980	1	.0980	2	40	601-078	-	601-078-1	-
.0984	1	.0984	2		601-080	-	601-080-1	-
.0995	1-1/4	.0995	2-1/4	39	601-082	-	601-082-1	-
.1015	1-1/4	.1015	2-1/4	38	601-084	-	601-084-1	-
.1040	1-1/4	.1040	2-1/4	37	601-086	-	601-086-1	-
.1065	1-1/4	.1065	2-1/4	36	601-088	-	601-088-1	-
7/64	1-1/4	7/64	2-1/4		601-090	-	601-090-1	-
.1100	1-1/4	.1100	2-1/4	35	601-092	-	601-092-1	-
.1110	1-1/4	.1110	2-1/4	34	601-094	-	601-094-1	-
.1130	1-1/4	.1130	2-1/4	33	601-096	-	601-096-1	-
.1160	1-1/4	.1160	2-1/4	32	601-098	-	601-098-1	-
.1181	1-1/4	.1181	2-1/4		601-100	-	601-100-1	-
.1200	1-1/4	.1200	2-1/4	31	601-102	-	601-102-1	-
1/8	1-1/4	1/8	2-1/4		601-104	601-504	601-104-1	601-504-1
.1285	1-3/8	.1285	2-1/2	30	601-106	601-506	601-106-1	601-506-1
.1360	1-3/8	.1360	2-1/2	29	601-108	601-508	601-108-1	601-508-1
.1378	1-3/8	.1378	2-1/2		601-110	601-510	601-110-1	601-510-1
.1405	1-3/8	.1405	2-1/2	28	601-112	601-512	601-112-1	601-512-1
9/64	1-3/8	9/64	2-1/2		601-114	601-514	601-114-1	601-514-1
.1440	1-3/8	.1440	2-1/2	27	601-116	601-516	601-116-1	601-516-1


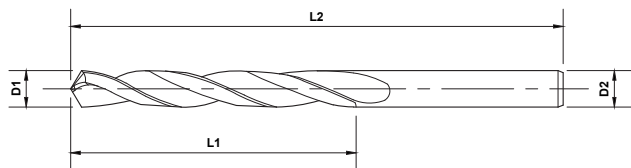
Carbide Drills

JOBBER DRILLS




2 Flute 118° Four Facet Point • 3 Flute 130° High Performance Point • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality





OD D1	LOC L1	SHK D2	OAL L2	Wire Letter	Uncoated		PowerA	
					2 Flute	3 Flute	2 Flute	3 Flute
.1470	1-3/8	.1470	2-1/2	26	601-118	601-518	601-118-1	601-518-1
.1495	1-3/8	.1495	2-1/2	25	601-120	601-520	601-120-1	601-520-1
.1520	1-3/8	.1520	2-1/2	24	601-122	601-522	601-122-1	601-522-1
.1540	1-3/8	.1540	2-1/2	23	601-124	601-524	601-124-1	601-524-1
5/32	1-3/8	5/32	2-1/2		601-126	601-526	601-126-1	601-526-1
.1570	1-3/8	.1570	2-1/2	22	601-128	601-528	601-128-1	601-528-1
.1575	1-3/8	.1575	2-1/2		601-130	601-530	601-130-1	601-530-1
.1590	1-3/8	.1590	2-1/2	21	601-132	601-532	601-132-1	601-532-1
.1610	1-3/8	.1610	2-1/2	20	601-134	601-534	601-134-1	601-534-1
.1660	1-5/8	.1660	2-3/4	19	601-136	601-536	601-136-1	601-536-1
.1695	1-5/8	.1695	2-3/4	18	601-138	601-538	601-138-1	601-538-1
11/64	1-5/8	11/64	2-3/4		601-140	601-540	601-140-1	601-540-1
.1730	1-5/8	.1730	2-3/4	17	601-142	601-542	601-142-1	601-542-1
.1770	1-5/8	.1770	2-3/4	16	601-144	601-544	601-144-1	601-544-1
.1772	1-5/8	.1772	2-3/4		601-146	601-546	601-146-1	601-546-1
.1800	1-5/8	.1800	2-3/4	15	601-148	601-548	601-148-1	601-548-1
.1820	1-5/8	.1820	2-3/4	14	601-150	601-550	601-150-1	601-550-1
.1850	1-5/8	.1850	2-3/4	13	601-152	601-552	601-152-1	601-552-1
3/16	1-5/8	3/16	2-3/4		601-154	601-554	601-154-1	601-554-1
.1890	1-5/8	.1890	2-3/4	12	601-156	601-556	601-156-1	601-556-1
.1910	1-5/8	.1910	2-3/4	11	601-158	601-558	601-158-1	601-558-1
.1935	1-5/8	.1935	2-3/4	10	601-160	601-560	601-160-1	601-560-1
.1960	1-3/4	.1960	3	9	601-162	601-562	601-162-1	601-562-1
.1968	1-3/4	.1968	3		601-164	601-564	601-164-1	601-564-1
.1990	1-3/4	.1990	3	8	601-166	601-566	601-166-1	601-566-1
.2010	1-3/4	.2010	3	7	601-168	601-568	601-168-1	601-568-1
13/64	1-3/4	13/64	3		601-170	601-570	601-170-1	601-570-1
.2040	1-3/4	.2040	3	6	601-172	601-572	601-172-1	601-572-1
.2055	1-3/4	.2055	3	5	601-174	601-574	601-174-1	601-574-1
.2090	1-3/4	.2090	3	4	601-176	601-576	601-176-1	601-576-1
.2130	1-3/4	.2130	3	3	601-178	601-578	601-178-1	601-578-1
.2165	1-3/4	.2165	3		601-180	601-580	601-180-1	601-580-1
7/32	1-3/4	7/32	3		601-182	601-582	601-182-1	601-582-1
.2210	1-3/4	.2210	3	2	601-184	601-584	601-184-1	601-584-1

JOBBER DRILLS



2 Flute 118° Four Facet Point • 3 Flute 130° High Performance Point • Coated and Uncoated

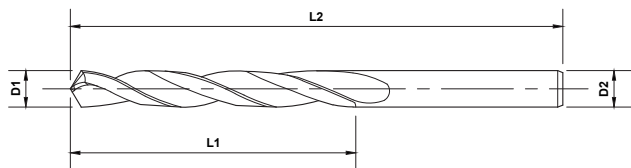- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality



OD	LOC	SHK	OAL	Wire	Uncoated		PowerA	
D1	L1	D2	L2	Letter	2 Flute	3 Flute	2 Flute	3 Flute
.2280	1-3/4	.2280	3	I	601-186	601-586	601-186-1	601-586-1
.2340	2	.2340	3-1/4	A	601-188	601-588	601-188-1	601-588-1
15/64	2	15/64	3-1/4		601-190	601-590	601-190-1	601-590-1
.2362	2	.2362	3-1/4		601-192	601-592	601-192-1	601-592-1
.2380	2	.2380	3-1/4	B	601-194	601-594	601-194-1	601-594-1
.2420	2	.2420	3-1/4	C	601-196	601-596	601-196-1	601-596-1
.2460	2	.2460	3-1/4	D	601-198	601-598	601-198-1	601-598-1
1/4	2	1/4	3-1/4	E	601-200	601-600	601-200-1	601-600-1
.2559	2	.2559	3-1/4		601-202	601-602	601-202-1	601-602-1
.2570	2	.2570	3-1/4	F	601-204	601-604	601-204-1	601-604-1
.2610	2-1/8	.2610	3-1/2	G	601-206	601-606	601-206-1	601-606-1
17/64	2-1/8	17/64	3-1/2		601-208	601-608	601-208-1	601-608-1
.2660	2-1/8	.2660	3-1/2	H	601-210	601-610	601-210-1	601-610-1
.2720	2-1/8	.2720	3-1/2	I	601-212	601-612	601-212-1	601-612-1
.2756	2-1/8	.2756	3-1/2		601-214	601-614	601-214-1	601-614-1
.2770	2-1/8	.2770	3-1/2	J	601-216	601-616	601-216-1	601-616-1
.2810	2-1/8	.2810	3-1/2	K	601-218	601-618	601-218-1	601-618-1
9/32	2-1/8	9/32	3-1/2		601-220	601-620	601-220-1	601-620-1
.2900	2-1/8	.2900	3-1/2	L	601-222	601-622	601-222-1	601-622-1
.2950	2-3/8	.2950	4	M	601-224	601-624	601-224-1	601-624-1
.2953	2-3/8	.2953	4		601-226	601-626	601-226-1	601-626-1
19/64	2-3/8	19/64	4		601-228	601-628	601-228-1	601-628-1
.3020	2-3/8	.3020	4	N	601-230	601-630	601-230-1	601-630-1
5/16	2-3/8	5/16	4		601-232	601-632	601-232-1	601-632-1
.3150	2-3/8	.3150	4		601-234	601-634	601-234-1	601-634-1
.3160	2-3/8	.3160	4	O	601-236	601-636	601-236-1	601-636-1
.3230	2-3/8	.3230	4	P	601-238	601-638	601-238-1	601-638-1
21/64	2-3/8	21/64	4		601-240	601-640	601-240-1	601-640-1
.3320	2-3/8	.3320	4	Q	601-242	601-642	601-242-1	601-642-1
.3346	2-3/8	.3346	4		601-244	601-644	601-244-1	601-644-1
.3390	2-3/8	.3390	4	R	601-246	601-646	601-246-1	601-646-1
11/32	2-3/8	11/32	4		601-248	601-648	601-248-1	601-648-1
.3480	2-3/8	.3480	4	S	601-250	601-650	601-250-1	601-650-1
.3543	2-3/4	.3543	4-1/4		601-252	601-652	601-252-1	601-652-1


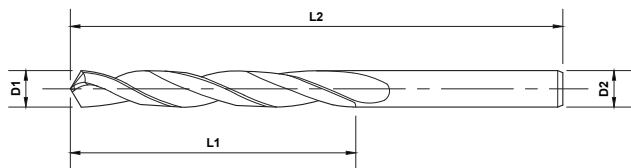
Carbide Drills

JOBBER DRILLS




2 Flute 118° Four Facet Point • 3 Flute 130° High Performance Point • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality




OD	LOC	SHK	OAL	Wire	Uncoated		PowerA	
D1	L1	D2	L2	Letter	2 Flute	3 Flute	2 Flute	3 Flute
.3580	2-3/4	.3580	4-1/4	T	601-254	601-654	601-254-1	601-654-1
23/64	2-3/4	23/64	4-1/4		601-256	601-656	601-256-1	601-656-1
.3680	2-3/4	.3680	4-1/4	U	601-258	601-658	601-258-1	601-658-1
.3740	2-3/4	.3740	4-1/4		601-260	601-660	601-260-1	601-660-1
3/8	2-3/4	3/8	4-1/4		601-262	601-662	601-262-1	601-662-1
.3770	2-3/4	.3770	4-1/4	V	601-264	601-664	601-264-1	601-664-1
.3860	2-7/8	.3860	4-1/2	W	601-266	601-666	601-266-1	601-666-1
25/64	2-7/8	25/64	4-1/2		601-268	601-668	601-268-1	601-668-1
.3937	2-7/8	.3937	4-1/2		601-270	601-670	601-270-1	601-670-1
.3970	2-7/8	.3970	4-1/2	X	601-272	601-672	601-272-1	601-672-1
.4040	2-7/8	.4040	4-1/2	Y	601-274	601-674	601-274-1	601-674-1
13/32	2-7/8	13/32	4-1/2		601-276	601-676	601-276-1	601-676-1
.4130	2-7/8	.4130	4-1/2	Z	601-278	601-678	601-278-1	601-678-1
.4134	2-7/8	.4134	4-1/2		601-280	601-680	601-280-1	601-680-1
27/64	2-7/8	27/64	4-1/2		601-282	601-682	601-282-1	601-682-1
.4331	2-7/8	.4331	4-1/2		601-284	601-684	601-284-1	601-684-1
7/16	2-7/8	7/16	4-1/2		601-286	601-686	601-286-1	601-686-1
.4527	3	.4527	4-3/4		601-288	601-688	601-288-1	601-688-1
29/64	3	29/64	4-3/4		601-290	601-690	601-290-1	601-690-1
15/32	3	15/32	4-3/4		601-292	601-692	601-292-1	601-692-1
.4724	3	.4724	4-3/4		601-294	601-694	601-294-1	601-694-1
31/64	3	31/64	4-3/4		601-296	601-696	601-296-1	601-696-1
.4921	3	.4921	4-3/4		601-298	601-698	601-298-1	601-698-1
1/2	3	1/2	4-3/4		601-300	601-700	601-300-1	601-700-1
17/32	4	17/32	6		601-302	601-702	601-302-1	601-702-1
9/16	4	9/16	6		601-304	601-704	601-304-1	601-704-1
19/32	4	19/32	6		601-306	601-706	601-306-1	601-706-1
5/8	4	5/8	6		601-308	601-708	601-308-1	601-708-1
21/32	4	21/32	6		601-310	601-710	601-310-1	601-710-1
11/16	4	11/16	6		601-312	601-712	601-312-1	601-712-1
23/32	4	23/32	6		601-314	601-714	601-314-1	601-714-1
3/4	4	3/4	6		601-316	601-716	601-316-1	601-716-1
25/32	4	25/32	6		601-318	-	601-318-1	-
7/8	4	7/8	6		601-320	601-720	601-320-1	601-720-1
1	4	1	6		601-322	601-722	601-322-1	601-722-1

STUB DRILLS



2 Flute • 135° & 118° Four Facet Point • Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality




Stub, Series 603

Carbide Drills




OD	LOC	SHK	OAL	Wire	Point	Uncoated
D1	L1	D2	L2	Letter	Angle	2 Flute
.0465	1/2	.0465	1-1/2	#56	135°	603-002
3/64	1/2	3/64	1-1/2		135°	603-004
.0520	1/2	.0520	1-1/2	#55	135°	603-006
.0550	1/2	.0550	1-1/2	#54	135°	603-008
.0595	1/2	.0595	1-1/2	#53	135°	603-010
1/16	5/8	1/16	2		118°	603-012
.0635	5/8	.0635	2	#52	118°	603-014
.0670	5/8	.0670	2	#51	118°	603-016
.0700	5/8	.0700	2	#50	118°	603-018
.0730	5/8	.0730	2	#49	118°	603-020
.0760	5/8	.0760	2	#48	118°	603-022
5/64	5/8	5/64	2		118°	603-024
.0785	5/8	.0785	2	#47	118°	603-026
.0810	5/8	.0810	2	#46	118°	603-028
.0820	5/8	.0820	2	#45	118°	603-030
.0860	5/8	.0860	2	#44	118°	603-032
.0890	5/8	.0890	2	#43	118°	603-034
.0935	5/8	.0935	2	#42	118°	603-036

STUB DRILLS




2 Flute • 135° & 118° Four Facet Point • Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality




OD	LOC	SHK	OAL	Wire	Point	Uncoated
D1	L1	D2	L2	Letter	Angle	2 Flute
3/32	5/8	3/32	2		118°	603-038
.0960	5/8	.0960	2	#41	118°	603-040
.0980	5/8	.0980	2	#40	118°	603-042
.0995	5/8	.0995	2	#39	118°	603-044
.1015	5/8	.1015	2	#38	118°	603-046
.1040	5/8	.1040	2	#37	118°	603-048
.1065	5/8	.1065	2		118°	603-050
7/64	5/8	7/64	2		118°	603-052
.1100	5/8	.1100	2	#35	118°	603-054
.1110	5/8	.1110	2	#34	118°	603-056
.1130	5/8	.1130	2	#33	118°	603-058
.1160	5/8	.1160	2	#32	118°	603-060
.1200	5/8	.1200	2	#31	118°	603-062
1/8	5/8	1/8	2		118°	603-064
.1285	5/8	.1285	2	#30	118°	603-066
.1360	5/8	.1360	2		118°	603-068
.1405	5/8	.1405	2	#28	118°	603-070
9/64	5/8	9/64	2		118°	603-072
.1440	5/8	.1440	2	#27	118°	603-074
.1470	5/8	.1470	2	#26	118°	603-076
.1495	3/4	.1495	2-1/2		118°	603-078
.1520	3/4	.1520	2-1/2	#24	118°	603-080
.1540	3/4	.1540	2-1/2	#23	118°	603-082
5/32	3/4	5/32	2-1/2		118°	603-084
.1570	3/4	.1570	2-1/2		118°	603-086
.1590	3/4	.1590	2-1/2	#21	118°	603-088
.1610	3/4	.1610	2-1/2	#20	118°	603-090
.1660	3/4	.1660	2-1/2	#19	118°	603-092
.1695	3/4	.1695	2-1/2	#18	118°	603-094
11/64	3/4	11/64	2-1/2		118°	603-096
.1730	3/4	.1730	2-1/2	#17	118°	603-098
.1770	3/4	.1770	2-1/2	#16	118°	603-100
.1800	3/4	.1800	2-1/2	#15	118°	603-102


STUB DRILLS



2 Flute • 135° & 118° Four Facet Point • Uncoated




- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality



OD	LOC	SHK	OAL	Wire	Point	Uncoated
D1	L1	D2	L2	Letter	Angle	2 Flute
.1820	3/4	.1820	2-1/2	#14	118°	603-104
.1850	3/4	.1850	2-1/2	#13	118°	603-106
3/16	3/4	3/16	2-1/2		118°	603-108
.1890	3/4	.1890	2-1/2	#12	118°	603-110
.1910	3/4	.1910	2-1/2	#11	118°	603-112
.1935	3/4	.1935	2-1/2	#10	118°	603-114
.1960	3/4	.1960	2-1/2	#9	118°	603-116
.1990	3/4	.1990	2-1/2	#8	118°	603-118
.2010	3/4	.2010	2-1/2	#7	118°	603-120
13/64	3/4	13/64	2-1/2		118°	603-122
.2040	3/4	.2040	2-1/2	#6	118°	603-124
.2055	3/4	.2055	2-1/2	#5	118°	603-126
.2090	3/4	.2090	2-1/2	#4	118°	603-128
.2130	1	.2130	2-1/2		118°	603-130
7/32	1	7/32	2-1/2		118°	603-132
.2210	1	.2210	2-1/2	#2	118°	603-134
.2280	1	.2280	2-1/2	#1	118°	603-136
.2340	1	.2340	2-1/2	A	118°	603-138
15/64	1	15/64	2-1/2		118°	603-140
.2380	1	.2380	2-1/2	B	118°	603-142
.2420	1	.2420	2-1/2	C	118°	603-144
.2460	1	.2460	2-1/2	D	118°	603-146
1/4	1	1/4	2-1/2		118°	603-148
.2570	1	.2570	2-1/2		118°	603-150
.2610	1	.2610	2-1/2	G	118°	603-152
17/64	1	17/64	2-1/2		118°	603-154
.2660	1	.2660	2-1/2	H	118°	603-156
.2720	1	.2720	2-1/2		118°	603-158
.2786	1-1/4	.2756	2-1/2		118°	603-160
.2770	1	.2770	2-1/2	J	118°	603-162
.2810	1	.2810	2-1/2	K	118°	603-164
9/32	1	9/32	2-1/2		118°	603-166
.2900	1	.2900	2-1/2	L	118°	603-168


Carbide Drills

STUB DRILLS




2 Flute • 135° & 118° Four Facet Point • Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality




OD	LOC	SHK	OAL	Wire	Point	Uncoated
D1	L1	D2	L2	Letter	Angle	2 Flute
.2950	1	.2950	2-1/2	M	118°	603-170
19/64	1-1/4	19/64	2-3/4		118°	603-172
.3020	1-1/4	.3020	3	N	118°	603-174
5/16	1-1/4	5/16	2-3/4		118°	603-176
.3160	1-1/4	.3160	3	O	118°	603-178
.3230	1-1/4	.3230	3	P	118°	603-180
21/64	1-1/4	21/64	2-3/4		118°	603-182
.3320	1-1/4	.3320	3	Q	118°	603-184
.3390	1-1/4	.3390	3	R	118°	603-186
11/32	1-1/4	11/32	3		118°	603-188
.3480	1-1/4	.3480	3	S	118°	603-190
.3580	1-1/4	.3580	3	T	118°	603-192
23/64	1-1/4	23/64	3		118°	603-194
.3680	1-1/4	.3680	3	U	118°	603-196
3/8	1-1/4	3/8	3		118°	603-198
.3770	1-1/4	.3770	3	V	118°	603-200
.3860	1-1/4	.3860	3	W	118°	603-202
25/64	1-1/4	25/64	3		118°	603-204
.3970	1-1/4	.3970	3	X	118°	603-206
.4040	1-1/4	.4040	3	Y	118°	603-208
13/32	1-1/4	13/32	3		118°	603-210
.4130	1-1/4	.4130	3		118°	603-212
27/64	1-1/4	27/64	3		118°	603-214
7/16	1-1/4	7/16	3		118°	603-216
29/64	1-1/4	29/64	3		118°	603-218
15/32	1-1/4	15/32	3		118°	603-220
31/64	1-1/4	31/64	3		118°	603-222
1/2	1-1/4	1/2	3		118°	603-224
9/16	1-1/4	9/16	3-1/2		118°	603-226
5/8	1-1/2	5/8	3-1/2		118°	603-228
3/4	1-1/2	3/4	4		118°	603-230

STRAIGHT FLUTE DRILLS



2 Flute • Coated and Uncoated • Point Angle 135°

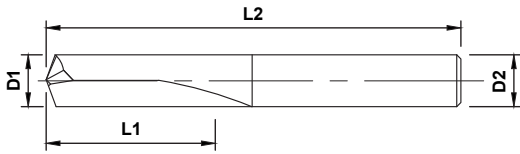- Genuine A-Gr-SiV submicron grain carbide
- Superb performance in hardened materials
- MAP certified quality




Standard, Series 604




OD	LOC	SHK	OAL	Uncoated	PowerA
D1	L1	D2	L2	2 Flute	2 Flute
3/32	1/2	3/32	1-1/2	604-002	604-002-1
1/8	5/8	1/8	1-1/2	604-004	604-004-1
9/64	5/8	9/64	2	604-006	604-006-1
5/32	5/8	5/32	2	604-008	604-008-1
11/64	5/8	11/64	2	604-010	604-010-1
3/16	5/8	3/16	2	604-012	604-012-1
13/64	3/4	13/64	2	604-014	604-014-1
7/32	3/4	7/32	2	604-016	604-016-1
15/64	3/4	15/64	2	604-018	604-018-1
1/4	3/4	1/4	2	604-020	604-020-1
17/64	3/4	17/64	2-1/2	604-022	604-022-1
9/32	3/4	9/32	2-1/2	604-024	604-024-1
19/64	3/4	19/64	2-1/2	604-026	604-026-1
5/16	3/4	5/16	2-1/2	604-028	604-028-1
21/64	1	21/64	2-1/2	604-030	604-030-1
11/32	1	11/32	2-1/2	604-032	604-032-1
23/64	1	23/64	2-1/2	604-034	604-034-1
3/8	1	3/8	2-1/2	604-036	604-036-1
25/64	1	25/64	2-3/4	604-038	604-038-1
13/32	1	13/32	2-3/4	604-040	604-040-1
27/64	1	27/64	2-3/4	604-042	604-042-1
7/16	1	7/16	2-3/4	604-044	604-044-1
29/64	1	29/64	3	604-046	604-046-1
15/32	1	15/32	3	604-048	604-048-1
31/64	1	31/64	3	604-050	604-050-1
1/2	1	1/2	3	604-052	604-052-1

SPADE DRILLS



118° Point • Coated and Uncoated

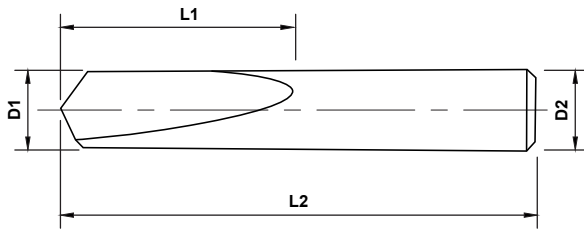- Genuine A-Gr-SiV submicron grain carbide
- Proven versatile performance
- MAP certified quality




Standard, Series 600




OD	LOC	SHK	OAL	Uncoated	PowerA
D1	L1	D2	L2		
1/16	5/16	1/16	1-1/2	600-004	600-004-1
3/32	3/8	3/32	1-1/2	600-006	600-006-1
1/8	7/16	1/8	1-1/2	600-008	600-008-1
5/32	15/32	5/32	2	600-010	600-010-1
3/16	9/16	3/16	2	600-012	600-012-1
7/32	19/32	7/32	2	600-014	600-014-1
1/4	11/16	1/4	2	600-016	600-016-1
9/32	3/4	9/32	2-1/2	600-018	600-018-1
5/16	7/8	5/16	2-1/2	600-020	600-020-1
3/8	1	3/8	2-1/2	600-022	600-022-1
7/16	1-1/4	7/16	2-1/2	600-024	600-024-1
1/2	1-3/8	1/2	2-1/2	600-026	600-026-1

NC SPOTTING DRILLS



90°, 120° and 142° • Coated and Uncoated

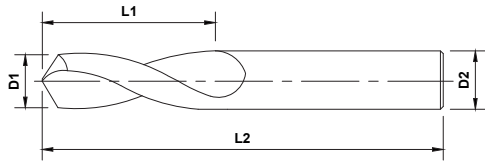- Genuine A-Gr-SiV submicron grain carbide
- Proven versatile performance
- MAP certified quality




Standard, Series 600




OD	LOC	SHK	OAL	Uncoated			PowerA		
				90°	120°	142°	90°	120°	142°
D1	L1	D2	L2						
1/8	3/8	1/8	2	600-402	600-502	600-602	600-402-1	600-502-1	600-602-1
3/16	3/4	3/16	3	600-404	600-504	600-604	600-404-1	600-504-1	600-604-1
1/4	3/4	1/4	3	600-406	600-506	600-606	600-406-1	600-506-1	600-606-1
5/16	1	5/16	2-1/2	600-408	600-508	600-608	600-408-1	600-508-1	600-608-1
3/8	1	3/8	3	600-410	600-510	600-610	600-410-1	600-510-1	600-610-1
1/2	1	1/2	4	600-412	600-512	600-612	600-412-1	600-512-1	600-612-1

Carbide Drills


DRILL AND COUNTERSINK



118° point Center Drills • 60°, 82° and 90° Countersink • Coated and Uncoated




Standard, Series 600




#	OD	LOC	SHK	OAL	Uncoated			PowerA		
					60°	82°	90°	60°	82°	90°
1	3/64	3/64	1/8	1-1/2	600-304	600-104	600-204	600-304-1	600-104-1	600-204-1
2	5/64	5/64	3/16	2	600-306	600-106	600-206	600-306-1	600-106-1	600-206-1
3	7/64	7/64	1/4	2	600-308	600-108	600-208	600-308-1	600-108-1	600-208-1
4	1/8	1/8	5/16	2-1/8	600-310	600-110	600-210	600-310-1	600-110-1	600-210-1
5	3/16	3/16	7/16	2-3/4	600-312	600-112	600-212	600-312-1	600-112-1	600-212-1
6	7/32	7/32	1/2	3	600-314	600-114	600-214	600-314-1	600-114-1	600-214-1
7	1/4	1/4	5/8	3-1/8	600-316	600-116	600-216	600-316-1	600-116-1	600-216-1
8	5/16	5/16	3/4	3-3/8	600-318	600-118	600-218	600-318-1	600-118-1	600-218-1

SINGLE FLUTE COUNTERSINKS




Single Flute • 60°, 82° and 90° • Coated and Uncoated

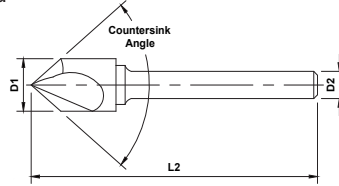- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance




Standard, Series 680




OD	SHK	OAL	Uncoated			PowerA		
			60°	82°	90°	60°	82°	90°
D1	D2	L2						
1/8	1/8	1-1/2	680-002	680-102	680-202	680-002-1	680-102-1	680-202-1
3/16	3/16	2	680-004	680-104	680-204	680-004-1	680-104-1	680-204-1
1/4	1/4	2	680-006	680-106	680-206	680-006-1	680-106-1	680-206-1
3/8	1/4	2-5/8	680-008	680-108	680-208	680-008-1	680-108-1	680-208-1
1/2	1/4	2-7/8	680-010	680-110	680-210	680-010-1	680-110-1	680-210-1
5/8	3/8	3	680-012	680-112	680-212	680-012-1	680-112-1	680-212-1
3/4	1/2	3	680-014	680-114	680-214	680-014-1	680-114-1	680-214-1
1	1/2	2-3/4	680-016	680-116	680-216	680-016-1	680-116-1	680-216-1

THREE FLUTE COUNTERSINKS



Three Flute • 60°, 82°, 90° and 100° • Coated and Uncoated

- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance




Standard, Series 680




OD	SHK	OAL	Uncoated				PowerA			
			60°	82°	90°	100°	60°	82°	90°	100°
D1	D2	L2								
1/8	1/8	1-1/2	680-302	680-402	680-502	-	680-302-1	680-402-1	680-502-1	-
3/16	3/16	2	680-304	680-404	680-504	-	680-304-1	680-404-1	680-504-1	-
1/4	1/4	2	680-306	680-406	680-506	682-106	680-306-1	680-406-1	680-506-1	682-106-1
3/8	1/4	2-5/8	680-308	680-408	680-508	682-108	680-308-1	680-408-1	680-508-1	682-108-1
1/2	1/4	2-7/8	680-310	680-410	680-510	682-110	680-310-1	680-410-1	680-510-1	682-110-1
5/8	3/8	3	680-312	680-412	680-512	682-112	680-312-1	680-412-1	680-512-1	682-112-1
3/4	1/2	3	680-314	680-414	680-514	682-114	680-314-1	680-414-1	680-514-1	682-114-1
1	1/2	2-3/4	680-316	680-416	680-516	682-116	680-316-1	680-416-1	680-516-1	682-116-1

SIX FLUTE COUNTERSINKS



Six Flute • 60°, 82°, 90°, and 100° • Coated and Uncoated



- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance




Standard, Series 680




OD	SHK	OAL	Uncoated				PowerA			
			D1	D2	L2	60°	82°	90°	100°	60°
1/8	1/8	1-1/2	680-602	680-702	680-802	-	680-602-1	680-702-1	680-802-1	-
3/16	3/16	2	680-604	680-704	680-804	-	680-604-1	680-704-1	680-804-1	-
1/4	1/4	2	680-606	680-706	680-806	680-906	680-606-1	680-706-1	680-806-1	680-906-1
3/8	1/4	2-5/8	680-608	680-708	680-808	680-908	680-608-1	680-708-1	680-808-1	680-908-1
1/2	1/4	2-7/8	680-610	680-710	680-810	680-910	680-610-1	680-710-1	680-810-1	680-910-1
5/8	3/8	3	680-612	680-712	680-812	680-912	680-612-1	680-712-1	680-812-1	680-912-1
3/4	1/2	3	680-614	680-714	680-814	680-914	680-614-1	680-714-1	680-814-1	680-914-1
1	1/2	2-3/4	680-616	680-716	680-816	680-916	680-616-1	680-716-1	680-816-1	680-916-1

CHAMFER TOOLS



Four Flute • 60°, 82° and 90° • Coated and Uncoated



- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance



Standard, Series 681



OD	SHK	OAL	Uncoated			PowerA		
			D1	D2	L2	60°	82°	90°
1/8	1/8	2	681-002	681-102	681-202	681-002-1	681-102-1	681-202-1
3/16	3/16	2	681-004	681-104	681-204	681-004-1	681-104-1	681-204-1
1/4	1/4	2-1/2	681-006	681-106	681-206	681-006-1	681-106-1	681-206-1
5/16	5/16	2-1/2	681-008	681-108	681-208	681-008-1	681-108-1	681-208-1
3/8	3/8	2-1/2	681-010	681-110	681-210	681-010-1	681-110-1	681-210-1
1/2	1/2	3	681-012	681-112	681-212	681-012-1	681-112-1	681-212-1

HIGH PERFORMANCE DRILLS

Hurricane Drill Series

- **Solid Carbide**
- **Solid or Coolant Through**



Our continuous improvement has led us to a process that gives you unmatched, consistent quality. That process is our unique MAP Technology! Mastercut Automated Production is our exclusive method of standardization and quality repeatability. The MAP combines technology, skill, and rigid processes to provide you with the most precise products that money can buy, batch to batch and year to year.

Our MAP...your map to success!








TABLE OF CONTENTS

	Hurricane 3XD Solid & Coolant Through140
	Hurricane 5XD Solid & Coolant Through144
	Hurricane 8XD Coolant Through150

Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P

Features Legend

	2 FL Solid		Plain shank
	2 FL Coolant Through		

Coatings Legend

	PowerA Coating
--	----------------

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized Volume)

Our superior tungsten carbide gives you the ability to be *aggressive* when you need to be. Growth inhibitors in our sub-micron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

HURRICANE HIGH PERFORMANCE DRILL FEATURES




- High performance drill with a common shank
- Coolant Through and Solid (Non-Coolant Through) styles available
- 3xD, 5xD, 8xD
- Uncoated and PowerA coating available
- Now also available in PowerNR coating (call for information)



Please contact us for our full line of metric products.


HURRICANE DRILLS - 3xD



HIGH PERFORMANCE DRILLS

3xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

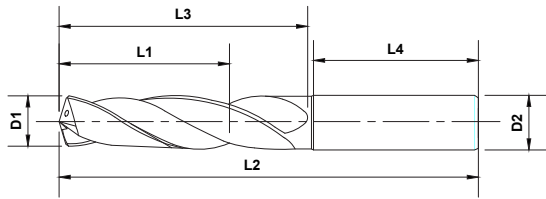- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



Series 650




Series 650, PowerA



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.1181	0.5511	0.787	0.2362	1.417	2.44	650-002	-	650-002-1	-
.1220	0.5511	0.787	0.2362	1.417	2.44	650-004	-	650-004-1	-
.1248	0.5511	0.787	0.2362	1.417	2.44	650-006	-	650-006-1	-
1/8	0.5511	0.787	0.2362	1.417	2.44	650-008	-	650-008-1	-
.1260	0.5511	0.787	0.2362	1.417	2.44	650-010	-	650-010-1	-
.1280	0.5511	0.787	0.2362	1.417	2.44	650-012	-	650-012-1	-
.1299	0.5511	0.787	0.2362	1.417	2.44	650-014	-	650-014-1	-
.1339	0.5511	0.787	0.2362	1.417	2.44	650-016	650-516	650-016-1	650-516-1
.1378	0.5511	0.787	0.2362	1.417	2.44	650-018	650-518	650-018-1	650-518-1
9/64	0.5511	0.787	0.2362	1.417	2.44	650-020	650-520	650-020-1	650-520-1
.1417	0.5511	0.787	0.2362	1.417	2.44	650-024	650-524	650-024-1	650-524-1
.1457	0.5511	0.787	0.2362	1.417	2.44	650-026	650-526	650-026-1	650-526-1
.1496	0.6690	0.944	0.2362	1.417	2.59	650-028	650-528	650-028-1	650-528-1
.1535	0.6690	0.944	0.2362	1.417	2.59	650-030	650-530	650-030-1	650-530-1
5/32	0.6690	0.944	0.2362	1.417	2.59	650-034	650-534	650-034-1	650-534-1
.1575	0.6690	0.944	0.2362	1.417	2.59	650-036	650-536	650-036-1	650-536-1
.1614	0.6690	0.944	0.2362	1.417	2.59	650-038	650-538	650-038-1	650-538-1
.1654	0.6690	0.944	0.2362	1.417	2.59	650-040	650-540	650-040-1	650-540-1
.1693	0.6690	0.944	0.2362	1.417	2.59	650-042	650-542	650-042-1	650-542-1
11/64	0.6690	0.944	0.2362	1.417	2.59	650-044	650-544	650-044-1	650-544-1
.1720	0.6690	0.944	0.2362	1.417	2.59	650-046	650-546	650-046-1	650-546-1
.1732	0.6690	0.944	0.2362	1.417	2.59	650-048	650-548	650-048-1	650-548-1
.1772	0.6690	0.944	0.2362	1.417	2.59	650-050	650-550	650-050-1	650-550-1
.1811	0.6690	0.944	0.2362	1.417	2.59	650-052	650-552	650-052-1	650-552-1
.1831	0.6690	0.944	0.2362	1.417	2.59	650-054	650-554	650-054-1	650-554-1
.1850	0.6690	0.944	0.2362	1.417	2.59	650-056	650-556	650-056-1	650-556-1
.1874	0.7874	1.102	0.2362	1.417	2.59	650-058	650-558	650-058-1	650-558-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.


HURRICANE DRILLS - 3xD



HIGH PERFORMANCE DRILLS

3xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

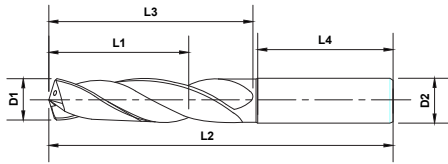- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality




OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
3/16	0.7874	1.102	0.2362	1.417	2.59	650-060	650-560	650-060-1	650-560-1
.1890	0.7874	1.102	0.2362	1.417	2.59	650-062	650-562	650-062-1	650-562-1
.1929	0.7874	1.102	0.2362	1.417	2.59	650-064	650-564	650-064-1	650-564-1
.1969	0.7874	1.102	0.2362	1.417	2.59	650-066	650-566	650-066-1	650-566-1
.2008	0.7874	1.102	0.2362	1.417	2.59	650-068	650-568	650-068-1	650-568-1
13/64	0.7874	1.102	0.2362	1.417	2.59	650-072	650-572	650-072-1	650-572-1
.2047	0.7874	1.102	0.2362	1.417	2.59	650-074	650-574	650-074-1	650-574-1
.2087	0.7874	1.102	0.2362	1.417	2.59	650-076	650-576	650-076-1	650-576-1
.2126	0.7874	1.102	0.2362	1.417	2.59	650-078	650-578	650-078-1	650-578-1
.2165	0.7874	1.102	0.2362	1.417	2.59	650-080	650-580	650-080-1	650-580-1
.2185	0.7874	1.102	0.2362	1.417	2.59	650-082	650-582	650-082-1	650-582-1
7/32	0.7874	1.102	0.2362	1.417	2.59	650-084	650-584	650-084-1	650-584-1
.2189	0.7874	1.102	0.2362	1.417	2.59	650-086	650-586	650-086-1	650-586-1
.2205	0.7874	1.102	0.2362	1.417	2.59	650-088	650-588	650-088-1	650-588-1
.2244	0.7874	1.102	0.2362	1.417	2.59	650-090	650-590	650-090-1	650-590-1
.2283	0.7874	1.102	0.2362	1.417	2.59	650-092	650-592	650-092-1	650-592-1
.2323	0.7874	1.102	0.2362	1.417	2.59	650-094	650-594	650-094-1	650-594-1
.2343	0.7874	1.102	0.2362	1.417	2.59	650-096	650-596	650-096-1	650-596-1
15/64	0.7874	1.102	0.2362	1.417	2.59	650-098	650-598	650-098-1	650-598-1
.2362	0.7874	1.102	0.2362	1.417	2.59	650-100	650-600	650-100-1	650-600-1
.2402	0.9448	1.338	0.3150	1.417	3.11	650-102	650-602	650-102-1	650-602-1
.2441	0.9448	1.338	0.3150	1.417	3.11	650-104	650-604	650-104-1	650-604-1
.2480	0.9448	1.338	0.3150	1.417	3.11	650-106	650-606	650-106-1	650-606-1
1/4	0.9448	1.338	0.3150	1.417	3.11	650-108	650-608	650-108-1	650-608-1
.2520	0.9448	1.338	0.3150	1.417	3.11	650-110	650-610	650-110-1	650-610-1
.2559	0.9448	1.338	0.3150	1.417	3.11	650-112	650-612	650-112-1	650-612-1
.2598	0.9448	1.338	0.3150	1.417	3.11	650-114	650-614	650-114-1	650-614-1
.2638	0.9448	1.338	0.3150	1.417	3.11	650-116	650-616	650-116-1	650-616-1
17/64	0.9448	1.338	0.3150	1.417	3.11	650-118	650-618	650-118-1	650-618-1
.2657	0.9448	1.338	0.3150	1.417	3.11	650-120	650-620	650-120-1	650-620-1
.2677	0.9448	1.338	0.3150	1.417	3.11	650-122	650-622	650-122-1	650-622-1
.2717	0.9448	1.338	0.3150	1.417	3.11	650-124	650-624	650-124-1	650-624-1
.2756	0.9448	1.338	0.3150	1.417	3.11	650-126	650-626	650-126-1	650-626-1
.2795	1.1410	1.614	0.3150	1.417	3.11	650-128	650-628	650-128-1	650-628-1
.2811	1.1410	1.614	0.3150	1.417	3.11	650-130	650-630	650-130-1	650-630-1
9/32	1.1410	1.614	0.3150	1.417	3.11	650-132	650-632	650-132-1	650-632-1
.2835	1.1410	1.614	0.3150	1.417	3.11	650-134	650-634	650-134-1	650-634-1
.2874	1.1410	1.614	0.3150	1.417	3.11	650-136	650-636	650-136-1	650-636-1
.2913	1.1410	1.614	0.3150	1.417	3.11	650-138	650-638	650-138-1	650-638-1
.2953	1.1410	1.614	0.3150	1.417	3.11	650-140	650-640	650-140-1	650-640-1
19/64	1.1410	1.614	0.3150	1.417	3.11	650-142	650-642	650-142-1	650-642-1
.2992	1.1410	1.614	0.3150	1.417	3.11	650-146	650-646	650-146-1	650-646-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.

High Performance Drills




HURRICANE DRILLS - 3xD



HIGH PERFORMANCE DRILLS

3xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

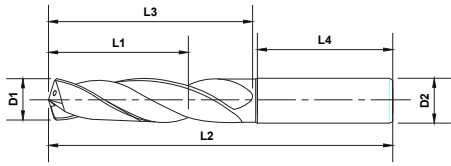
- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.3031	1.1410	1.614	0.3150	1.417	3.11	650-148	650-648	650-148-1	650-648-1
.3071	1.1410	1.614	0.3150	1.417	3.11	650-150	650-650	650-150-1	650-650-1
.3110	1.1410	1.614	0.3150	1.417	3.11	650-152	650-652	650-152-1	650-652-1
5/16	1.1410	1.614	0.3150	1.417	3.11	650-154	650-654	650-154-1	650-654-1
.3126	1.1410	1.614	0.3150	1.417	3.11	650-156	650-656	650-156-1	650-656-1
.3150	1.1410	1.614	0.3150	1.417	3.11	650-158	650-658	650-158-1	650-658-1
.3189	1.3770	1.850	0.3937	1.575	3.50	650-160	650-660	650-160-1	650-660-1
.3228	1.3770	1.850	0.3937	1.575	3.50	650-162	650-662	650-162-1	650-662-1
.3268	1.3770	1.850	0.3937	1.575	3.50	650-164	650-664	650-164-1	650-664-1
.3280	1.3770	1.850	0.3937	1.575	3.50	650-166	650-666	650-166-1	650-666-1
21/64	1.3770	1.850	0.3937	1.575	3.50	650-168	650-668	650-168-1	650-668-1
.3307	1.3770	1.850	0.3937	1.575	3.50	650-170	650-670	650-170-1	650-670-1
.3346	1.3770	1.850	0.3937	1.575	3.50	650-172	650-672	650-172-1	650-672-1
.3386	1.3770	1.850	0.3937	1.575	3.50	650-174	650-674	650-174-1	650-674-1
.3425	1.3770	1.850	0.3937	1.575	3.50	650-176	650-676	650-176-1	650-676-1
11/32	1.3770	1.850	0.3937	1.575	3.50	650-178	650-678	650-178-1	650-678-1
.3465	1.3770	1.850	0.3937	1.575	3.50	650-182	650-682	650-182-1	650-682-1
.3504	1.3770	1.850	0.3937	1.575	3.50	650-184	650-684	650-184-1	650-684-1
.3543	1.3770	1.850	0.3937	1.575	3.50	650-186	650-686	650-186-1	650-686-1
.3583	1.3770	1.850	0.3937	1.575	3.50	650-188	650-688	650-188-1	650-688-1
23/64	1.3770	1.850	0.3937	1.575	3.50	650-192	650-692	650-192-1	650-692-1
.3622	1.3770	1.850	0.3937	1.575	3.50	650-194	650-694	650-194-1	650-694-1
.3642	1.3770	1.850	0.3937	1.575	3.50	650-196	650-696	650-196-1	650-696-1
.3661	1.3770	1.850	0.3937	1.575	3.50	650-198	650-698	650-198-1	650-698-1
.3701	1.3770	1.850	0.3937	1.575	3.50	650-200	650-700	650-200-1	650-700-1
.3740	1.3770	1.850	0.3937	1.575	3.50	650-202	650-702	650-202-1	650-702-1
.3748	1.3770	1.850	0.3937	1.575	3.50	650-204	650-704	650-204-1	650-704-1
3/8	1.3770	1.850	0.3937	1.575	3.50	650-206	650-706	650-206-1	650-706-1
.3780	1.3770	1.850	0.3937	1.575	3.50	650-208	650-708	650-208-1	650-708-1
.3819	1.3770	1.850	0.3937	1.575	3.50	650-210	650-710	650-210-1	650-710-1
.3858	1.3770	1.850	0.3937	1.575	3.50	650-212	650-712	650-212-1	650-712-1
.3898	1.3770	1.850	0.3937	1.575	3.50	650-214	650-714	650-214-1	650-714-1
25/64	1.3770	1.850	0.3937	1.575	3.50	650-216	650-716	650-216-1	650-716-1
.3937	1.3770	1.850	0.3937	1.575	3.50	650-220	650-720	650-220-1	650-720-1
.3976	1.5740	2.165	0.4724	1.772	4.01	650-222	650-722	650-222-1	650-722-1
.4016	1.5740	2.165	0.4724	1.772	4.01	650-224	650-724	650-224-1	650-724-1
.4055	1.5740	2.165	0.4724	1.772	4.01	650-226	650-726	650-226-1	650-726-1
13/32	1.5740	2.165	0.4724	1.772	4.01	650-230	650-730	650-230-1	650-730-1
.4094	1.5740	2.165	0.4724	1.772	4.01	650-232	650-732	650-232-1	650-732-1
.4134	1.5740	2.165	0.4724	1.772	4.01	650-234	650-734	650-234-1	650-734-1
.4173	1.5740	2.165	0.4724	1.772	4.01	650-236	650-736	650-236-1	650-736-1
.4213	1.5740	2.165	0.4724	1.772	4.01	650-238	650-738	650-238-1	650-738-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.


HURRICANE DRILLS - 3xD



HIGH PERFORMANCE DRILLS

3xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

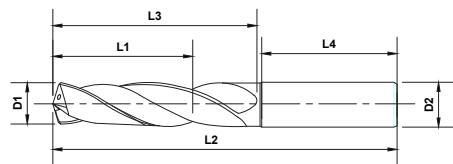
- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.27/64	1.5740	2.165	0.4724	1.772	4.01	650-240	650-740	650-240-1	650-740-1
.4252	1.5740	2.165	0.4724	1.772	4.01	650-242	650-742	650-242-1	650-742-1
.4291	1.5740	2.165	0.4724	1.772	4.01	650-244	650-744	650-244-1	650-744-1
.4331	1.5740	2.165	0.4724	1.772	4.01	650-246	650-746	650-246-1	650-746-1
.4370	1.5740	2.165	0.4724	1.772	4.01	650-248	650-748	650-248-1	650-748-1
.4374	1.5740	2.165	0.4724	1.772	4.01	650-250	650-750	650-250-1	650-750-1
7/16	1.5740	2.165	0.4724	1.772	4.01	650-252	650-752	650-252-1	650-752-1
.4409	1.5740	2.165	0.4724	1.772	4.01	650-254	650-754	650-254-1	650-754-1
.4449	1.5740	2.165	0.4724	1.772	4.01	650-256	650-756	650-256-1	650-756-1
.4488	1.5740	2.165	0.4724	1.772	4.01	650-258	650-758	650-258-1	650-758-1
.4528	1.5740	2.165	0.4724	1.772	4.01	650-260	650-760	650-260-1	650-760-1
29/64	1.5740	2.165	0.4724	1.772	4.01	650-262	650-762	650-262-1	650-762-1
.4567	1.5740	2.165	0.4724	1.772	4.01	650-264	650-764	650-264-1	650-764-1
.4606	1.5740	2.165	0.4724	1.772	4.01	650-266	650-766	650-266-1	650-766-1
.4646	1.5740	2.165	0.4724	1.772	4.01	650-268	650-768	650-268-1	650-768-1
.4685	1.5740	2.165	0.4724	1.772	4.01	650-270	650-770	650-270-1	650-770-1
15/32	1.5740	2.165	0.4724	1.772	4.01	650-272	650-772	650-272-1	650-772-1
.4689	1.5740	2.165	0.4724	1.772	4.01	650-274	650-774	650-274-1	650-774-1
.4724	1.5740	2.165	0.4724	1.772	4.01	650-276	650-776	650-276-1	650-776-1
31/64	1.5740	2.165	0.5512	1.772	4.01	650-278	650-778	650-278-1	650-778-1
.4921	1.6920	2.362	0.5512	1.772	4.21	650-280	650-780	650-280-1	650-780-1
1/2	1.6920	2.362	0.5512	1.772	4.21	650-284	650-784	650-284-1	650-784-1
.5118	1.6920	2.362	0.5512	1.772	4.21	650-286	650-786	650-286-1	650-786-1
.5315	1.6920	2.362	0.5512	1.772	4.21	650-288	650-788	650-288-1	650-788-1
.5394	1.6920	2.362	0.5512	1.772	4.21	650-290	650-790	650-290-1	650-790-1
.5512	1.6920	2.362	0.5512	1.772	4.21	650-292	650-792	650-292-1	650-792-1
9/16	1.7710	2.559	0.6299	1.889	4.52	650-294	650-794	650-294-1	650-794-1
.5709	1.7710	2.559	0.6299	1.889	4.52	650-296	650-796	650-296-1	650-796-1
.5787	1.7710	2.559	0.6299	1.889	4.52	650-298	650-798	650-298-1	650-798-1
.5906	1.7710	2.559	0.6299	1.889	4.52	650-300	650-800	650-300-1	650-800-1
.6102	1.7710	2.559	0.6299	1.889	4.52	650-302	650-802	650-302-1	650-802-1
.6181	1.7710	2.559	0.6299	1.889	4.52	650-304	650-804	650-304-1	650-804-1
.6299	1.7710	2.559	0.6299	1.889	4.52	650-306	650-806	650-306-1	650-806-1
.6496	2.007	2.874	0.7087	1.889	4.84	650-308	650-808	650-308-1	650-808-1
.6693	2.007	2.874	0.7087	1.889	4.84	650-310	650-810	650-310-1	650-810-1
.6890	2.007	2.874	0.7087	1.889	4.84	650-312	650-812	650-312-1	650-812-1
.7087	2.007	2.874	0.7087	1.889	4.84	650-314	650-814	650-314-1	650-814-1
.7283	2.165	3.110	0.7874	1.969	5.15	650-316	650-816	650-316-1	650-816-1
.7480	2.165	3.110	0.7874	1.969	5.15	650-318	650-818	650-318-1	650-818-1
.7677	2.165	3.110	0.7874	1.969	5.15	650-320	650-820	650-320-1	650-820-1
.7874	2.165	3.110	0.7874	1.969	5.15	650-322	650-822	650-322-1	650-822-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.


HURRICANE DRILLS - 5xD



HIGH PERFORMANCE DRILLS

5xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

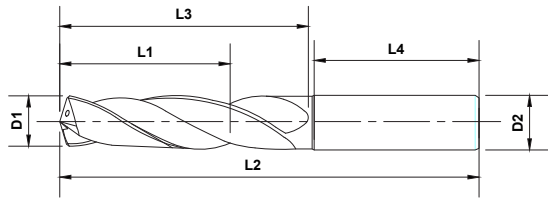- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



Series 651




Series 651, PowerA



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.1181	0.905	1.102	.2362	1.417	2.59	651-002	-	651-002-1	-
.1220	0.905	1.102	.2362	1.417	2.59	651-004	-	651-004-1	-
.1248	0.905	1.102	.2362	1.417	2.59	651-006	-	651-006-1	-
1/8	0.905	1.102	.2362	1.417	2.59	651-008	-	651-008-1	-
.1260	0.905	1.102	.2362	1.417	2.59	651-010	-	651-010-1	-
.1280	0.905	1.102	.2362	1.417	2.59	651-012	-	651-012-1	-
.1299	0.905	1.102	.2362	1.417	2.59	651-014	-	651-014-1	-
.1339	0.905	1.102	.2362	1.417	2.59	651-016	651-516	651-016-1	651-516-1
.1378	0.905	1.102	.2362	1.417	2.59	651-018	651-518	651-018-1	651-518-1
9/64	0.905	1.102	.2362	1.417	2.59	651-020	651-520	651-020-1	651-520-1
.1417	0.905	1.102	.2362	1.417	2.59	651-024	651-524	651-024-1	651-524-1
.1457	0.905	1.102	.2362	1.417	2.59	651-026	651-526	651-026-1	651-526-1
.1496	1.141	1.417	.2362	1.417	2.91	651-028	651-528	651-028-1	651-528-1
.1535	1.141	1.417	.2362	1.417	2.91	651-030	651-530	651-030-1	651-530-1
5/32	1.141	1.417	.2362	1.417	2.91	651-034	651-534	651-034-1	651-534-1
.1575	1.141	1.417	.2362	1.417	2.91	651-036	651-536	651-036-1	651-536-1
.1614	1.141	1.417	.2362	1.417	2.91	651-038	651-538	651-038-1	651-538-1
.1654	1.141	1.417	.2362	1.417	2.91	651-040	651-540	651-040-1	651-540-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.


HURRICANE DRILLS - 5xD



HIGH PERFORMANCE DRILLS

5xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

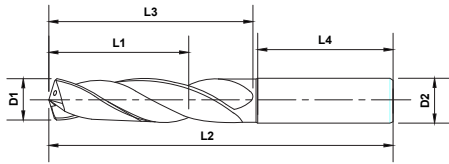- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality




OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.1693	1.141	1.417	.2362	1.417	2.91	651-042	651-542	651-042-1	651-542-1
11/64	1.141	1.417	.2362	1.417	2.91	651-044	651-544	651-044-1	651-544-1
.1720	1.141	1.417	.2362	1.417	2.91	651-046	651-546	651-046-1	651-546-1
.1732	1.141	1.417	.2362	1.417	2.91	651-048	651-548	651-048-1	651-548-1
.1772	1.141	1.417	.2362	1.417	2.91	651-050	651-550	651-050-1	651-550-1
.1811	1.141	1.417	.2362	1.417	2.91	651-052	651-552	651-052-1	651-552-1
.1831	1.141	1.417	.2362	1.417	2.91	651-054	651-554	651-054-1	651-554-1
.1850	1.377	1.732	.2362	1.417	3.22	651-056	651-556	651-056-1	651-556-1
.1874	1.377	1.732	.2362	1.417	3.22	651-058	651-558	651-058-1	651-558-1
3/16	1.377	1.732	.2362	1.417	3.22	651-060	651-560	651-060-1	651-560-1
.1890	1.377	1.732	.2362	1.417	3.22	651-062	651-562	651-062-1	651-562-1
.1929	1.377	1.732	.2362	1.417	3.22	651-064	651-564	651-064-1	651-564-1
.1969	1.377	1.732	.2362	1.417	3.22	651-066	651-566	651-066-1	651-566-1
.2008	1.377	1.732	.2362	1.417	3.22	651-068	651-568	651-068-1	651-568-1
13/64	1.377	1.732	.2362	1.417	3.22	651-072	651-572	651-072-1	651-572-1
.2047	1.377	1.732	.2362	1.417	3.22	651-074	651-574	651-074-1	651-574-1
.2087	1.377	1.732	.2362	1.417	3.22	651-076	651-576	651-076-1	651-576-1
.2126	1.377	1.732	.2362	1.417	3.22	651-078	651-578	651-078-1	651-578-1
.2165	1.377	1.732	.2362	1.417	3.22	651-080	651-580	651-080-1	651-580-1
.2185	1.377	1.732	.2362	1.417	3.22	651-082	651-582	651-082-1	651-582-1
7/32	1.377	1.732	.2362	1.417	3.22	651-084	651-584	651-084-1	651-584-1
.2189	1.377	1.732	.2362	1.417	3.22	651-086	651-586	651-086-1	651-586-1
.2205	1.377	1.732	.2362	1.417	3.22	651-088	651-588	651-088-1	651-588-1
.2244	1.377	1.732	.2362	1.417	3.22	651-090	651-590	651-090-1	651-590-1
.2283	1.377	1.732	.2362	1.417	3.22	651-092	651-592	651-092-1	651-592-1
.2323	1.377	1.732	.2362	1.417	3.22	651-094	651-594	651-094-1	651-594-1
.2343	1.377	1.732	.2362	1.417	3.22	651-096	651-596	651-096-1	651-596-1
15/64	1.377	1.732	.2362	1.417	3.22	651-098	651-598	651-098-1	651-598-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.

High Performance Drills




HURRICANE DRILLS - 5xD



HIGH PERFORMANCE DRILLS

5xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

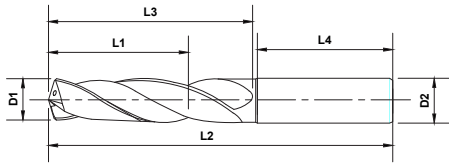
- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.2362	1.377	1.732	.2362	1.417	3.22	651-100	651-600	651-100-1	651-600-1
.2402	1.692	2.086	.3150	1.417	3.58	651-102	651-602	651-102-1	651-602-1
.2441	1.692	2.086	.3150	1.417	3.58	651-104	651-604	651-104-1	651-604-1
.2480	1.692	2.086	.3150	1.417	3.58	651-106	651-606	651-106-1	651-606-1
1/4	1.692	2.086	.3150	1.417	3.58	651-108	651-608	651-108-1	651-608-1
.2520	1.692	2.086	.3150	1.417	3.58	651-110	651-610	651-110-1	651-610-1
.2559	1.692	2.086	.3150	1.417	3.58	651-112	651-612	651-112-1	651-612-1
.2598	1.692	2.086	.3150	1.417	3.58	651-114	651-614	651-114-1	651-614-1
.2638	1.692	2.086	.3150	1.417	3.58	651-116	651-616	651-116-1	651-616-1
17/64	1.692	2.086	.3150	1.417	3.58	651-118	651-618	651-118-1	651-618-1
.2657	1.692	2.086	.3150	1.417	3.58	651-120	651-620	651-120-1	651-620-1
.2677	1.692	2.086	.3150	1.417	3.58	651-122	651-622	651-122-1	651-622-1
.2717	1.692	2.086	.3150	1.417	3.58	651-124	651-624	651-124-1	651-624-1
.2756	1.692	2.086	.3150	1.417	3.58	651-126	651-626	651-126-1	651-626-1
.2795	1.692	2.086	.3150	1.417	3.58	651-128	651-628	651-128-1	651-628-1
.2811	1.692	2.086	.3150	1.417	3.58	651-130	651-630	651-130-1	651-630-1
9/32	1.692	2.086	.3150	1.417	3.58	651-132	651-632	651-132-1	651-632-1
.2835	1.692	2.086	.3150	1.417	3.58	651-134	651-634	651-134-1	651-634-1
.2874	1.692	2.086	.3150	1.417	3.58	651-136	651-636	651-136-1	651-636-1
.2913	1.692	2.086	.3150	1.417	3.58	651-138	651-638	651-138-1	651-638-1
.2953	1.692	2.086	.3150	1.417	3.58	651-140	651-640	651-140-1	651-640-1
19/64	1.692	2.086	.3150	1.417	3.58	651-142	651-642	651-142-1	651-642-1
.2992	1.692	2.086	.3150	1.417	3.58	651-146	651-646	651-146-1	651-646-1
.3031	1.692	2.086	.3150	1.417	3.58	651-148	651-648	651-148-1	651-648-1
.3071	1.692	2.086	.3150	1.417	3.58	651-150	651-650	651-150-1	651-650-1
.3110	1.692	2.086	.3150	1.417	3.58	651-152	651-652	651-152-1	651-652-1
5/16	1.692	2.086	.3150	1.417	3.58	651-154	651-654	651-154-1	651-654-1
.3126	1.692	2.086	.3150	1.417	3.58	651-156	651-656	651-156-1	651-656-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.


HURRICANE DRILLS - 5xD



HIGH PERFORMANCE DRILLS

5xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

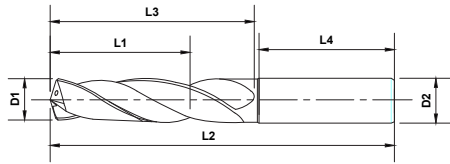- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality




OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.3150	1.692	2.086	.3150	1.417	3.58	651-158	651-658	651-158-1	651-658-1
.3189	1.929	2.401	.3937	1.575	4.05	651-160	651-660	651-160-1	651-660-1
.3228	1.929	2.401	.3937	1.575	4.05	651-162	651-662	651-162-1	651-662-1
.3268	1.929	2.401	.3937	1.575	4.05	651-164	651-664	651-164-1	651-664-1
.3280	1.929	2.401	.3937	1.575	4.05	651-166	651-666	651-166-1	651-666-1
21/64	1.929	2.401	.3937	1.575	4.05	651-168	651-668	651-168-1	651-668-1
.3307	1.929	2.401	.3937	1.575	4.05	651-170	651-670	651-170-1	651-670-1
.3346	1.929	2.401	.3937	1.575	4.05	651-172	651-672	651-172-1	651-672-1
.3386	1.929	2.401	.3937	1.575	4.05	651-174	651-674	651-174-1	651-674-1
.3425	1.929	2.401	.3937	1.575	4.05	651-176	651-676	651-176-1	651-676-1
11/32	1.929	2.401	.3937	1.575	4.05	651-178	651-678	651-178-1	651-678-1
.3465	1.929	2.401	.3937	1.575	4.05	651-182	651-682	651-182-1	651-682-1
.3504	1.929	2.401	.3937	1.575	4.05	651-184	651-684	651-184-1	651-684-1
.3543	1.929	2.401	.3937	1.575	4.05	651-186	651-686	651-186-1	651-686-1
.3583	1.929	2.401	.3937	1.575	4.05	651-188	651-688	651-188-1	651-688-1
23/64	1.929	2.401	.3937	1.575	4.05	651-192	651-692	651-192-1	651-692-1
.3622	1.929	2.401	.3937	1.575	4.05	651-194	651-694	651-194-1	651-694-1
.3642	1.929	2.401	.3937	1.575	4.05	651-196	651-696	651-196-1	651-696-1
.3661	1.929	2.401	.3937	1.575	4.05	651-198	651-698	651-198-1	651-698-1
.3701	1.929	2.401	.3937	1.575	4.05	651-200	651-700	651-200-1	651-700-1
.3740	1.929	2.401	.3937	1.575	4.05	651-202	651-702	651-202-1	651-702-1
.3748	1.929	2.401	.3937	1.575	4.05	651-204	651-704	651-204-1	651-704-1
3/8	1.929	2.401	.3937	1.575	4.05	651-206	651-706	651-206-1	651-706-1
.3780	1.929	2.401	.3937	1.575	4.05	651-208	651-708	651-208-1	651-708-1
.3819	1.929	2.401	.3937	1.575	4.05	651-210	651-710	651-210-1	651-710-1
.3858	1.929	2.401	.3937	1.575	4.05	651-212	651-712	651-212-1	651-712-1
.3898	1.929	2.401	.3937	1.575	4.05	651-214	651-714	651-214-1	651-714-1
25/64	1.929	2.401	.3937	1.575	4.05	651-216	651-716	651-216-1	651-716-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.

High Performance Drills


HURRICANE DRILLS - 5xD



HIGH PERFORMANCE DRILLS

5xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

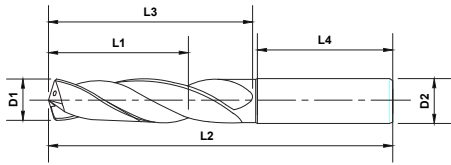
- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.3937	1.929	2.401	.3937	1.575	4.05	651-220	651-720	651-220-1	651-720-1
.3976	2.204	2.795	.4724	1.772	4.64	651-222	651-722	651-222-1	651-722-1
.4016	2.204	2.795	.4724	1.772	4.64	651-224	651-724	651-224-1	651-724-1
.4055	2.204	2.795	.4724	1.772	4.64	651-226	651-726	651-226-1	651-726-1
13/32	2.204	2.795	.4724	1.772	4.64	651-230	651-730	651-230-1	651-730-1
.4094	2.204	2.795	.4724	1.772	4.64	651-232	651-732	651-232-1	651-732-1
.4134	2.204	2.795	.4724	1.772	4.64	651-234	651-734	651-234-1	651-734-1
.4173	2.204	2.795	.4724	1.772	4.64	651-236	651-736	651-236-1	651-736-1
.4213	2.204	2.795	.4724	1.772	4.64	651-238	651-738	651-238-1	651-738-1
27/64	2.204	2.795	.4724	1.772	4.64	651-240	651-740	651-240-1	651-740-1
.4252	2.204	2.795	.4724	1.772	4.64	651-242	651-742	651-242-1	651-742-1
.4291	2.204	2.795	.4724	1.772	4.64	651-244	651-744	651-244-1	651-744-1
.4331	2.204	2.795	.4724	1.772	4.64	651-246	651-746	651-246-1	651-746-1
.4374	2.204	2.795	.4724	1.772	4.64	651-250	651-750	651-250-1	651-750-1
7/16	2.204	2.795	.4724	1.772	4.64	651-252	651-752	651-252-1	651-752-1
.4409	2.204	2.795	.4724	1.772	4.64	651-254	651-754	651-254-1	651-754-1
.4449	2.204	2.795	.4724	1.772	4.64	651-256	651-756	651-256-1	651-756-1
.4488	2.204	2.795	.4724	1.772	4.64	651-258	651-758	651-258-1	651-758-1
.4528	2.204	2.795	.4724	1.772	4.64	651-260	651-760	651-260-1	651-760-1
29/64	2.204	2.795	.4724	1.772	4.64	651-262	651-762	651-262-1	651-762-1
.4567	2.204	2.795	.4724	1.772	4.64	651-264	651-764	651-264-1	651-764-1
.4606	2.204	2.795	.4724	1.772	4.64	651-266	651-766	651-266-1	651-766-1
.4646	2.204	2.795	.4724	1.772	4.64	651-268	651-768	651-268-1	651-768-1
15/32	2.204	2.795	.4724	1.772	4.64	651-272	651-772	651-272-1	651-772-1
.4689	2.204	2.795	.4724	1.772	4.64	651-274	651-774	651-274-1	651-774-1
.4724	2.204	2.795	.4724	1.772	4.64	651-276	651-776	651-276-1	651-776-1
31/64	2.362	2.795	.5512	1.772	4.64	651-278	651-778	651-278-1	651-778-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.


HURRICANE DRILLS - 5xD



HIGH PERFORMANCE DRILLS

5xD, Solid and Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

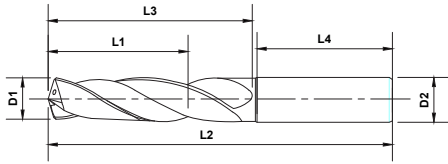- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality




OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated		PowerA	
						Solid	Coolant Through	Solid	Coolant Through
D1	L1	L3	D2	L4	L2				
.4921	2.362	3.031	.5512	1.772	4.88	651-280	651-780	651-280-1	651-780-1
1/2	2.362	3.031	.5512	1.772	4.88	651-284	651-784	651-284-1	651-784-1
.5118	2.362	3.031	.5512	1.772	4.88	651-286	651-786	651-286-1	651-786-1
17/32	2.362	3.03	.5512	1.772	4.88	651-288	651-788	651-288-1	651-788-1
.5315	2.362	3.031	.5512	1.772	4.88	651-290	651-790	651-290-1	651-790-1
.5394	2.362	3.031	.5512	1.772	4.88	651-292	651-792	651-292-1	651-792-1
.5512	2.362	3.031	.5512	1.772	4.88	651-296	651-796	651-296-1	651-796-1
9/16	2.480	3.267	.6299	1.889	5.23	651-302	651-802	651-302-1	651-802-1
.5709	2.480	3.267	.6299	1.889	5.23	651-304	651-804	651-304-1	651-804-1
37/64	2.480	3.267	.6299	1.889	5.23	651-306	651-806	651-306-1	651-806-1
.5787	2.480	3.267	.6299	1.889	5.23	651-308	651-808	651-308-1	651-808-1
.5906	2.480	3.267	.6299	1.889	5.23	651-310	651-810	651-310-1	651-810-1
39/64	2.480	3.267	.6299	1.889	5.23	651-312	651-812	651-312-1	651-812-1
.6102	2.480	3.267	.6299	1.889	5.23	651-314	651-814	651-314-1	651-814-1
.6181	2.480	3.267	.6299	1.889	5.23	651-316	651-816	651-316-1	651-816-1
5/8	2.480	3.267	.6299	1.889	5.23	651-318	651-818	651-318-1	651-818-1
.6299	2.480	3.267	.6299	1.889	5.23	651-320	651-820	651-320-1	651-820-1
.6496	2.795	3.661	.7087	1.889	5.62	651-322	651-822	651-322-1	651-822-1
.6693	2.795	3.661	.7087	1.889	5.62	651-324	651-824	651-324-1	651-824-1
.6890	2.795	3.661	.7087	1.889	5.62	651-326	651-826	651-326-1	651-826-1
.7087	2.795	3.661	.7087	1.889	5.62	651-328	651-828	651-328-1	651-828-1
.7283	3.031	3.976	.7874	1.969	6.02	651-330	651-830	651-330-1	651-830-1
.7480	3.031	3.976	.7874	1.969	6.02	651-332	651-832	651-332-1	651-832-1
.7677	3.031	3.976	.7874	1.969	6.02	651-334	651-834	651-334-1	651-834-1
.7874	3.031	3.976	.7874	1.969	6.02	651-336	651-836	651-336-1	651-836-1

* For extreme performance drilling, try our PowerNR coating. Use the uncoated part number and add -8.

High Performance Drills


HURRICANE DRILLS - 8xD



HIGH PERFORMANCE DRILLS

8xD, Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

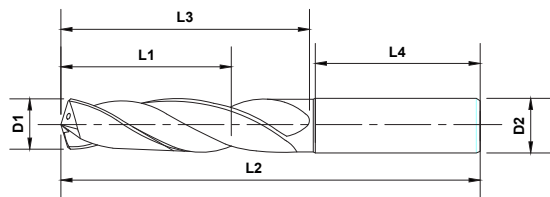- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



Series 652




Series 652, PowerA



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated	PowerA
D1	L1	L3	D2	L4	L2	Coolant Through	Coolant Through
.1339	1.141	1.338	.2362	1.3386	2.83	652-512	652-512-1
.1378	1.141	1.338	.2362	1.3386	2.83	652-514	652-514-1
9/64	1.141	1.338	.2362	1.3386	2.83	652-516	652-516-1
.1417	1.141	1.338	.2362	1.3386	2.83	652-518	652-518-1
.1457	1.141	1.338	.2362	1.3386	2.83	652-520	652-520-1
.1496	1.417	1.692	.2362	1.3386	3.18	652-522	652-522-1
.1535	1.417	1.692	.2362	1.3386	3.18	652-524	652-524-1
5/32	1.417	1.692	.2362	1.3386	3.18	652-526	652-526-1
.1575	1.417	1.692	.2362	1.3386	3.18	652-528	652-528-1
.1614	1.417	1.692	.2362	1.3386	3.18	652-530	652-530-1
.1654	1.417	1.692	.2362	1.3386	3.18	652-532	652-532-1
.1693	1.417	1.692	.2362	1.3386	3.18	652-534	652-534-1
11/64	1.417	1.692	.2362	1.3386	3.18	652-536	652-536-1
.1732	1.417	1.692	.2362	1.3386	3.18	652-538	652-538-1
.1772	1.417	1.692	.2362	1.3386	3.18	652-540	652-540-1
.1811	1.417	1.692	.2362	1.3386	3.18	652-542	652-542-1
.1850	1.417	1.692	.2362	1.3386	3.18	652-544	652-544-1
3/16	1.417	1.692	.2362	1.3386	3.18	652-546	652-546-1
.1890	2.086	2.244	.2362	1.3386	3.74	652-548	652-548-1
.1929	2.086	2.244	.2362	1.3386	3.74	652-550	652-550-1
.1969	2.086	2.244	.2362	1.4173	3.74	652-552	652-552-1
.2008	2.086	2.244	.2362	1.4173	3.74	652-554	652-554-1
13/64	2.086	2.244	.2362	1.4173	3.74	652-556	652-556-1
.2047	2.086	2.244	.2362	1.4173	3.74	652-558	652-558-1
.2087	2.086	2.244	.2362	1.4173	3.74	652-560	652-560-1


HURRICANE DRILLS - 8xD



HIGH PERFORMANCE DRILLS

8xD, Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

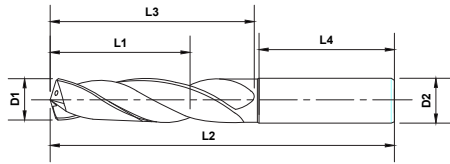
- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated	PowerA
D1	L1	L3	D2	L4	L2	Coolant Through	Coolant Through
.2126	2.086	2.244	.2362	1.4173	3.74	652-562	652-562-1
.2165	2.086	2.244	.2362	1.4173	3.74	652-564	652-564-1
7/32	2.086	2.244	.2362	1.4173	3.74	652-566	652-566-1
.2205	2.086	2.244	.2362	1.4173	3.74	652-568	652-568-1
.2244	2.086	2.244	.2362	1.4173	3.74	652-570	652-570-1
.2283	2.086	2.244	.2362	1.4173	3.74	652-572	652-572-1
.2323	2.086	2.244	.2362	1.4173	3.74	652-574	652-574-1
15/64	2.086	2.244	.2362	1.4173	3.74	652-576	652-576-1
.2362	2.086	2.244	.2362	1.4173	3.74	652-578	652-578-1
.2402	2.598	2.992	.3150	1.4173	4.48	652-580	652-580-1
.2441	2.598	2.992	.3150	1.4173	4.48	652-582	652-582-1
.2480	2.598	2.992	.3150	1.4173	4.48	652-584	652-584-1
1/4	2.598	2.992	.3150	1.4173	4.48	652-586	652-586-1
.2520	2.598	2.992	.3150	1.4173	4.48	652-588	652-588-1
.2559	2.598	2.992	.3150	1.4173	4.48	652-590	652-590-1
.2598	2.598	2.992	.3150	1.4173	4.48	652-592	652-592-1
.2638	2.598	2.992	.3150	1.4173	4.48	652-594	652-594-1
17/64	2.598	2.992	.3150	1.4173	4.48	652-596	652-596-1
.2677	2.598	2.992	.3150	1.4173	4.48	652-598	652-598-1
.2717	2.598	2.992	.3150	1.4173	4.48	652-600	652-600-1
.2756	2.598	2.992	.3150	1.4173	4.48	652-602	652-602-1
.2795	2.598	2.992	.3150	1.4173	4.48	652-604	652-604-1
9/32	2.598	2.992	.3150	1.4173	4.48	652-606	652-606-1
.2835	2.598	2.992	.3150	1.4173	4.48	652-608	652-608-1
.2874	2.598	2.992	.3150	1.4173	4.48	652-610	652-610-1
.2913	2.598	2.992	.3150	1.4173	4.48	652-612	652-612-1
.2953	2.598	2.992	.3150	1.4173	4.48	652-614	652-614-1
19/64	2.598	2.992	.3150	1.4173	4.48	652-616	652-616-1
.2992	2.598	2.992	.3150	1.4173	4.48	652-618	652-618-1
.3031	2.598	2.992	.3150	1.4173	4.48	652-620	652-620-1
.3071	2.598	2.992	.3150	1.4173	4.48	652-622	652-622-1
.3110	2.598	2.992	.3150	1.4173	4.48	652-624	652-624-1
5/16	2.598	2.992	.3150	1.4173	4.48	652-626	652-626-1
.3150	2.598	2.992	.3150	1.4173	4.48	652-628	652-628-1
.3189	3.346	3.740	.3937	1.771	5.59	652-630	652-630-1
.3228	3.346	3.740	.3937	1.771	5.59	652-632	652-632-1

High Performance Drills


HURRICANE DRILLS - 8xD



HIGH PERFORMANCE DRILLS


8xD, Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

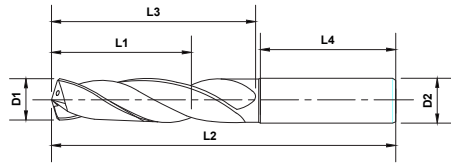- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated	PowerA
D1	L1	L3	D2	L4	L2	Coolant Through	Coolant Through
.3268	3.346	3.740	.3937	1.771	5.59	652-634	652-634-1
21/64	3.346	3.740	.3937	1.771	5.59	652-636	652-636-1
.3307	3.346	3.740	.3937	1.771	5.59	652-638	652-638-1
.3346	3.346	3.740	.3937	1.771	5.59	652-640	652-640-1
.3386	3.346	3.740	.3937	1.771	5.59	652-642	652-642-1
.3425	3.346	3.740	.3937	1.771	5.59	652-644	652-644-1
11/32	3.346	3.740	.3937	1.771	5.59	652-646	652-646-1
.3465	3.346	3.740	.3937	1.771	5.59	652-648	652-648-1
.3504	3.346	3.740	.3937	1.771	5.59	652-650	652-650-1
.3543	3.346	3.740	.3937	1.771	5.59	652-652	652-652-1
.3583	3.346	3.740	.3937	1.771	5.59	652-654	652-654-1
23/64	3.346	3.740	.3937	1.771	5.59	652-656	652-656-1
.3622	3.346	3.740	.3937	1.771	5.59	652-658	652-658-1
.3661	3.346	3.740	.3937	1.771	5.59	652-660	652-660-1
.3701	3.346	3.740	.3937	1.771	5.59	652-662	652-662-1
.3740	3.346	3.740	.3937	1.771	5.59	652-664	652-664-1
.3748	3.346	3.740	.3937	1.771	5.59	652-666	652-666-1
3/8	3.346	3.740	.3937	1.771	5.59	652-668	652-668-1
.3780	3.346	3.740	.3937	1.771	5.59	652-670	652-670-1
.3819	3.346	3.740	.3937	1.771	5.59	652-672	652-672-1
.3858	3.346	3.740	.3937	1.771	5.59	652-674	652-674-1
.3898	3.346	3.740	.3937	1.771	5.59	652-676	652-676-1
25/64	3.346	3.740	.3937	1.771	5.59	652-678	652-678-1
.3937	3.346	3.740	.3937	1.771	5.59	652-680	652-680-1
.3976	3.897	4.488	.4724	1.810	6.37	652-682	652-682-1
.4016	3.897	4.488	.4724	1.810	6.37	652-684	652-684-1
.4055	3.897	4.488	.4724	1.810	6.37	652-686	652-686-1
13/32	3.897	4.488	.4724	1.810	6.37	652-688	652-688-1
.4094	3.897	4.488	.4724	1.810	6.37	652-690	652-690-1
.4134	3.897	4.488	.4724	1.810	6.37	652-692	652-692-1
.4173	3.897	4.488	.4724	1.810	6.37	652-694	652-694-1
.4213	3.897	4.488	.4724	1.810	6.37	652-696	652-696-1
.4218	3.897	4.488	.4724	1.810	6.37	652-698	652-698-1
.4252	3.897	4.488	.4724	1.810	6.37	652-700	652-700-1
.4291	3.897	4.488	.4724	1.810	6.37	652-702	652-702-1


HURRICANE DRILLS - 8xD



HIGH PERFORMANCE DRILLS

8xD, Coolant Through • 2 FL, 140° Point and 30° Helix • Coated and Uncoated

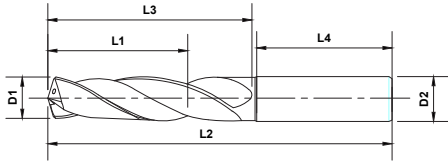- High Performance A-Gr-SiV submicron grain carbide
- Coolant and non-coolant through
- Rigid design for fast feed rates
- MAP certified quality



OD	LOC	LOF	SHK	SHK-L	OAL	Uncoated	PowerA
D1	L1	L3	D2	L4	L2	Coolant Through	Coolant Through
.4331	3.897	4.488	.4724	1.810	6.37	652-704	652-704-1
.4370	3.897	4.488	.4724	1.810	6.37	652-706	652-706-1
7/16	3.897	4.488	.4724	1.810	6.37	652-708	652-708-1
.4409	3.897	4.488	.4724	1.810	6.37	652-710	652-710-1
.4449	3.897	4.488	.4724	1.810	6.37	652-712	652-712-1
.4488	3.897	4.488	.4724	1.810	6.37	652-714	652-714-1
.4528	3.897	4.488	.4724	1.810	6.37	652-716	652-716-1
.4531	3.897	4.488	.4724	1.810	6.37	652-718	652-718-1
.4567	3.897	4.488	.4724	1.810	6.37	652-720	652-720-1
.4606	3.897	4.488	.4724	1.810	6.37	652-722	652-722-1
.4646	3.897	4.488	.4724	1.810	6.37	652-724	652-724-1
.4685	3.897	4.488	.4724	1.810	6.37	652-726	652-726-1
15/32	3.897	4.488	.4724	1.810	6.37	652-728	652-728-1
.4724	3.897	4.488	.4724	1.810	6.37	652-730	652-730-1
31/64	3.897	4.488	.5512	1.850	6.37	652-732	652-732-1
.4921	4.566	5.236	.5512	1.850	7.16	652-734	652-734-1
1/2	4.566	5.236	.5512	1.850	7.16	652-736	652-736-1
.5118	4.566	5.236	.5512	1.850	7.16	652-738	652-738-1
.5315	4.566	5.236	.5512	1.850	7.16	652-740	652-740-1
.5512	4.566	5.236	.5512	1.850	7.16	652-742	652-742-1
.5709	5.196	5.984	.6299	1.969	8.03	652-744	652-744-1
.5906	5.196	5.984	.6299	1.969	8.03	652-746	652-746-1
.6102	5.196	5.984	.6299	1.969	8.03	652-748	652-748-1
.6299	5.196	5.984	.6299	1.969	8.03	652-750	652-750-1
.6496	5.886	6.732	.7087	1.969	8.77	652-752	652-752-1
.6693	5.886	6.732	.7087	1.969	8.77	652-754	652-754-1
.6890	5.886	6.732	.7087	1.969	8.77	652-756	652-756-1
.7087	5.886	6.732	.7087	1.969	8.77	652-758	652-758-1
.7283	6.535	7.480	.7874	2.047	9.60	652-760	652-760-1
.7480	6.535	7.480	.7874	2.047	9.60	652-762	652-762-1
3/4	6.535	7.480	.7874	2.047	9.60	652-764	652-764-1
.7677	6.535	7.480	.7874	2.047	9.60	652-766	652-766-1
.7874	6.535	7.480	.7874	2.047	9.60	652-768	652-768-1

CHUCKING REAMERS

Solid Carbide

- 45° Corner Lead
- Four or Six Flutes

ISO 9001:2015
CERTIFIED



In 2003, Mastercut Tool Corp. successfully achieved registration under ISO 9001:2000 and has maintained our quality system to our current ISO 9001:2015 certification and Lean Six Sigma practices. We maintain these strict standards to further guarantee that every tool you buy from Mastercut Tool Corp. is of the highest quality.



ISO 9001:2015
CERTIFIED



TABLE OF CONTENTS



Straight Flute Reamers - 4 Flute 156

Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
---------------	----------------	---------------	------------------	----------------	------------






Straight Flute Reamers - 6 Flute 157

Hardened H	Cast Iron K	Titanium S	Non-Ferrous N	Stainless M	Steel P
---------------	----------------	---------------	------------------	----------------	------------

General Purpose ferrous and non-ferrous compatible. Right hand cutting.

Features Legend


	4 Flutes
	6 Flutes
	Plain shank

Mastercut's Superior Carbide Blend – *A-Gr-SiV* (Active Grain Sized Volume)

Our superior tungsten carbide gives you the ability to be *aggressive* when you need to be. Growth inhibitors in our sub-micron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.



Please contact us for our full line of metric products.

CHUCKING REAMERS - STRAIGHT FLUTE



45° Corner Chamfer

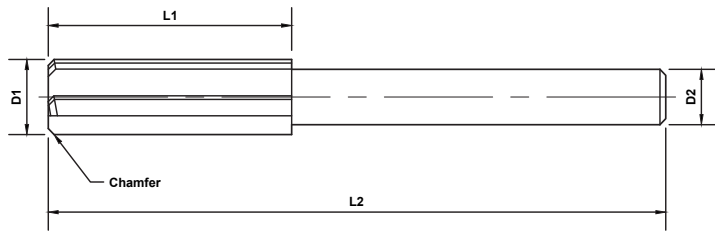- Genuine A-Gr-SiV submicron grain carbide
- Proven, versatile performance
- MAP certified quality




4 Flutes, Series 645



6 Flutes, Series 645

4 FLUTE REAMERS




OD	LOC	SHK	OAL		
D1	L1	D2	L2	Flutes	Uncoated
.1250	5/8	7/64	2-1/4	4	645-151
.1285	3/4	1/8	2-1/2	4	645-159
.1290	3/4	1/8	2-1/2	4	645-160
.1360	3/4	1/8	2-1/2	4	645-174
.1378	3/4	1/8	2-1/2	4	645-178
.1405	3/4	1/8	2-1/2	4	645-185
.1406	3/4	1/8	2-1/2	4	645-186
.1440	3/4	1/8	2-1/2	4	645-193
.1470	3/4	9/64	2-1/2	4	645-199
.1495	3/4	9/64	2-1/2	4	645-204
.1520	3/4	9/64	2-1/2	4	645-209
.1540	3/4	9/64	2-1/2	4	645-213
.1562	3/4	9/64	2-1/2	4	645-218
.1570	3/4	9/64	2-1/2	4	645-220
.1575	3/4	9/64	2-1/2	4	645-221


OD	LOC	SHK	OAL		
D1	L1	D2	L2	Flutes	Uncoated
.1590	3/4	9/64	2-1/2	4	645-224
.1595	7/8	5/32	2-3/4	4	645-225
.1610	7/8	5/32	2-3/4	4	645-229
.1660	7/8	5/32	2-3/4	4	645-239
.1695	7/8	5/32	2-3/4	4	645-246
.1719	7/8	5/32	2-3/4	4	645-251
.1730	7/8	5/32	2-3/4	4	645-254
.1770	7/8	11/64	2-3/4	4	645-263
.1772	7/8	11/64	2-3/4	4	645-264
.1800	7/8	11/64	2-3/4	4	645-270
.1820	7/8	11/64	2-3/4	4	645-274
.1850	7/8	11/64	2-3/4	4	645-280
.1875	7/8	11/64	2-3/4	4	645-287
.1890	7/8	11/64	2-3/4	4	645-292
.1910	7/8	11/64	2-3/4	4	645-296

Call for other available sizes

CHUCKING REAMERS - STRAIGHT FLUTE



45° Corner Chamfer

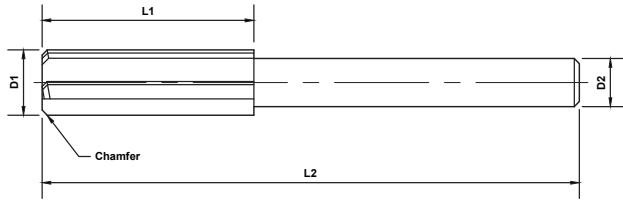

- Genuine A-Gr-SIV submicron grain carbide
- Proven, versatile performance
- MAP certified quality

6 FLUTE REAMERS



OD	LOC	SHK	OAL		
D1	L1	D2	L2	Flutes	Uncoated
.1935	1	3/16	3	6	645-301
.1960	1	3/16	3	6	645-306
.1968	1	3/16	3	6	645-308
.1990	1	3/16	3	6	645-313
.2010	1	3/16	3	6	645-317
.2031	1	3/16	3	6	645-322
.2040	1	3/16	3	6	645-324
.2055	1	3/16	3	6	645-327
.2090	1	3/16	3	6	645-334
.2130	1	3/16	3	6	645-342
.2165	1	3/16	3	6	645-349
.2188	1	3/16	3	6	645-355
.2210	1	3/16	3	6	645-360
.2280	1	7/32	3	6	645-374
.2340	1	7/32	3	6	645-386
.2344	1	7/32	3	6	645-387
.2362	1	7/32	3	6	645-392
.2380	1	7/32	3	6	645-396
.2420	1	7/32	3	6	645-405
.2460	1	7/32	3	6	645-413
.2500	1	7/32	3	6	645-421
.2559	1-1/8	1/4	3-1/4	6	645-435
.2570	1-1/8	1/4	3-1/4	6	645-438
.2610	1-1/8	1/4	3-1/4	6	645-446
.2656	1-1/8	1/4	3-1/4	6	645-456
.2660	1-1/8	1/4	3-1/4	6	645-457
.2720	1-1/8	1/4	3-1/4	6	645-469
.2756	1-1/8	1/4	3-1/4	6	645-477
.2770	1-1/8	1/4	3-1/4	6	645-480
.2810	1-1/8	1/4	3-1/4	6	645-488
.2812	1-1/8	1/4	3-1/4	6	645-489
.2900	1-1/8	9/32	3-1/4	6	645-509
.2950	1-1/8	9/32	3-1/4	6	645-519
.2953	1-1/8	9/32	3-1/4	6	645-520

OD	LOC	SHK	OAL		
D1	L1	D2	L2	Flutes	Uncoated
.2969	1-1/8	9/32	3-1/4	6	645-524
.3020	1-1/8	9/32	3-1/4	6	645-535
.3125	1-1/8	9/32	3-1/4	6	645-556
.3150	1-1/8	9/32	3-1/4	6	645-561
.3160	1-1/8	9/32	3-1/4	6	645-563
.3230	1-1/4	5/16	3-1/2	6	645-578
.3281	1-1/4	5/16	3-1/2	6	645-589
.3320	1-1/4	5/16	3-1/2	6	645-597
.3346	1-1/4	5/16	3-1/2	6	645-603
.3390	1-1/4	5/16	3-1/2	6	645-612
.3438	1-1/4	5/16	3-1/2	6	645-622
.3480	1-1/4	5/16	3-1/2	6	645-631
.3580	1-1/4	11/32	3-1/2	6	645-652
.3594	1-1/4	11/32	3-1/2	6	645-655
.3680	1-1/4	11/32	3-1/2	6	645-674
.3740	1-1/4	11/32	3-1/2	6	645-686
.3750	1-1/4	11/32	3-1/2	6	645-688
.3770	1-1/4	11/32	3-1/2	6	645-692
.3840	1-1/2	3/8	4	6	645-706
.3860	1-1/2	3/8	4	6	645-710
25/64	1-1/2	3/8	4	6	645-719
.3937	1-1/2	3/8	4	6	645-720
.3960	1-1/2	3/8	4	6	645-721
13/32	1-1/2	3/8	4	6	645-722
.4134	1-1/2	13/32	4	6	645-723
27/64	1-1/2	13/32	4	6	645-724
.4331	1-1/2	13/32	4	6	645-725
7/16	1-1/2	13/32	4	6	645-726
.4528	1-1/2	7/16	4	6	645-727
29/64	1-1/2	7/16	4	6	645-728
15/32	1-1/2	7/16	4	6	645-729
.4724	1-1/2	7/16	4	6	645-730
31/64	1-1/2	15/32	4	6	645-732
1/2	1-1/2	15/32	4	6	645-734

Reamers





















BURS

- **Full Line of Shapes and Cut Types**
- **Special Purpose and Custom Burs Available**

Mastercut's proprietary brazing process gives our burs the extra strength you need to push harder and run faster.



TABLE OF CONTENTS

	SA Burs - Cylindrical Shape, No Endcut	160	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SB Burs - Cylindrical Shape with End Cut	161	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SC Burs - Radius Cylindrical Shape	162	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SD Burs - Ball Shape	163	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SE Burs - Oval Shape	164	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SF Burs - Radius Tree Shape	165	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SG Burs - Pointed Tree Shape.	166	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SH Burs - Flame Shape	167	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SJ Burs - 60° Included Cone Shape	168	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SK Burs - 90° Included Cone Shape	169	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SL Burs - Radius Cone Shape	170	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SM Burs - Pointed Cone Shape.	171	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	SN Burs - Inverted Cone Shape	172	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	Die Mills	173	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	Piloted Die Mills	173	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	Fiberglass Routers	174	Fiberglass	Graphite	Composite	Carbon Fiber	Honeycomb		
	Tire Burs	175	NA						
	8-12 Piece Plastic Box Bur Sets	176	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	3-5 Piece Power Pouch Bur Sets	176	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel
	24 Piece Countertop Displays	177	Cermet	Hardened	Cast Iron	Titanium	Non-Ferrous	Stainless	Steel


General Bur Speed Recommendations

The following chart is a general and approximate recommendation. Variations to achieve desired results may be necessary. Long shank burs should be used at reduced speeds.

Bur Diameter	RPM
1/8" or 3mm Solid Carbide	45,000-50,000
3/16" or 5mm Solid Carbide	35,000-40,000
3/16" or 5mm Carbide Head Brazed to 1/8" or 3mm Steel Shank	30,000-35,000
1/4" or 6mm Solid Carbide	30,000-35,000
1/4" or 6mm Carbide Head Brazed to 1/8" or 3mm Steel Shank	25,000-30,000
5/16" or 8mm Carbide Head Brazed to 1/4" or 6mm Steel Shank	25,000-30,000
3/8" or 10mm Carbide Head Brazed to 1/4" or 6mm Steel Shank	25,000-30,000
7/16" or 11mm Carbide Head Brazed to 1/4" or 6mm Steel Shank	20,000-25,000
1/2" or 12mm Carbide Head Brazed to 1/4" or 6mm Steel Shank	20,000-25,000
5/8" or 16mm Carbide Head Brazed to 1/4" or 6mm Steel Shank	15,000-20,000
3/4" or 18mm Carbide Head Brazed to 1/4" or 6mm Steel Shank	15,000-20,000
1" or 25mm Carbide Head on 1/4" or 6mm Steel Shank	12,000-18,000

SA BURS - CYLINDRICAL SHAPE

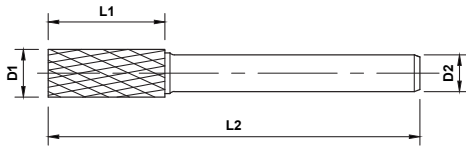Without End Cut



Standard, Singlecut, Series SA-SC



Standard, Doublecut, Series SA-DC



Standard, Alumacut, Series SA-FM



Long, Singlecut, Series SA-SC

Length Key (K)

Standard Long * Solid Carbide

Non-Ferrous **N** Alumacuts recommended for non-ferrous materials


Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

Quick Ship Items


K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/16	1/4	1/8	1-1/2	SA-41SC	SA-41DC	SA-41FM	SA-41DM	SA-41CB
*	3/32	7/16	1/8	1-1/2	SA-42SC	SA-42DC	SA-42FM	SA-42DM	SA-42CB
*	1/8	9/16	1/8	1-1/2	SA-43SC	SA-43DC	SA-43FM	SA-43DM	SA-43CB
*		5/8	1/4	2	SA-12SC	SA-12DC	SA-12FM	SA-12DM	SA-12CB
*	3/16	5/8	1/4	2	SA-14SC	SA-14DC	SA-14FM	SA-14DM	SA-14CB
		1/2	1/8	2	SA-51SC	SA-51DC	SA-51FM	SA-51DM	SA-51CB
*	1/4	5/8	1/4	2	SA-1SC	SA-1DC	SA-1FM	SA-1DM	SA-1CB
		5/8	1/4	6-3/4	SA-1L6SC	SA-1L6DC	SA-1L6FM	SA-1L6DM	SA-1L6CB
	5/16	3/4	1/4	2-1/2	SA-2SC	SA-2DC	SA-2FM	SA-2DM	SA-2CB
	3/8	3/4	1/4	2-1/2	SA-3SC	SA-3DC	SA-3FM	SA-3DM	SA-3CB
		3/4	1/4	6-3/4	SA-3L6SC	SA-3L6DC	SA-3L6FM	SA-3L6DM	SA-3L6CB
	7/16	1	1/4	2-3/4	SA-4SC	SA-4DC	SA-4FM	SA-4DM	SA-4CB
	1/2	1	1/4	2-3/4	SA-5SC	SA-5DC	SA-5FM	SA-5DM	SA-5CB
		1	1/4	7	SA-5L6SC	SA-5L6DC	SA-5L6FM	SA-5L6DM	SA-5L6CB
	5/8	1	1/4	2-3/4	SA-6SC	SA-6DC	SA-6FM	SA-6DM	SA-6CB
	3/4	3/4	1/4	2-1/2	SA-16SC	SA-16DC	SA-16FM	SA-16DM	SA-16CB
		1	1/4	2-3/4	SA-7SC	SA-7DC	SA-7FM	SA-7DM	SA-7CB
	1	1	1/4	2-3/4	SA-9SC	SA-9DC	SA-9FM	SA-9DM	SA-9CB

SB BURS - CYLINDRICAL SHAPE

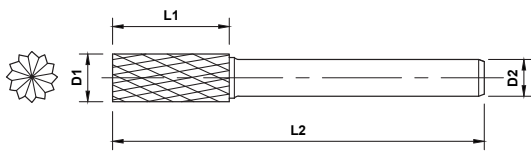
With End Cut



Standard, Singlecut, Series SB-SC



Standard, Doublecut, Series SB-DC



Standard, Alumacut, Series SB-FM



Long, Singlecut, Series SB-SC

Length Key (K)

Standard Long * Solid Carbide


Non-Ferrous N Alumacuts recommended for non-ferrous materials

Cast Iron K Titanium S Stainless M Steel P Hardened H

Quick Ship Items

	OD	LOC	SHK	OAL	Cut Type				
K	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/16	1/4	1/8	1-1/2	SB-41SC	SB-41DC	SB-41FM	SB-41DM	SB-41CB
*	3/32	7/16	1/8	1-1/2	SB-42SC	SB-42DC	SB-42FM	SB-42DM	SB-42CB
*	1/8	9/16	1/8	1-1/2	SB-43SC	SB-43DC	SB-43FM	SB-43DM	SB-43CB
*		5/8	1/4	2	SB-12SC	SB-12DC	SB-12FM	SB-12DM	SB-12CB
*	3/16	5/8	1/4	2	SB-14SC	SB-14DC	SB-14FM	SB-14DM	SB-14CB
		3/16	1/8	2-15/16	SB-51SC	SB-51DC	SB-51FM	SB-51DM	SB-51CB
*	1/4	5/8	1/4	2	SB-1SC	SB-1DC	SB-1FM	SB-1DM	SB-1CB
		5/8	1/4	6-3/4	SB-1L6SC	SB-1L6DC	SB-1L6FM	SB-1L6DM	SB-1L6CB
	5/16	3/4	1/4	2-1/2	SB-2SC	SB-2DC	SB-2FM	SB-2DM	SB-2CB
	3/8	3/4	1/4	2-1/2	SB-3SC	SB-3DC	SB-3FM	SB-3DM	SB-3CB
		3/4	1/4	6-3/4	SB-3L6SC	SB-3L6DC	SB-3L6FM	SB-3L6DM	SB-3L6CB
	7/16	1	1/4	2-3/4	SB-4SC	SB-4DC	SB-4FM	SB-4DM	SB-4CB
	1/2	1	1/4	2-3/4	SB-5SC	SB-5DC	SB-5FM	SB-5DM	SB-5CB
		1	1/4	7	SB-5L6SC	SB-5L6DC	SB-5L6FM	SB-5L6DM	SB-5L6CB
	5/8	1	1/4	2-3/4	SB-6SC	SB-6DC	SB-6FM	SB-6DM	SB-6CB
	3/4	3/4	1/4	2-1/2	SB-16SC	SB-16DC	SB-16FM	SB-16DM	SB-16CB
		1	1/4	2-3/4	SB-7SC	SB-7DC	SB-7FM	SB-7DM	SB-7CB
	1	1	1/4	2-3/4	SB-9SC	SB-9DC	SB-9FM	SB-9DM	SB-9CB

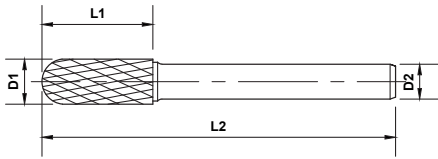SC BURS - RADIUS CYLINDRICAL SHAPE



Standard, Singlecut, Series SC-SC



Standard, Doublecut, Series SC-DC



Standard, Alumacut, Series SC-FM Series



Long, Series , Singlecut SC-SC

Length Key (K)

Standard Long * Solid Carbide


Non-Ferrous **N** Alumacuts recommended for non-ferrous materials

Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

Quick Ship Items

K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	3/32	7/16	1/8	1-1/2	SC-41SC	SC-41DC	SC-41FM	SC-41DM	SC-41CB
*	1/8	9/16	1/8	1-1/2	SC-42SC	SC-42DC	SC-42FM	SC-42DM	SC-42CB
*		5/8	1/4	2	SC-12SC	SC-12DC	SC-12FM	SC-12DM	SC-12CB
*	3/16	5/8	1/4	2	SC-14SC	SC-14DC	SC-14FM	SC-14DM	SC-14CB
*		1/2	1/8	2	SC-51SC	SC-51DC	SC-51FM	SC-51DM	SC-51CB
*	1/4	5/8	1/4	2	SC-1SC	SC-1DC	SC-1FM	SC-1DM	SC-1CB
*		5/8	1/4	6-3/4	SC-1L6SC	SC-1L6DC	SC-1L6FM	SC-1L6DM	SC-1L6CB
	5/16	3/4	1/4	2-1/2	SC-2SC	SC-2DC	SC-2FM	SC-2DM	SC-2CB
	3/8	3/4	1/4	2-1/2	SC-3SC	SC-3DC	SC-3FM	SC-3DM	SC-3CB
		3/4	1/4	6-3/4	SC-3L6SC	SC-3L6DC	SC-3L6FM	SC-3L6DM	SC-3L6CB
	7/16	1	1/4	2-3/4	SC-4SC	SC-4DC	SC-4FM	SC-4DM	SC-4CB
	1/2	1	1/4	2-3/4	SC-5SC	SC-5DC	SC-5FM	SC-5DM	SC-5CB
		1	1/4	7	SC-5L6SC	SC-5L6DC	SC-5L6FM	SC-5L6DM	SC-5L6CB
	5/8	1	1/4	2-3/4	SC-6SC	SC-6DC	SC-6FM	SC-6DM	SC-6CB
		1	1/4	7	SC-6L6SC	SC-6L6DC	SC-6L6FM	SC-6L6DM	SC-6L6CB
	3/4	1	1/4	2-3/4	SC-7SC	SC-7DC	SC-7FM	SC-7DM	SC-7CB

SD BURS - BALL SHAPE



Standard, Singlecut SD-SC Series



Standard, Doublecut SD-DC Series



Standard, Alumacut SD-FM Series



Long, Singlecut SD-SC Series

Length Key (K)

Standard Long * Solid Carbide

Alumacuts recommended for non-ferrous materials


Non-Ferrous N

Cast Iron K Titanium S Stainless M Steel P Hardened H

Quick Ship Items

K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	3/32	3/32	1/8	1-1/2	SD-41SC*	SD-41DC*	SD-41FM*	SD-41DM*	SD-41CB*
*	1/8	1/8	1/8	1-1/2	SD-42SC*	SD-42DC*	SD-42FM*	SD-42DM*	SD-42CB*
*		3/32	1/4	2	SD-12SC*	SD-12DC*	SD-12FM*	SD-12DM*	SD-12CB*
*	3/16	1/8	1/4	2	SD-14SC*	SD-14DC*	SD-14FM*	SD-14DM*	SD-14CB*
*		7/32	1/8	1-3/4	SD-51SC	SD-51DC	SD-51FM	SD-51DM	SD-51CB
*	1/4	7/32	1/4	2	SD-1SC*	SD-1DC*	SD-1FM*	SD-1DM*	SD-1CB*
		7/32	1/4	6-3/4	SD-1L6SC	SD-1L6DC	SD-1L6FM	SD-1L6DM	SD-1L6CB
	5/16	1/4	1/4	2-1/16	SD-2SC	SD-2DC	SD-2FM	SD-2DM	SD-2CB
		5/16	1/4	2-1/8	SD-3SC	SD-3DC	SD-3FM	SD-3DM	SD-3CB
	3/8	5/16	1/4	6-3/8	SD-3L6SC	SD-3L6DC	SD-3L6FM	SD-3L6DM	SD-3L6CB
		7/16	3/8	1/4	2-3/16	SD-4SC	SD-4DC	SD-4FM	SD-4DM
	1/2	7/16	1/4	2-1/4	SD-5SC	SD-5DC	SD-5FM	SD-5DM	SD-5CB
		7/16	1/4	6-1/2	SD-5L6SC	SD-5L6DC	SD-5L6FM	SD-5L6DM	SD-5L6CB
	5/8	9/16	1/4	2-3/8	SD-6SC	SD-6DC	SD-6FM	SD-6DM	SD-6CB
	3/4	11/16	1/4	2-1/2	SD-7SC	SD-7DC	SD-7FM	SD-7DM	SD-7CB
	1	15/16	1/4	2-3/4	SD-9SC	SD-9DC	SD-9FM	SD-9DM	SD-9CB

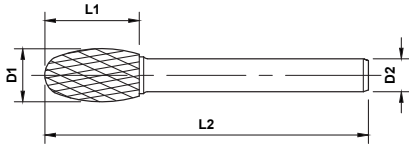SE BURS - OVAL SHAPE



Standard, Singlecut, Series SE-SC



Standard, Doublecut, Series SE-DC



Standard, Alumacut, Series SE-FM



Long, Singlecut, Series SE-SC

Length Key (K)

Standard Long * Solid Carbide


Non-Ferrous **N** Alumacuts recommended for non-ferrous materials

Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

Quick Ship Items

K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	7/32	1/8	1-1/2	SE-41SC	SE-41DC	SE-41FM	SE-41DM	SE-41CB
		3/8	1/8	1-3/4	SE-51SC	SE-51DC	SE-51FM	SE-51DM	SE-51CB
*	1/4	3/8	1/4	2	SE-1SC	SE-1DC	SE-1FM	SE-1DM	SE-1CB
		3/8	1/4	6-3/4	SE-1L6SC	SE-1L6DC	SE-1L6FM	SE-1L6DM	SE-1L6CB
	3/8	5/8	1/4	2-3/8	SE-3SC	SE-3DC	SE-3FM	SE-3DM	SE-3CB
		5/8	1/4	6-5/8	SE-3L6SC	SE-3L6DC	SE-3L6FM	SE-3L6DM	SE-3L6CB
	1/2	7/8	1/4	2-5/8	SE-5SC	SE-5DC	SE-5FM	SE-5DM	SE-5CB
		7/8	1/4	6-7/8	SE-5L6SC	SE-5L6DC	SE-5L6FM	SE-5L6DM	SE-5L6CB
	5/8	1	1/4	2-3/4	SE-6SC	SE-6DC	SE-6FM	SE-6DM	SE-6CB
		3/4	1	2-3/4	SE-7SC	SE-7DC	SE-7FM	SE-7DM	SE-7CB

SF BURS - RADIUS TREE SHAPE



Standard, Singlecut, Series SF-SC



Standard, Doublecut, Series SF-DC



Standard, Alumacut, Series SF-FM



Long, Singlecut, Series SF-SC

Length Key (K)

Standard Long * Solid Carbide

Non-Ferrous **N** Alumacuts recommended for non-ferrous materials


Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

Quick Ship Items

K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	1/4	1/8	1-1/2	SF-41SC	SF-41DC	SF-41FM	SF-41DM	SF-41CB
		1/2	1/8	1-1/2	SF-42SC	SF-42DC	SF-42FM	SF-42DM	SF-42CB
		1/2	1/4	2	SF-12SC	SF-12DC	SF-12FM	SF-12DM	SF-12CB
*	1/4	1/2	1/8	2	SF-51SC	SF-51DC	SF-51FM	SF-51DM	SF-51CB
		5/8	1/4	2	SF-1SC	SF-1DC	SF-1FM	SF-1DM	SF-1CB
		5/8	1/4	6-3/4	SF-1L6SC	SF-1L6DC	SF-1L6FM	SF-1L6DM	SF-1L6CB
	3/8	3/4	1/4	2-1/2	SF-3SC	SF-3DC	SF-3FM	SF-3DM	SF-3CB
		3/4	1/4	6-3/4	SF-3L6SC	SF-3L6DC	SF-3L6FM	SF-3L6DM	SF-3L6CB
	7/16	1	1/4	2-3/4	SF-4SC	SF-4DC	SF-4FM	SF-4DM	SF-4CB
		3/4	1/4	2-1/2	SF-13SC	SF-13DC	SF-13FM	SF-13DM	SF-13CB
		1	1/4	2-3/4	SF-5SC	SF-5DC	SF-5FM	SF-5DM	SF-5CB
	1/2	1	1/4	7	SF-5L6SC	SF-5L6DC	SF-5L6FM	SF-5L6DM	SF-5L6CB
		1	1/4	2-3/4	SF-6SC	SF-6DC	SF-6FM	SF-6DM	SF-6CB
		1	1/4	2-3/4	SF-7SC	SF-7DC	SF-7FM	SF-7DM	SF-7CB
	3/4	1-1/4	1/4	3	SF-14SC	SF-14DC	SF-14FM	SF-14DM	SF-14CB
		1-1/2	1/4	3-1/4	SF-15SC	SF-15DC	SF-15FM	SF-15DM	SF-15CB

Burs

SG BURS - POINTED TREE SHAPE



Standard, Singlecut, Series SG-SC



Standard, Doublecut, Series SG-DC



Standard, Alumacut, Series SG-FM



Long, Singlecut, Series SG-SC

Length Key (K)

Standard Long * Solid Carbide


Non-Ferrous **N** Alumacuts recommended for non-ferrous materials

Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

Quick Ship Items

	OD	LOC	SHK	OAL	Cut Type				
K	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	1/4	1/8	1-1/2	SG-41SC	SG-41DC	SG-41FM	SG-41DM	SG-41CB
*		3/8	1/8	1-1/2	SG-43SC	SG-43DC	SG-43FM	SG-43DM	SG-43CB
*		1/2	1/8	1-1/2	SG-44SC	SG-44DC	SG-44FM	SG-44DM	SG-44CB
*	1/4	1/2	1/8	2	SG-51SC	SG-51DC	SG-51FM	SG-51DM	SG-51CB
		5/8	1/4	2	SG-1SC	SG-1DC	SG-1FM	SG-1DM	SG-1CB
	5/16	5/8	1/4	6-3/4	SG-1L6SC	SG-1L6DC	SG-1L6FM	SG-1L6DM	SG-1L6CB
		3/4	1/4	2-1/2	SG-2SC	SG-2DC	SG-2FM	SG-2DM	SG-2CB
	3/8	3/4	1/4	2-1/2	SG-3SC	SG-3DC	SG-3FM	SG-3DM	SG-3CB
		3/4	1/4	6-3/4	SG-3L6SC	SG-3L6DC	SG-3L6FM	SG-3L6DM	SG-3L6CB
	1/2	3/4	1/4	2-1/2	SG-13SC	SG-13DC	SG-13FM	SG-13DM	SG-13CB
		1	1/4	2-3/4	SG-5SC	SG-5DC	SG-5FM	SG-5DM	SG-5CB
	5/8	1	1/4	7	SG-5L6SC	SG-5L6DC	SG-5L6FM	SG-5L6DM	SG-5L6CB
		1	1/4	2-3/4	SG-6SC	SG-6DC	SG-6FM	SG-6DM	SG-6CB
	3/4	1	1/4	2-3/4	SG-7SC	SG-7DC	SG-7FM	SG-7DM	SG-7CB
		1-1/2	1/4	3-1/4	SG-15SC	SG-15DC	SG-15FM	SG-15DM	SG-15CB

SH BURS - FLAME SHAPE



Standard, Singlecut, Series SH-SC



Standard, Doublecut, Series SH-DC



Standard, Alumacut, Series SH-FM



Long, Singlecut, Series SH-SC

Length Key (K)

Standard Long * Solid Carbide

Quick Ship Items


Alumacuts recommended for non-ferrous materials

Non-Ferrous **N**

Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	1/4	1/8	1-1/2	SH-41SC	SH-41DC	SH-41FM	SH-41DM	SH-41CB
*	1/4	1/2	1/4	2	SH-1SC	SH-1DC	SH-1FM	SH-1DM	SH-1CB
		1/2	1/4	6-3/4	SH-1L6SC	SH-1L6DC	SH-1L6FM	SH-1L6DM	SH-1L6CB
	5/16	3/4	1/4	2-1/2	SH-2SC	SH-2DC	SH-2FM	SH-2DM	SH-2CB
		3/4	1/4	6	SH-2L6SC	SH-2L6DC	SH-2L6FM	SH-2L6DM	SH-2L6CB
	1/2	1-1/4	1/4	3	SH-5SC	SH-5DC	SH-5FM	SH-5DM	SH-5CB
		1-1/4	1/4	7-1/4	SH-5L6SC	SH-5L6DC	SH-5L6FM	SH-5L6DM	SH-5L6CB
	5/8	1-7/16	1/4	3-3/16	SH-6SC	SH-6DC	SH-6FM	SH-6DM	SH-6CB
	3/4	1-5/8	1/4	3-3/8	SH-7SC	SH-7DC	SH-7FM	SH-7DM	SH-7CB

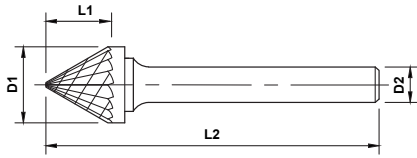SJ BURS - 60° INCLUDED CONE SHAPE



Standard, Singlecut Series SJ-SC



Standard, Doublecut Series SJ-DC



Standard, Alumacut Series SJ-FM

Non-Ferrous **N** Alumacuts recommended for non-ferrous materials

Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**



Length Key (K)

Standard Long * Solid Carbide

K	OD	LOC	SHK	OAL	Cut Type				
					Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	3/32	1/8	1-1/2	SJ-42SC	SJ-42DC	SJ-42FM	SJ-42DM	SJ-42CB
		3/32	1/8	1-1/2	SJ-42DESC ^	SJ-42DEDC ^	SJ-42DEFM ^	SJ-42DEDM ^	SJ-42DECB ^
*	3/16	3/16	3/16	2	SJ-81SC	SJ-81DC	SJ-81FM	SJ-81DM	SJ-81CB
*	1/4	3/16	1/4	2	SJ-1SC	SJ-1DC	SJ-1FM	SJ-1DM	SJ-1CB
		3/16	1/4	2	SJ-1DESC ^	SJ-1DEDC ^	SJ-1DEFM ^	SJ-1DEDM ^	SJ-1DECB ^
*	5/16	5/16	1/4	2-1/16	SJ-2SC	SJ-2DC	SJ-2FM	SJ-2DM	SJ-2CB
*	3/8	5/16	1/4	2-1/16	SJ-3SC	SJ-3DC	SJ-3FM	SJ-3DM	SJ-3CB
*	1/2	7/16	1/4	2-3/16	SJ-5SC	SJ-5DC	SJ-5FM	SJ-5DM	SJ-5CB
*	5/8	9/16	1/4	2-5/16	SJ-6SC	SJ-6DC	SJ-6FM	SJ-6DM	SJ-6CB
*	3/4	11/16	1/4	2-7/16	SJ-7SC	SJ-7DC	SJ-7FM	SJ-7DM	SJ-7CB
*	1	15/16	1/4	2-9/16	SJ-9SC	SJ-9DC	SJ-9FM	SJ-9DM	SJ-9CB

^ Denotes Double End

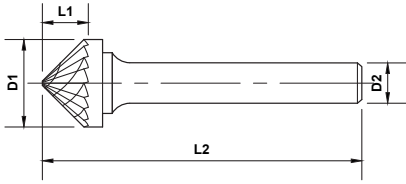SK BURS - 90° INCLUDED CONE SHAPE



Standard, Singlecut SK-SC Series



Standard, Doublecut SK-DC Series



Standard, Alumacut SK-FM Series

Non-Ferrous **N** Alumacuts recommended for non-ferrous materials

Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**


Length Key (K)

Standard Long * Solid Carbide

K	OD	LOC	SHK	OAL	Cut Type				
	D1	L1	D2	L2	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	1/16	1/8	1-1/2	SK-42SC	SK-42DC	SK-42FM	SK-42DM	SK-42CB
		1/16	1/8	1-1/2	SK-42DESC ^	SK-42DEDC ^	SK-42DEFM ^	SK-42DEDM ^	SK-42DECB ^
*	1/4	1/8	1/4	2	SK-1SC	SK-1DC	SK-1FM	SK-1DM	SK-1CB
		1/8	1/4	2	SK-1DESC ^	SK-1DEDC ^	SK-1DEFM ^	SK-1DEDM ^	SK-1DECB ^
	5/16	3/16	1/4	1-15/16	SK-2SC	SK-2DC	SK-2FM	SK-2DM	SK-2CB
	3/8	3/16	1/4	1-15/16	SK-3SC	SK-3DC	SK-3FM	SK-3DM	SK-3CB
	7/16	1/4	1/4	2	SK-4SC	SK-4DC	SK-4FM	SK-4DM	SK-4CB
	1/2	1/4	1/4	2	SK-5SC	SK-5DC	SK-5FM	SK-5DM	SK-5CB
	5/8	5/16	1/4	2-1/16	SK-6SC	SK-6DC	SK-6FM	SK-6DM	SK-6CB
	3/4	3/8	1/4	2-1/8	SK-7SC	SK-7DC	SK-7FM	SK-7DM	SK-7CB
	1	1/2	1/4	2-1/4	SK-9SC	SK-9DC	SK-9FM	SK-9DM	SK-9CB

^ Denotes Double End

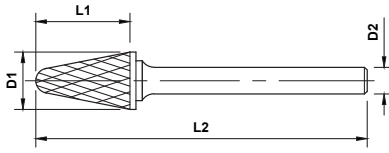SL BURS - RADIUS CONE SHAPE



Standard, Singlecut, Series SL-SC



Standard, Doublecut, Series SL-DC



Standard, Alumacut SL-FM Series



Long, Singlecut, Series SL-SC

Length Key (K)


Standard Long * Solid Carbide

Non-Ferrous N	Alumacuts recommended for non-ferrous materials				
Cast Iron K	Titanium S	Stainless M	Steel P	Hardened H	

Quick Ship Items

K	OD	LOC	SHK	OAL	Angle	Cut Type					
						Inclusive	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	3/8	1/8	1-1/2	8°		SL-41SC	SL-41DC	SL-41FM	SL-41DM	SL-41CB
		1/2	1/8	1-1/2	8°		SL-42SC	SL-42DC	SL-42FM	SL-42DM	SL-42CB
*	1/4	5/8	1/4	2	14°		SL-1SC	SL-1DC	SL-1FM	SL-1DM	SL-1CB
		5/8	1/4	6-3/4	14°		SL-1L6SC	SL-1L6DC	SL-1L6FM	SL-1L6DM	SL-1L6CB
	5/16	7/8	1/4	2-5/8	14°		SL-2SC	SL-2DC	SL-2FM	SL-2DM	SL-2CB
	3/8	1-1/16	1/4	2-13/16	14°		SL-3SC	SL-3DC	SL-3FM	SL-3DM	SL-3CB
		1-1/16	1/4	7-1/16	14°		SL-3L6SC	SL-3L6DC	SL-3L6FM	SL-3L6DM	SL-3L6CB
	1/2	1-1/8	1/4	3-1/64	14°		SL-4SC	SL-4DC	SL-4FM	SL-4DM	SL-4CB
		1-1/8	1/4	7-1/8	14°		SL-4L6SC	SL-4L6DC	SL-4L6FM	SL-4L6DM	SL-4L6CB
	5/8	1-3/16	1/4	2-15/16	14°		SL-5SC	SL-5DC	SL-5FM	SL-5DM	SL-5CB
		1-5/16	1/4	3-1/16	14°		SL-6SC	SL-6DC	SL-6FM	SL-6DM	SL-6CB
	3/4	1-1/2	1/4	3-1/4	14°		SL-7SC	SL-7DC	SL-7FM	SL-7DM	SL-7CB

SM BURS - POINTED CONE SHAPE



Standard, Singlecut, Series SM-SC



Standard, Doublecut, Series SM-DC



Standard, Alumacut, Series SM-FM



Long, Singlecut, Series SM-SC

Length Key (K)

Standard Long * Solid Carbide

Non-Ferrous N Alumacuts recommended for non-ferrous materials


Cast Iron K Titanium S Stainless M Steel P Hardened H

Quick Ship Items

K	OD	LOC	SHK	OAL	Angle	Cut Type				
	D1	L1	D2	L2	Inclusive	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	1/8	11/32	1/8	1-1/2	12°	SM-41SC	SM-41DC	SM-41FM	SM-41DM	SM-41CB
		7/16	1/8	1-1/2	14°	SM-42SC	SM-42DC	SM-42FM	SM-42DM	SM-42CB
		5/8	1/8	1-1/2	7°	SM-43SC	SM-43DC	SM-43FM	SM-43DM	SM-43CB
*	1/4	1/2	1/8	2-1/8	22°	SM-51SC	SM-51DC	SM-51FM	SM-51DM	SM-51CB
		1/2	1/4	2	22°	SM-1SC	SM-1DC	SM-1FM	SM-1DM	SM-1CB
		1/2	1/4	6-3/4	14°	SM-1L6SC	SM-1L6DC	SM-1L6FM	SM-1L6DM	SM-1L6CB
		3/4	1/4	2	14°	SM-2SC	SM-2DC	SM-2FM	SM-2DM	SM-2CB
		3/4	1/4	6-3/4	14°	SM-2L6SC	SM-2L6DC	SM-2L6FM	SM-2L6DM	SM-2L6CB
		1	1/4	2	12°	SM-3SC	SM-3DC	SM-3FM	SM-3DM	SM-3CB
*	3/8	5/8	1/4	2-1/2	28°	SM-4SC	SM-4DC	SM-4FM	SM-4DM	SM-4CB
		5/8	1/4	6-5/8	28°	SM-4L6SC	SM-4L6DC	SM-4L6FM	SM-4L6DM	SM-4L6CB
*	1/2	7/8	1/4	2-3/4	28°	SM-5SC	SM-5DC	SM-5FM	SM-5DM	SM-5CB
		7/8	1/4	6-7/8	14°	SM-5L6SC	SM-5L6DC	SM-5L6FM	SM-5L6DM	SM-5L6CB
*	5/8	1	1/4	2-3/4	31°	SM-6SC	SM-6DC	SM-6FM	SM-6DM	SM-6CB

BURS

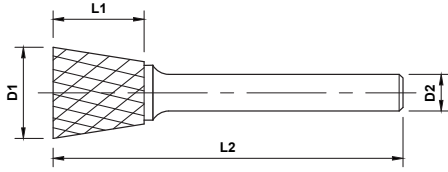SN BURS - INVERTED CONE SHAPE



Standard, Singlecut, Series SN-SC



Standard, Doublecut, Series SN-DC



Standard, Alumacut, Series SN-FM



Long, Singlecut, Series SN-SC

Non-Ferrous **N** Alumacuts recommended for non-ferrous materials


Cast Iron **K** Titanium **S** Stainless **M** Steel **P** Hardened **H**

Length Key (K)


Standard Long * Solid Carbide

	OD	LOC	SHK	OAL	Angle	Cut Type				
K	D1	L1	D2	L2	Inclusive	Singlecut	Doublecut	Alumacut	Diamondcut	Chipbreaker
*	3/32	1/8	1/8	1-1/2	10°	SN-41SC	SN-41DC	SN-41FM	SN-41DM	SN-41CB
*	1/8	3/16	1/8	1-1/2	10°	SN-42SC	SN-42DC	SN-42FM	SN-42DM	SN-42CB
		1/4	1/8	1-3/4	10°	SN-51SC	SN-51DC	SN-51FM	SN-51DM	SN-51CB
*	1/4	5/16	1/4	2	10°	SN-1SC	SN-1DC	SN-1FM	SN-1DM	SN-1CB
		5/16	1/4	6-3/4	10°	SN-1L6SC	SN-1L6DC	SN-1L6FM	SN-1L6DM	SN-1L6CB
	3/8	3/8	1/4	2-1/8	15°	SN-2SC	SN-2DC	SN-2FM	SN-2DM	SN-2CB
		1/2	1/4	2-1/4	12°	SN-3SC	SN-3DC	SN-3FM	SN-3DM	SN-3CB
	1/2	1/2	1/4	2-1/4	28°	SN-4SC	SN-4DC	SN-4FM	SN-4DM	SN-4CB
		1/2	1/4	6-1/2	28°	SN-4L6SC	SN-4L6DC	SN-4L6FM	SN-4L6DM	SN-4L6CB
	5/8	5/8	1/4	2-3/8	18°	SN-5SC	SN-5DC	SN-5FM	SN-5DM	SN-5CB
		3/4	1/4	2-1/2	18°	SN-6SC	SN-6DC	SN-6FM	SN-6DM	SN-6CB
	3/4	5/8	1/4	2-3/8	30°	SN-7SC	SN-7DC	SN-7FM	SN-7DM	SN-7CB


DIE MILLS



Doublecut, Series 28000's



Coarse Doublecut, Series 28000's

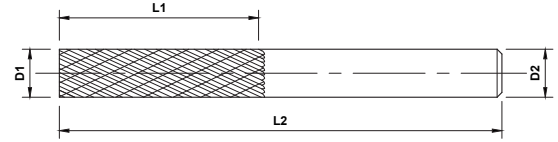



Length Key (K)

Standard Long * Solid Carbide



K	OD	LOC	SHK	OAL	Cut Type	
	D1	L1	D2	L2	Doublecut	Coarse Doublecut
	1/8	1/2	1/8	1-1/2	28000	28020
	5/32	1/2	3/16	2	28100	28120
	3/16	5/8	3/16	2	28200	28220
	1/4	3/4	1/4	2	28300	28320
	5/16	13/16	5/16	2-1/2	28400	28420
	3/8	1	3/8	2-1/2	28500	28520
	7/16	1	7/16	3	28600	28620
	1/2	1	1/2	3	28700	28720

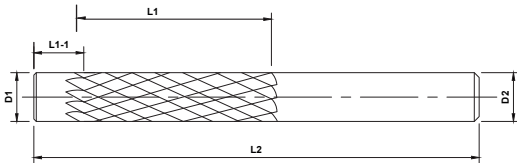PILOTED DIE MILLS



Doublecut, Series 22000's


Length Key (K)

Standard Long * Solid Carbide



K	OD	LOC	Pilot	SHK	OAL	Cut Type	
	D1	L1	L1-1	D2	L2	Doublecut	Singlecut
	1/8	1	1/8	1/8	3	22000	22001
	3/16	2	3/16	3/16	3	22100	22101
	1/4	1-1/4	1/4	1/4	3	22200	22201
	3/8	2	3/8	3/8	4	22300	22301
	1/2	2	1/2	1/2	4	22400	22401

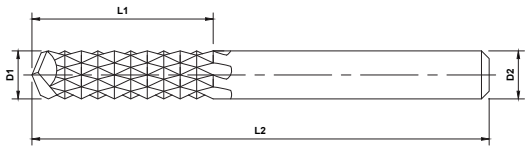FIBERGLASS ROUTERS



- High Performance A-Gr-SiV submicron grain carbide
- Diamond cut flute pattern
- Effective on laminate and fiberglass materials
- MAP certified quality



Standard, Plainend, Series FGR-A



Standard, Burend, Series FGR-B




Standard, Millend, Series FGR-C



Standard, Drillend, Series FGR-D


Length Key (K)

Standard Long * Solid Carbide




K	OD	LOC	SHK	OAL	End Cut Type			
	D1	L1	D2	L2	Plain (A)	Burend (B)	Millend (C)	Drillend (D)
*	1/16	3/16	1/8	1-1/2	FGR1A	FGR1B	FGR1C	FGR1D
*	3/32	3/8	1/8	1-1/2	FGR1-1A	FGR1-1B	FGR1-1C	FGR1-1D
*	1/8	1/2	1/8	1-1/2	FGR2A	FGR2B	FGR2C	FGR2D
*	3/16	5/8	3/16	2	FGR3A	FGR3B	FGR3C	FGR3D
*		5/8	1/4	2	FGR4A	FGR4B	FGR4C	FGR4D
*	1/4	3/4	1/4	2	FGR5A	FGR5B	FGR5C	FGR5D
*		3/4	1/4	2-1/2	FGR6A	FGR6B	FGR6C	FGR6D
*		1	1/4	2-1/2	FGR6-0A	FGR6-0B	FGR6-0C	FGR6-0D
*		3/4	1/4	3	FGR6-1A	FGR6-1B	FGR6-1C	FGR6-1D
*		1	1/4	3	FGR6-2A	FGR6-2B	FGR6-2C	FGR6-2D
*		5/16	1	5/16	2-1/2	FGR7A	FGR7B	FGR7C
*	3/8	1	3/8	2-1/2	FGR8A	FGR8B	FGR8C	FGR8D
*	1/2	1	1/2	3	FGR9A	FGR9B	FGR9C	FGR9D

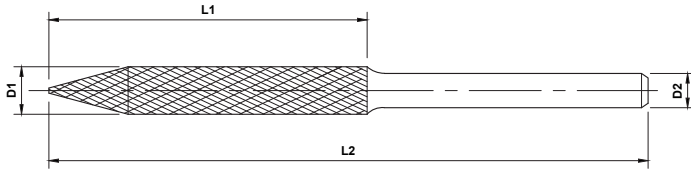
TIRE BURS



- High Performance A-Gr-SiV submicron grain carbide
- Solid carbide construction
- Superb for trimming and repairing steel belted tire
- MAP certified quality



Standard, Round-Shank, Series STB-



Standard, Tri-Shank, Series STB-T

Length Key (K)

 Standard
 Long
 * Solid Carbide

Steel
P

	OD	LOC	SHK	OAL	Shank Type	
K	D1	L1	D2	L2	Round Shank	Tri-Shank
*	3/16	1	3/16	2	STB-011	STB-011T
*		2	3/16	3	STB-012	STB-012T
*	7/32	2	1/4	3	STB-013	STB-013T
*	1/4	2	1/4	3	STB-014	STB-014T
*	5/16	1-1/2	5/16	3	STB-015	STB-015T
*		2	5/16	4	STB-016	STB-016T
*	3/8	3	3/8	4-1/2	STB-017	STB-017T
	1/2	3	3/8	5	STB-018	STB-018T

PLASTIC BUR BOX SETS



Non-Ferrous
N
Alumacut
recommended
for non-ferrous
materials

Empty Cases	Empty Case Part ID
12 Piece Bur Set, Plastic Case 1/8" Holes	PLASTIC-SET1
12 Piece Bur Set, Plastic Case 1/4" Holes	PLASTIC-SET2

Plastic Box Bur Set						
Pieces	Burs Included	Shank Diameter	Singlecut	Doublecut	Diamond Cut	Alumacut
12	SA-43, SA-42, SC-42, SC-41, SD-42, SE-41, SF-41, SG-41, SH-41, SJ-42, SL-42, SN-42	1/8"	SETM100PSC	SETM100PDC	SETM100PDM	—
12	SA-1, SA-14, SC-1, SC-14, SD-1, SE-1, SF-1, SG-1, SH-1, SJ-1, SM-1, SN-1	1/4"	SETM120PSC	SETM120PDC	SETM120PDM	—
9	SA-51, SB-51, SC-51, SD-51, SE-51, SF-51, SG-51, SM-51, SN-51	1/8"	SETM110PSC	SETM110PDC	SETM110PDM	SETM110PFM
8	SA-1, SA-3, SC-1, SC-3, SD-1, SD-3, SF-1, SF-3	1/4"	SETM130PSC	SETM130PDC	SETM130PDM	SETM130PFM
8	SB-1, SB-3, SC-1, SC-3, SD-1, SD-3, SF-1, SF-3	1/4"	SETM135PSC	SETM135PDC	SETM135PDM	SETM135PFM
8	SA-3, SA-5, SC-3, SC-5, SD-3, SD-5, SF-3, SF-5	1/4"	SETM140PSC	SETM140PDC	SETM140PDM	SETM140PFM
8	SB-3, SB5-, SC-3, SC-5, SD-3, SD-5, SF-3, SF-5	1/4"	SETM145PSC	SETM145PDC	SETM145PDM	SETM145PFM
8	SA-5, SC-3, SC-5, SD-5, SF-3, SF-5, SG-3, SL-4	1/4"	SETM150PSC	SETM150PDC	SETM150PDM	SETM150PFM
8	SB-5, SC-3, SC-5, SD-5, SF-3, SF-5, SG3-, SL-4	1/4"	SETM155PSC	SETM155PDC	SETM155PDM	SETM155PFM



POWER POUCH BUR SETS

Power Pouch Bur Sets		
Part ID	Shank Diameter	Description
POUCH-NL	1/4"	Blue Nylon Pouch with Snap for Bur Sets (up to 5 Burs) 4" x 6" No Logo
POUCH-WL	1/4"	Blue Nylon Pouch with Snap for Bur Sets (up to 5 Burs) 4" x 6" White Screen Printed Logo
POUCH-NL1DC	1/4"	SF-5, SF-3, SF-1 3pc. Doublecut Set in Blue Wallet Pouch Without Logo
POUCH-NL1FM	1/4"	SF-5, SF-3, SF-1 3pc. Alumacut Set in Blue Wallet Pouch Without Logo
POUCH-NL2DC	1/4"	SC-5, SC-3, SF-5, SF-3 4pc. Doublecut Set in Blue Wallet Pouch Without Logo
POUCH-NL2FM	1/4"	SC-5, SC-3, SF-5, SF-3 4pc. Alumacut Set in Blue Wallet Pouch Without Logo
POUCH-NL3DC	1/4"	SA-1, SC-3, SF-3, SC-5, SF-5 5pc. Doublecut Set in Blue Wallet Pouch Without Logo
POUCH-NL3FM	1/4"	SA-1, SC-3, SF-3, SC-5, SF-5 5pc. Alumacut Set in Blue Wallet Pouch Without Logo
POUCH-WL1DC	1/4"	SF-5, SF-3, SF-1 3pc. Doublecut Set in Blue Wallet Pouch With Mastercut Logo
POUCH-WL1FM	1/4"	SF-5, SF-3, SF-1 3pc. Alumacut Set in Blue Wallet Pouch With Mastercut Logo
POUCH-WL2DC	1/4"	SC-5, SC-3, SF-5, SF-3 4pc. Doublecut Set in Blue Wallet Pouch With Mastercut Logo
POUCH-WL2FM	1/4"	SC-5, SC-3, SF-5, SF-3 4pc. Alumacut Set in Blue Wallet Pouch With Mastercut Logo
POUCH-WL3DC	1/4"	SA-1, SC-3, SF-3, SC-5, SF-5 5pc. Doublecut Set in Blue Wallet Pouch With Mastercut Logo
POUCH-WL3FM	1/4"	SA-1, SC-3, SF-3, SC-5, SF-5 5pc. Alumacut Set in Blue Wallet Pouch With Mastercut Logo







24 PIECE COUNTERTOP DISPLAY



Description	Burs Included	Shank Diameter	Part Number
24 Piece Bur Display Doublecut	SA-1, SC-1, SD-1, SE-1, SF-1, SG-1, SL-1, SM-3, SA-3, SC-3, SD-3, SE-3, SF-3, SG-3, SL-3, SM-4, SA-5, SC-5, SD-5, SE-5, SF-5, SG-5, SL-4, SM-5 (ALL BURS DOUBLECUT)	1/4"	DISPLAY2
24 Piece Bur Set Without Plastic Display	Same as Above	1/4"	DIS24-ND

TECHNICAL INFORMATION

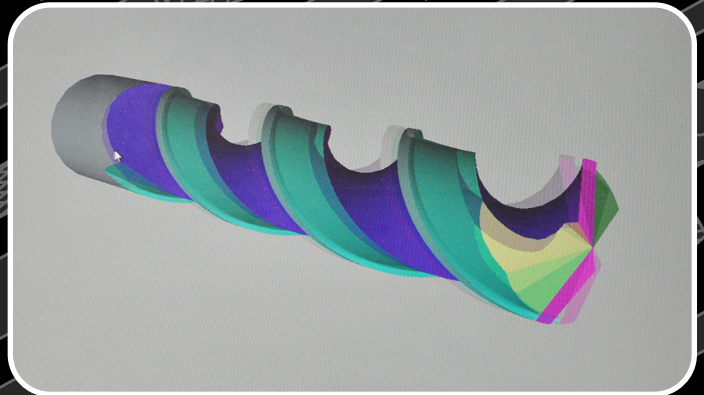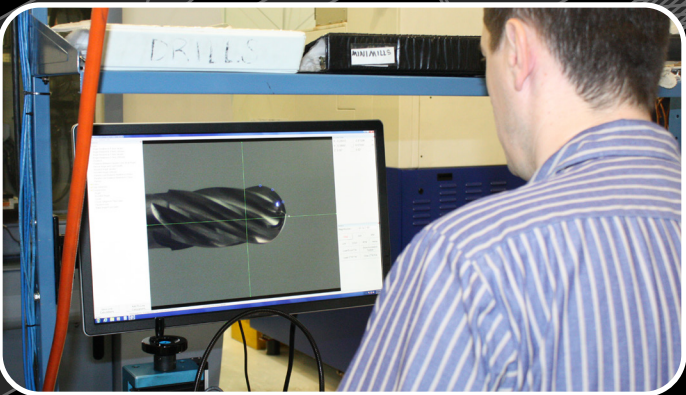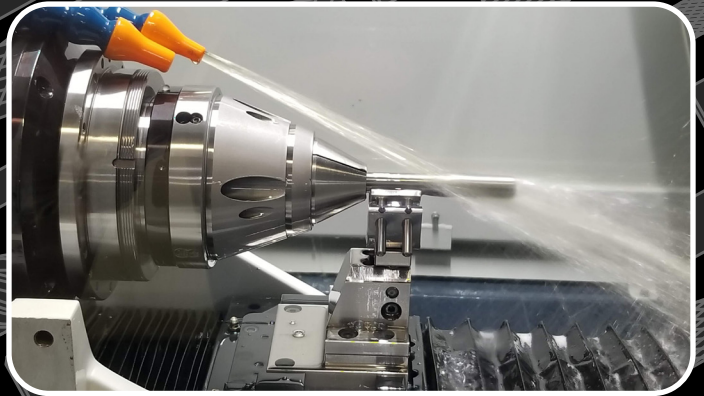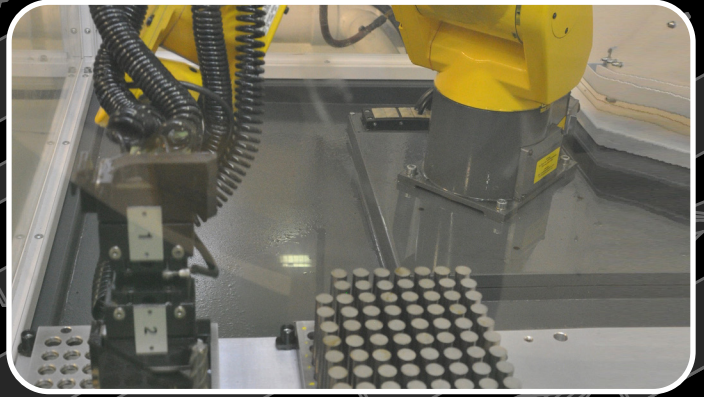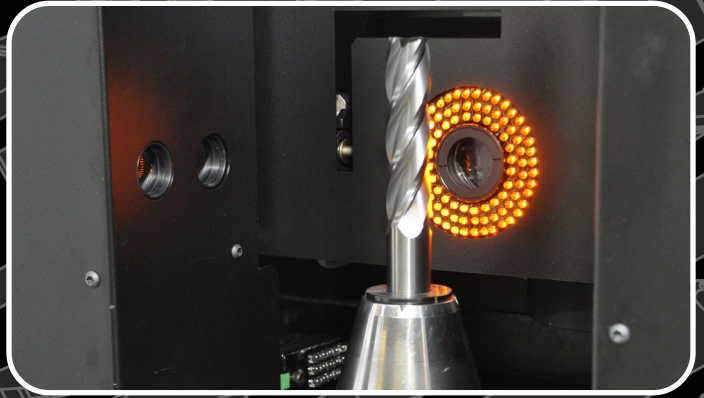- **MAP**
- **CNC 1st**
- **ISO**
- **Coatings**
- **Trouble Shooting Guide**
- **Speeds and Feeds**



QUALITY PROCESSES

YOUR PREMIER SOURCE FOR THE HIGHEST QUALITY CUTTING TOOLS FOR MORE THAN A QUARTER CENTURY!

From 1985 to the present, the values and ideals of Mastercut Tool Corp. remain steady. We will work relentlessly to continuously improve and provide you with excellence. We are known worldwide for many unique high performance tools engineered in our Florida facilities. Our AxMill, V4, V5, and F45 are just a few products that make Mastercut Tool Corp. your choice for increasing production and reducing costs.

The “MAP” to Your Success!

Our continuous improvement has led us to a process that gives you unmatched, consistent quality. That process is our unique MAP Technology! Mastercut Automated Production is our exclusive method of standardization and quality repeatability. The MAP combines technology, skill, and rigid processes to provide you with the most precise products that money can buy, batch to batch and year to year.



Our MAP...your map to success!

CNC 1st Team



Customers' Needs Come First! This is what truly matters to us. To ensure you the fastest possible service, we have assembled simulation, engineering, production scheduling, and inventory personnel into one unit, wherein they can collaborate on any and all special requests from you, the moment your request is received. They are dedicated and qualified to assist you with solutions, fast!

Mastercut's Superior Carbide Blend – A-Gr-SiV (Active Grain Sized-Volume)

Our superior tungsten carbide gives you the ability to be aggressive when you need to be. Growth inhibitors in our submicron carbide blanks maintain the most consistent grain size available, giving you superior hardness AND toughness.

ISO 9001:2015

In 2003, Mastercut Tool Corp. successfully achieved registration under ISO 9001:2000 and has maintained our quality system to our current ISO 9001:2015 certification and Lean Six Sigma practices. We maintain these strict standards to further guarantee that every tool you buy from Mastercut Tool Corp. is of the highest quality.



SUCCESS

At Mastercut Tool, we take great pride in our high quality control standards and in the accomplishments of your customers using our superior quality tools. Therefore, our bottom line is:

Your customers' success with our products is the measure of our success!

MASTERCUT TOOL COATING OPTIONS

Mastercut Premier Coatings

- Speed and Feed increases from 30 to 200 percent
- Tool life is increased up to 10 times
- Reduces friction, spindle torque and vibration, providing a better finish
- Isolates the tool from the part, avoids edge buildup and tool cratering
- Reduces or eliminates coolant
- Repeatable, stable performance between batches

Preferred Coating Use

Materials	PowerT	PowerC	PowerA	PowerZ	PowerN	PowerNR	PowerDLC	PowerRD
Aluminum, Low Silicon < 10%				✓			✓	✓
Aluminum, High Silicon > 10%		✓		✓			✓	✓
Copper, Copper Alloys	✓		✓	✓			✓	
Ductile, Malleable Cast Iron	✓	✓	✓		✓	✓		
Carbon Steel, 1000 Series	✓	✓	✓		✓	✓		
Alloy Steel, 4 to 9000 Series	✓	✓	✓		✓	✓		
Tool Steel	✓	✓	✓		✓	✓		
SS Steel, 300 Series	✓	✓	✓	✓	✓	✓		
SS Steel, 400 Series	✓	✓	✓	✓	✓	✓		
SS PH Series	✓	✓	✓	✓	✓	✓		
Titanium, Titanium Alloys	✓	✓	✓	✓	✓	✓		
Nickel, Nickel Alloys, Cobalt	✓		✓		✓	✓		
Wood, Paper			✓	✓			✓	
Composites, Plastics	✓		✓	✓	✓		✓	✓
Graphite							✓	✓
Fiberglass		✓	✓	✓			✓	✓



MASTERCUT TOOL COATING OPTIONS



PowerT (Titanium Nitride, TiN) (append -2)*

Color: Gold
Vickers Hardness: approximately 2,300 Vickers
General purpose, entry level over uncoated carbide



PowerC (Titanium Carbon Nitride, TiCN) (append -3)*

Color: ranges from slight violet to brown-gray
Vickers Hardness: approximately 3,000 Vickers
Used on ferrous, non-ferrous and non-magnetic stainless steel
Good abrasion resistance, low heat resistance, for applications requiring low RPMs and high thrust




PowerA (Aluminum Titanium Nitride, AlTiN) (append -1)*

Color: Dark Gray
Vickers Hardness: approximately 3,600 Vickers
Nickel Alloys, Stainless Steel, Hardened Steels, Tool Steels, Cast Iron
An excellent broad spectrum grade. May be run in dry or minimum quantity lubrication applications, where heat can be a problem. Also handles light chip loads very well



PowerZ (Zirconium Nitride, ZrN) (append -4)*

Color: dull Gold
Vickers Hardness: approximately 2,800 Vickers
Outstanding on aluminum, including high silica aluminum. Can also be used on cast iron, stainless steels, titanium



PowerN (nACo) nano-composite (nc-AlTiN)/(a-Si³N⁴) (append -5)*

Color: varying shades of blue-gray; blue-based color dissipates immediately upon use.
Vickers Hardness: approximately 4,500 Vickers
Outstanding performance in superalloys, hard material machining, high heat applications and best when used with very rigid setup.



PowerNR (nACRo) nano-composite (nc-AlCrN/a-Si³N⁴)(append -8)*

Color: gray
Vickers Hardness: approximately 4,000 Vickers
Outstanding in high heat applications, better resistance to shock and chipping than nACo, for tough, aggressive cutting applications.



PowerDLC (Diamond Like Carbon)(append -6)*

Color: variable gray to black
Vickers Hardness: approximately 4,000 Vickers
Non-ferrous metals, high silicone aluminum, copper, plastic, graphite, fiberglass or reinforced plastics
Can be applied to any carbide substrate



PowerRD (Real Diamond)(append -7)*

Color: variable gray to black
Vickers Hardness: approximately 8,000 Vickers
Non-ferrous, metals, aluminum, graphite, green ceramics, and composites
Requires 6% cobalt carbide for application

* *append -#* indicates that this coating is applied to uncoated tool part number

MASTERCUT TROUBLESHOOTING GUIDES

Solid Carbide Endmills		
Challenge	Cause	Corrective Action
Chattering	Incorrect Feed Rate	Reduce feed rate 10%
	Incorrect Speed	Check recommendations, adjust accordingly
	Low Tool Holder Rigidity	Replace tool holder with more rigid tool holder
	Low Machine Tool Spindle Rigidity	Utilize machine with larger spindle
	Relief Angle Too Steep	Switch to tool with less relief or regrind tool to reduce angle
	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Depth of Cut	Reduce depth of cut
	Incorrect Tool Cut Length	Use shorter flute length and/or place tool shank deeper in tool holder
	Bad Collet	Replace collet
Tool Too Sharp	Reduce feed rate 10% for initial cut to break in tool	
Breakage	Incorrect Feed Rate	Reduce feed rate
	Incorrect Depth of Cut	Reduce depth of cut
	Incorrect Tool Cut Length	Use shorter flute length - Place tool shank deeper in tool holder
	Incorrect Tool Overall Length	Use shorter tool or place tool shank deeper in tool holder
	Tool Wear	Replace tool or sharpen tool at earlier stage
	Chip Impaction	Increase coolant flow
Chipping	Incorrect Feed Rate	Reduce feed rate
	Improper Tool Break In	Reduce feed rate 10% for initial cut to break in tool
	Incorrect Feed Direction	Change cut path to climb milling
	Chatter	See recommendations for correcting chatter
	Low Tool Holder Rigidity	Replace tool holder with higher rigidity tool holder
	Low Machine Tool Spindle Rigidity	Utilize machine with larger spindle
	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Tool Too Sharp	Reduce feed rate 10% for initial cut to break in tool
	Loose Tool Holder	Clean and tighten tool holder
	Loose End Mill	Tighten tool holder
	Incorrect Speed	Check recommendations and adjust accordingly
	Lack of Hone	Hone Cutting edge

MASTERCUT TROUBLESHOOTING GUIDES

Solid Carbide Endmills		
Challenge	Cause	Corrective Action
Wear	Incorrect Speed	Check recommendations and adjust accordingly
	Incorrect Feed Rate	Reduce or increase feed rate
	Incorrect Feed Direction	Change cut path to climb milling
	Hard Material	Use tool designed for hard material - Use coated tools
	Chip Impaction	Increase coolant volume - Increase coolant pressure
	Poor Coolant Condition	Replace coolant or correct mix ratio
	Short Tool Life	Use tool designed for work piece material - Use coated tools
	Incorrect Tool Geometry	Utilize tool recommended for work piece material
Chip Impaction	Incorrect Feed Rate	Reduce feed rate
	Incorrect Speed	Check recommendations and adjust accordingly
	Incorrect Tool Geometry	Utilize tool recommended for work piece material
	Insufficient Coolant	Increase coolant volume - Increase coolant pressure
Poor Surface Finish	Incorrect Feed Rate	Reduce feed rate
	Incorrect Speed	Check recommendations and adjust accordingly
	Tool Wear	Replace tool or sharpen tool at earlier stage
	Incorrect Depth of Cut	Reduce depth of cut
	Chip Impaction	Increase coolant volume - Increase coolant pressure
	End Cut Smearing	Grind tool with wiper flat
	Incorrect Tool Geometry	Utilize tool recommended for work piece material
Burring	Tool Wear	Replace tool or sharpen tool at earlier stage
	Incorrect Feed Direction	Change cut path to climb milling
	Incorrect Speed	Check recommendations and adjust accordingly
	Incorrect Feed Rate	Reduce feed rate
	Incorrect Depth of Cut	Reduce depth of cut
	Incorrect Tool Geometry	Utilize tool recommended for work piece material
Dimensional Inaccuracy	Tool Deflection	Reduce tool length of cut - Place tool deeper in tool holder
	Incorrect Tool Geometry	Utilize tool recommended for work piece material
	Low Tool Holder Rigidity	Replace tool holder with more rigid tool holder
	Low Machine Tool Spindle Rigidity	Utilize machine with larger spindle - Tighten tool holder
	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Bad Collet	Replace collet
	Machine Tool/Work Piece Set Up	Check for proper angular set up

MASTERCUT TROUBLESHOOTING GUIDES

Solid Carbide Drills		
Challenge	Cause	Corrective Action
Drill Point Chipping	Incorrect Feed Rate	Lower feed rate
	Incorrect Speed Rate	Check speed recommendations, adjust accordingly
	Incorrect Tool Cut Length	Use shorter tool - place tool shank deeper in tool holder
	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Loose Tool	Tighten or replace tool holding method
	Poor Coolant Conditions	Replace coolant or correct mix ratio
Chisel/Point Center Breakage	Incorrect Initial Feed Rate	Lower initial feed rate 30%
	Poor Work Piece Surface Condition	Grind or clean work piece surface
	Drill Point Off Center	Re-point drill, check set up in tool holder
	Insufficient Drill (web) Thinning	Re-point and thin drill point
Breakage/Chipping at Outer Cutting Edge	Incorrect Feed Rate	Lower feed rate
	Incorrect Speed Rate	Check speed recommendations, adjust accordingly
	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Low Tool Holding Strength	Tighten tool holder or use end mill holder
	Poor Tool Set Up - Concentricity	Minimize runout to less than .001"
	Poor Coolant Conditions	Replace coolant or correct mix ratio
	Incorrect Tool Cut Length	Use shorter tool - place tool shank deeper in tool holder
Tool Wear Life	Incorrect Speed Rate	Check speed recommendations, adjust accordingly
	Poor Coolant Conditions	Replace coolant or correct mix ratio
	Improper Drill Point	Re-point drill or use recommended drill point for material
	Abrasive/Tough Work Piece Material	Use coated tool (Check recommendations for coating)
Tool Breakage	Inconsistent Feed Rate	Maintain constant feed rate
	Incorrect Feed Rate	Lower feed rate
	Poor Tool Set Up - Concentricity	Minimize runout to less than .001"
	Low Tool Holding Strength	Tighten tool holder or use end mill holder
	Incorrect Tool	Check recommendations for proper drill and drill point
	Poor Coolant Conditions	Replace coolant or correct mix ratio
	Low Work Piece Rigidity	Tighten or improve work piece holding method
Outside Margin Damage / Wear	Poor Tool Set Up - Concentricity	Minimize runout to less than .001"
	Incorrect Tool Selection	Use recommended drill/drill point for work piece material
	Poor Coolant Conditions	Replace coolant or correct mix ratio
	Insufficient Coolant	Increase coolant volume - Increase coolant pressure
	Chip Packing	Increase coolant volume - Increase coolant pressure

MASTERCUT TROUBLESHOOTING GUIDES

Solid Carbide Drills		
Challenge	Cause	Corrective Action
Outside Margin Damage / Wear (cont.)	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Loose Tool	Tighten or replace tool holding method
	Incorrect Feed Rate	Lower feed rate
	Incorrect Speed Rate	Check speed recommendations adjust accordingly
Chip Impaction	Incorrect Speed Rate	Typically increase speed, check speed recommendations
	Incorrect Feed Rate	Typically increase feed recommendations
	Poor Coolant Conditions	Replace coolant or correct mix ratio
	Insufficient Coolant	Increase coolant volume - Increase coolant pressure
	Incorrect Tool	Check recommendations for proper drill and drill point
Long/Stringy Chips	Incorrect Feed Rate	Typically increase feed, check feed recommendations
	Incorrect Point Angle	Regrind Point to recommended angle, Replace drill
	Edge Sharpness	Hone cutting edge, use pre-honed drill
	Inconsistent Feed Rate	Maintain constant feed rate - Peck Drill to change feed rate
Poor Surface Finish	Incorrect Speed Rate	Typically increase speed, check speed recommendations
	Incorrect Feed Rate	Lower feed rate
	Poor Coolant Conditions	Replace coolant or correct mix ratio
	Tool Wear	Regrind or Replace drill
Hole Accuracy	Edge Sharpness	Hone cutting edge, use pre-honed drill
	Incorrect Tool	Check recommendations for proper drill and drill point
	Edge Sharpness	Hone cutting edge, use pre-honed drill
	Incorrect Tool Cut Length	Use shorter tool - place tool shank deeper in tool holder
	Tool Size Accuracy	Replace tool
Tool Deflection	Poor Work Piece Surface Condition	Grind or clean work piece surface
	Incorrect Tool Cut Length	Use shorter tool - place tool shank deeper in tool holder
	Uneven Drill Point	Regrind drill point
	Incorrect Point Angle	Regrind Point to recommended angle, Replace drill
	Uneven Work Surface	Use self centering drill point or spot drill
Vibration/Noise	Edge Sharpness	Hone cutting edge, use pre-honed drill
	Incorrect Tool Cut Length	Use shorter tool - place tool shank deeper in tool holder
	Incorrect Point Angle	Regrind Point to recommended angle, Replace drill
	Inconsistent Feed Rate	Maintain constant feed rate - Peck Drill to change feed rate
	Incorrect Speed Rate	Check speed recommendations adjust accordingly
	Low Tool Holding Strength	Tighten tool holder or use end mill holder

MASTERCUT TROUBLESHOOTING GUIDES

Solid Carbide Reamers		
Challenge	Cause	Corrective Action
Hole Accuracy	Misaligned Starter Hole	Inspect fixturing/work piece set up - Use floating tool holder or bushing
	Incorrect Speed Rate	Typically increase speed, check speed recommendations
	Incorrect Feed Rate	Typically decrease feed, check feed recommendations
	Incorrect Tool Diameter	Inspect tool diameter. Replace or reduce diameter
	Tool Wear	Sharpen or replace tool - Use coated tool
Poor Finish	Unequal Cutting Edges	Regrind tool with equal chamfer height or radius size
	Incorrect Feed Rate	Check feed recommendations, adjust accordingly
	Incorrect Speed Rate	Check speed recommendations, adjust accordingly
	Chatter	Increase speed rate or decrease feed rate
	Insufficient Material Removal	Reduce initial drill size - Leave 2-3% of finished size for reaming
	Spindle/Tool Holder Runout	Use bushing. Replace tool holder (Bushing to be .0003" larger than reamer)
	Damaged Tool	Regrind or replace tool
	Insufficient Cutting Clearance	Reduce clearance behind chamfer or radius
Angled Holes	Inconsistent Feed Rate	Maintain constant feed. Use power feed on manual machines
	Drill Deflection/Walk	Correct drilling operation (Check drill trouble shooting for corrective actions)
	Insufficient Material Removal	Reduce initial drill size. Leave 2-3% of finished size for reaming
	Misaligned Set Up	Inspect fixturing/work piece set up - Use floating tool holder or bushing
Premature Tool Wear	Insufficient Chamfer Angle	Regrind reamer with higher included angle (100° - 180°)
	Incorrect Material Removal	Drill initial hole size to leave 2-3% of finished size for reaming
	Incorrect Feed Rate	Typically decrease feed, check feed recommendations
	Misaligned Starter Hole	Inspect fixturing/work piece set up. Use floating tool holder or bushing
	Hard or Abrasive Material	Use coated tool
	Poor Coolant Condition	Replace coolant or correct mix ratio
Chatter	Chip evacuation	Increase coolant flow
	Incorrect Speed Rate	Typically increase speed, check speed recommendations
	Incorrect Feed Rate	Typically decrease feed, check feed recommendations
	Loose Tool	Tighten or replace tool holding method
	Low Work Piece Rigidity	Tighten or improve work piece holding method
	Low Tool Holding Strength	Tighten tool holder. Minimize float
	Poor Tool Set Up - Concentricity	Minimize runout to less than .0002"
Low Tool Rigidity	Use shorter reamer - Place tool shank deeper in tool holder	
Tool Breakage	Misaligned Set Up	Inspect fixturing/work piece set up. Use floating tool holder or bushing
	Drill Deflection/Walk	Correct drilling operation (Check drill trouble shooting for corrective actions)
	Tool Wear	Sharpen or replace tool - Use coated tool
	Damaged Tool	Regrind or replace tool
	Incorrect Material Removal	Check initial drill size - Leave 2-3% of finished size for reaming
	Incorrect Speed Rate	Typically decrease speed, check speed recommendations
	Incorrect Feed Rate	Typically increase feed, check feed recommendations
	Tool Bottoming in Hole	Reduce depth of cut - adjust stop depth

MASTERCUT TROUBLESHOOTING GUIDES

Carbide Burs - Possible Causes and Solutions

Challenge	Excessive Force	Heat From Rubbing Shank	Dull Flutes	Seized In/Against Workpiece	Tool Dropped	Poor Location in Collet	Worn Handpiece Bearings	Bent Shank	Poor Working Stability	Use Coarser Geometry	Use Finer Geometry	Use Double Cut or Chip Breaker Geometry	Soft Material - Lighten Feed	Increase RPMs	Decrease RPMs	Avoid Diamond Cut	Use Anti-stick compound	Faster Feed Rate	Slower Feed	Abrasive Material	Poor Set-Up	Failure To Support / Engage Prior to RPM	
Braze Failure	X	X	X	X	X																		
Poor Hand Control						X	X	X	X		X	X										X	
Chipping				X	X				X					X									
Carbide Fracture				X	X				X														
Plugging										X			X				X						
Handpiece Vibration														X	X			X	X			X	
Poor Workpiece Finish						X	X	X	X		X			X	X			X				X	
Poor Tool Life		X	X			X	X	X	X					X	X	X		X	X	X	X		
Lack of Available Handpiece RPMs												X	X										
Work Hardening of Workpiece	X		X							X		X			X				X				
Severely Bent Shanks of Long Series Burs																					X	X	

TECHNICAL INFORMATION MATERIAL GROUPINGS











Material Group	Material Type	Hardness	USA Standards, SAE/AISI/UNS
Steel			
1.1	Magnetic soft steel	< 120 B	12L14, 12L15
1.2	Structural, case carburising	< 200 B	1005-1025, 1214, 1215, A36
1.3	Plain carbon steel	< 250 B	1030-1060, 1144-1146
1.4	Alloy Steel	< 250 B	4140, 4340, 52100,8620, H11-H41, A2, D2, O1, P20, 420
1.5	Alloy steel, hardened/tempered steel	350	4140, 4340, 52100,8620, H11-H41, A2, D2, O1, P20, 420
1.6	Alloy steel, hardened/tempered steel	> 350 B	4140, 4340, 52100,8620, H11-H41, A2, D2, O1, P20, 420
1.7	Alloy steel, hardened	49-55 C	A2, H10-H41, L1-L6, M1-M42, T1
1.8	Alloy steel, hardened	55-60 C	A2, H10-H41, L1-L6, M1-M42, T1
1.9	Alloy steel, hardened	>60C	A2, H10-H41, L1-L6, M1-M42, T1
Stainless Steel			
2.1	Free Machining Stainless	< 250 B	200, 303, 416, 420F, 430F,440
2.2	Austenetic	< 250 B	301,302,304,316,321,330,AM-350, Custom 455
2.3	Ferritic + Austenetic, Martensitic	< 300 B	318-329, 400-446, 15-4PH,17-4PH,Duplex
2.4	Precipitation Hardened	< 300 B	15-5PH, 17-4PH, Custom 450
Cast Iron			
3.1	Lamellar graphite	< 150	Grey, G10, Gg40, J431C, A48 Class 20
3.2	Lamellar graphite	>150<300	Grey, GG25-Gg40, J158, A48 Class 40-60
3.3	Nodular graphite, malleable cast iron	< 200	A220, A436, A439, A602, Black, GGG40-GGG70
3.4	Nodular graphite, malleable cast iron	>200<300	Black Gts/Gtw, J434C
Titanium			
4.1	Unalloyed	< 200	Commercially Pure
4.2	Alloyed	< 270	6A14V,6A14V-2Sn, Monel, Monel K
4.3	Alloyed	>270<350	6A14V-4Mo,7A14-V-4Mo, 4911-4967
Nickel			
5.1	Unalloyed	< 150	Commercially Pure
5.2	Alloyed	< 270	Monel 400, Hastelloy C, Inconel 625, Waspaloy
5.3	Alloyed	>270<350	Inconel 718, Nimonic 75-95, Rene 41,Inconel 825, A286
Copper			
6.1	Copper	< 100	Commercially Pure
6.2	β Brass, Bronze	< 200	314-340, 350-370
6.3	γ-Brass	< 200	Alloyed Cu + Al + Fe, Long Chipping
6.4	High Strength Bronze	< 470	Ampco 18-25
Aluminum, Magnesium			
7.1	Al,Mg, unalloyed	< 100	Commercially Pure
7.2	Al alloyed, Si<0.5%	< 150	6061 T6, 7075, 314-340
7.3	Al alloyed, Si>0.5%<10%	< 120	6061 T6, 380-390
7.4	Al alloyed, Si>10%	< 120	Magnesium Whisker Reinforced
Synthetic Materials			
8.1	Thermoplastics	n/a	Ultramid, Polystrol
8.2	Thermosetting plastics	n/a	Bakelite, Pertinax
8.3	Reinforced plastic materials	n/a	CFK, GFKAFK
Hard Materials			
9.1	Cermets (Metal-ceramics)	< 550	

TECHNICAL INFORMATION











Suggested Endmill Starting Feed Per Tooth

Cutting Diameter	1/32"	1/16"	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"
Material Group												
1.1	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
1.2	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
1.3	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
1.4	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
1.5	0.0001	0.0002	0.0005	0.0006	0.0007	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
1.6	0.0001	0.0002	0.0005	0.0006	0.0007	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
1.7	0.0001	0.0002	0.0005	0.0006	0.0007	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
1.8	0.0001	0.0002	0.0005	0.0006	0.0007	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
1.9	0.0001	0.0002	0.0005	0.0006	0.0007	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
2.1	0.0002	0.0005	0.0007	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
2.2	0.0001	0.0002	0.0004	0.0005	0.0006	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
2.3	0.0001	0.0002	0.0004	0.0005	0.0006	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
2.4	0.0001	0.0001	0.0003	0.0004	0.0005	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004
3.1	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
3.2	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
3.3	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
3.4	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
4.1	0.0002	0.0003	0.0005	0.0006	0.00075	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
4.2	0.0002	0.0001	0.0002	0.0003	0.0005	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
4.3	0.0002	0.0003	0.0004	0.0005	0.0006	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
5.1	0.0002	0.0003	0.0004	0.0005	0.0006	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
5.2	0.0002	0.0003	0.0004	0.0005	0.0006	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
5.3	0.0002	0.0003	0.0004	0.0005	0.0006	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
6.1	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
6.2	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
6.3	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045
6.4	0.0002	0.0003	0.0005	0.0006	0.00075	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035
7.1	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
7.2	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
7.3	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
7.4	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
8.1	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
8.02	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
8.3	0.0005	0.0007	0.001	0.0012	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.007	0.01
9.1	0.0002	0.0004	0.0006	0.0008	0.001	0.0015	0.002	0.0025	0.003	0.0035	0.004	0.0045

TECHNICAL INFORMATION FOR ENDMILLS













Endmills	2 FL SQ Standard Endmill	3 FL SQ Standard Endmill	4 FL SQ Standard Endmill	2 FL SQ Standard Endmill	3 FL SQ Standard Endmill	4 FL SQ Standard Endmill	2 FL SQ Long Endmill	3 FL SQ Long Endmill	4 FL SQ Long Endmill	2 FL SQ Long Endmill
										
Series	Uncoated 201, 202, 209, 213	Uncoated 210, 213, 201, 202, 540	Uncoated 211, 213, 201, 202	PowerA 209, 241, 254, 253, 204, 213, 243	PowerA 245, 244, 257, 256, 211, 217	PowerA 248, 247, 260, 259, 209, 215, 249	Uncoated 204, 206	Uncoated 204, 206	Uncoated 206	PowerA 255, 224, 226
Material Group	Surface Feet Per Minute									
1.1	260-400	260-400	260-400	525-800	525-800	525-790	160-230	160-230	160-230	330-450
1.2	260-400	260-400	260-400	525-800	525-800	525-790	160-230	160-230	160-230	330-450
1.3	200-260	200-260	200-260	400-525	395-525	395-525	115-165	115-165	115-165	230-330
1.4	200-260	200-260	200-260	395-525	395-525	395-525	115-165	115-165	115-165	230-330
1.5	130-200	130-200	130-200	395-525	395-525	260-525	80-115	80-115	80-115	165-230
1.6	65-130	65-130	65-130	135-270	135-270	130-260	50-65	50-65	50-65	100-150
1.7				135-270	135-270	130-260				100-150
1.8				135-270	135-270	130-260				100-150
1.9										
2.1	130-260	130-260	130-260	260-525	260-525	260-525	80-160	80-160	80-160	160-320
2.2	100-160	100-160	100-160	200-330	200-330	200-330	65-100	65-100	65-100	130-200
2.3	80-130	80-130	80-130	160-260	160-260	160-260	50-80	50-80	50-80	100-160
2.4	70-120	70-120	70-120	150-220	150-220	150-220				80-140
3.1	160-260	160-260	160-260	330-500	330-500	330-500	115-200	115-200	115-200	230-400
3.2	130-230	130-230	130-230	260-460	260-460	260-460	100-160	100-160	100-160	200-330
3.3	115-160	115-160	115-160	230-330	230-330	230-330	80-115	80-115	80-115	160-230
3.4	80-130	80-130	80-130	160-260	160-260	160-260	65-100	65-100	65-100	130-200
4.1	200-330	200-330	200-330	400-650	400-650	400-650	115-200	115-200	115-200	230-395
4.2	130-200	130-200	130-200	260-400	260-400	260-400	80-115	80-115	80-115	160-230
4.3	65-100	65-100	65-100	130-200	130-200	130-200	50-70	50-70	50-70	100-130
5.1	200-330	200-330	200-330	400-650	400-650	400-650	115-200	115-200	115-200	230-395
5.2	100-200	100-200	100-200	200-400	200-400	200-400	65-115	65-115	65-115	130-230
5.3	65-160	65-160	65-160	130-330	130-330	130-330	50-100	50-100	50-100	100-200
6.1	330-660	330-660	330-660	650-1,350	650-1,350	650-1,350	200-400	200-400	200-400	400-800
6.2	425-560	425-560	425-560	850-1,150	850-1,150	850-1,150	330-400	330-400	330-400	660-800
6.3	425-560	425-560	425-560	850-1,150	850-1,150	850-1,150	330-400	330-400	330-400	660-800
6.4	70-160	70-160	70-160	165-330	165-330	165-330	65-115	65-115	65-115	130-230
7.1	500-1,500	500-1,500					330-1,000	330-1,000		
7.2	500-1,500	500-1,500					330-1,000	330-1,000		
7.3	130-260	130-260					100-200	100-200		
7.4	115-160	115-160								
8.1	260-520	260-520					200-400	200-400		
8.2	230-425	230-425					165-330	165-330		
8.3	230-425	230-425					165-330	165-330		
9.1	13-26	13-26	13-26	25-50	25-50	25-50				

SPEEDS AND FEEDS FOR MATERIAL APPLICATIONS














3FL SQ Long Endmill	4 FL SQ Long Endmill	2 FL Square End, Minimill	2 FL Ball End, Minimill	4 FL Square End, Minimill	4 FL Ball End, Minimill	2 FL Square End, Minimill	2 FL Ball End, Minimill	4 FL Square End, Minimill	4 FL Ball End, Minimill
									
PowerA 228, 227, 229	PowerA 231, 230, 232	Uncoated 207	Uncoated 207	Uncoated 207	Uncoated 207	PowerA 207	PowerA 207	PowerA 207	PowerA 207
330-460	330-460	260-400	260-400	260-400	260-400	525-800	525-800	525-800	525-800
330-460	330-460	260-400	260-400	260-400	260-400	525-800	525-800	525-800	525-800
230-330	230-330	200-260	200-260	200-260	200-260	400-525	400-525	400-525	400-525
230-330	230-330	200-260	200-260	200-260	200-260	395-525	395-525	395-525	395-525
165-230	165-230	130-200	130-200	130-200	130-200	395-525	395-525	395-525	395-525
100-150	100-150	65-130	65-130	65-130	65-130	135-270	135-270	135-270	135-270
100-150	100-150					135-270	135-270	135-270	135-270
100-150	100-150					135-270	135-270	135-270	135-270
160-320	160-320	130-260	130-260	130-260	130-260	260-525	260-525	260-525	260-525
130-200	130-200	100-160	100-160	100-160	100-160	200-330	200-330	200-330	200-330
100-160	100-160	80-130	80-130	80-130	80-130	160-260	160-260	160-260	160-260
80-140	80-140	70-120	70-120	70-120	70-120	150-220	150-220	150-220	150-220
230-400	230-400	160-260	160-260	160-260	160-260	330-500	330-500	330-500	330-500
200-330	200-330	130-230	130-230	130-230	130-230	260-460	260-460	260-460	260-460
160-230	160-230	115-160	115-160	115-160	115-160	230-330	230-330	230-330	230-330
135-200	135-200	80-130	80-130	80-130	80-130	160-260	160-260	160-260	160-260
230-400	230-400	200-330	200-330	200-330	200-330	400-650	400-650	400-650	400-650
165-230	165-230	130-200	130-200	130-200	130-200	260-400	260-400	260-400	260-400
100-130	100-130	65-100	65-100	65-100	65-100	130-200	130-200	130-200	130-200
230-400	230-400	200-330	200-330	200-330	200-330	400-650	400-650	400-650	400-650
130-230	130-230	100-200	100-200	100-200	100-200	200-400	200-400	200-400	200-400
100-200	100-200	65-160	65-160	65-160	65-160	130-330	130-330	130-330	130-330
650-800	650-800	330-660	330-660	330-660	330-660	650-1,350	650-1,350	650-1,350	650-1,350
650-800	650-800	425-560	425-560	425-560	425-560	850-1,150	850-1,150	850-1,150	850-1,150
650-800	650-800	425-560	425-560	425-560	425-560	850-1,150	850-1,150	850-1,150	850-1,150
135-230	135-230	70-160	70-160	70-160	70-160	165-330	165-330	165-330	165-330
		500-1,500	500-1,500	500-1,500	500-1,500				
		500-1,500	500-1,500	500-1,500	500-1,500				
		130-260	130-260	130-260	130-260				
		115-160	115-160	115-160	115-160				
		260-520	260-520	260-520	260-520				
		230-425	230-425	230-425	230-425				
		230-425	230-425	230-425	230-425				
		12-25	12-25	12-25	12-25	25-50	25-50	25-50	25-50

Technical Information

TECHNICAL INFORMATION FOR ENDMILLS









Endmills	V4 Stub and Standard	V4 Long	V5 Stub and Standard	V5 Long	Medium Pitch Roughers	Medium Pitch Roughers	HY5 Stub and Standard	HY5 Long	F45 Standard	F45 Standard	AlumaZip	TwisterMill
												
Series	PowerA 400, 402	PowerA 401	PowerA 408, 410	PowerA 409	Uncoated 433	PowerA 433	PowerA 456, 458	PowerA 457	Uncoated 459	PowerA 411	Uncoated 432	Uncoated 452
Material Group	Surface Feet Per Minute											
1.1	500-800	330-450	500-800	330-450	260-395	500-700	500-1,400	325-900				
1.2	500-800	330-450	500-800	330-450	260-395	500-700	500-1,400	325-900				
1.3	400-525	225-330	400-525	225-330	200-260	400-550	330-1,000	220-650				
1.4	400-525	225-330	400-525	225-330	200-260	400-550	330-1,000	220-650	220-650	330-1,000		
1.5	250-400	165-225	330-700	165-225	130-200	250-400	330-650	220-425	220-425	330-650		
1.6	130-250	100-165	330-700	100-165	65-130	125-260	330-650	220-425	220-425	330-650		
1.7	130-250	100-165	330-700	100-165			330-650	220-425	220-425	330-650		
1.8	130-250	100-165	330-700	100-165			330-650	220-425	220-425	330-650		
1.9												
2.1	250-800	165-330	250-800	165-330	130-260	250-550	250-800	160-520	160-520	250-800		165-330
2.2	200-600	125-200	200-600	125-200	100-160	200-325	200-600	130-400	130-400	200-600		135-200
2.3	165-300	100-165	165-300	100-165	80-130	160-260	100-300	65-200	65-200	100-300		80-180
2.4	145-200	110-160	145-200	110-160								
3.1	210-700	225-400	210-700	225-400	160-260	320-550	200-650	130-425				
3.2	180-550	200-330	180-550	200-330	130-230	260-450	165-575	100-380				
3.3	150-450	165-225	150-450	165-225	115-160	230-325	135-460	90-300				
3.4	110-330	125-200	110-330	125-200	80-130	160-260	100-300	65-200				
4.1	200-400	200-330	330-1,000	200-330	200-330	400-650	330-1,000	220-650	220-650	330-1,000		260-425
4.2	125-330	165-225	250-800	165-225	130-200	260-400	260-800	130-520	130-520	260-800		165-260
4.3	130-200	100-125	130-400	100-125	65-100	130-200	130-400	85-260	85-260	130-400		80-135
5.1	330-700	225-400	330-1,000	225-400	200-330	400-650	330-1,000	220-650	220-650	330-1,000		260-425
5.2	250-800	125-225	250-800	125-225	100-200	300-400	260-800	170-520	170-520	260-800		130-260
5.3	130-400	100-200	130-400	100-200	65-160	130-325	130-400	85-260	85-260	130-400		80-230
6.1					330-660							
6.2					425-560							650-850
6.3					425-560							650-850
6.4					65-160							135-260
7.1					160-1,500						1,200-3,000	
7.2					200-1,500						1,200-3,000	
7.3					130-260						1,000-2,500	
7.4					115-160						330-1,500	
8.1					260-520						650-2,000	
8.2					230-425						300-900	
8.3					230-425							
9.1												

SPEEDS AND FEEDS FOR MATERIAL APPLICATIONS

HyperMill	Mold Mills Standard Length	Mold Mills Standard Length	Mold Mills Standard Length	Mold Mills Long Length	Mold Mills Long Length	Mold Mills Long Length	AxMill 2 Flute Standard Length	AxMill 2 Flute Long Length	AxMill 2 Flute Stub Length	AxMill 3 Flute Standard Length	AxMill 3 Flute Long Length	AxMill 3 Flute Stub Length
												
Uncoated	Uncoated	PowerA	PowerN	Uncoated	PowerA	PowerN	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated
428	440	440	440	440	440	440	414	415	416	420	421	422
Surface Feet Per Minute												
	165-230	330-460	460-650	100-140	200-275	280-390						
	165-230	330-460	460-650	100-140	200-275	280-390						
	115-165	230-330	325-460	70-100	140-200	200-280						
	115-165	230-330	325-460	70-100	140-200	200-280						
	85-115	165-230	230-325	50-70	100-140	140-200						
	50-100	100-200	140-280	40-75	60-120	85-170						
	50-100	100-200	140-280	40-75	60-120	85-170						
	50-100	100-200	140-280	40-75	60-120	85-170						
	50-100	130-250	140-280									
	85-165	165-330	230-460	60-120	100-200	140-280						
	70-100	135-200	190-280	50-75	80-120	115-170						
	50-85	100-165	140-230	40-70	60-100	85-140						
	85-150	165-300	230-460	60-110	100-180	140-250						
	100-165	200-330	280-460	75-120	120-200	170-280						
	85-115	165-230	190-280	60-85	100-140	140-200						
	70-100	135-200	190-280	50-75	80-120	115-170						
	115-200	230-400	325-560	70-145	140-240	200-340						
	85-115	165-230	230-325	60-85	100-140	140-200						
	50-70	100-135	140-190	40-50	60-80	85-115						
	115-200	230-400	325-560	70-145	140-240	200-340						
	70-115	135-230	190-325	50-70	80-140	115-200						
	50-100	100-200	140-280	40-75	60-120	85-170						
	200-400	400-800	560-1,100	145-290	240-480	340-670						
	325-400	650-800	900-1,100	235-290	390-480	550-675	800-1,000	800-1,000	800-1,000	800-1,000	800-1,000	800-1,000
	325-400	650-800	900-1,100	235-290	390-480	550-675	600-900	600-900	600-900	600-900	600-900	600-900
	70-115	135-230	190-325	50-70	80-140	115-200	425-560	425-560	425-560	425-560	425-560	425-560
							65-160	65-160	65-160	65-160	65-160	65-160
1,200-3,000							1,200-2,500	1,200-2,500	1,200-2,500	1,200-2,500	1,200-2,500	1,200-2,500
1,200-3,000							600-1,200	600-1,200	600-1,200	600-1,200	600-1,200	600-1,200
1,000 -2,500							500-800	500-800	500-800	500-800	500-800	500-800
330-1,500							300-600	300-600	300-600	300-600	300-600	300-600
650-2,000							650-2,000	650-2,000	650-2,000	650-2,000	650-2,000	650-2,000
300-900							300-900	300-900	300-900	300-900	300-900	300-900
							230-425	230-425	230-425	230-425	230-425	230-425

Technical Information

TECHNICAL INFORMATION FOR ULTRA ENDMILLS

Endmills	V4 Ultra	V4 Ultra	V5 Ultra	V5 Ultra	Hy5 Ultra	Hy5 Ultra	F45 Ultra	F45 Ultra
								
Series	PowerN 450, 452	PowerNR 451	PowerN 453, 455	PowerNR 454	PowerN 456, 458	PowerNR 457	PowerN 459, 461	PowerNR 460
Material Group	Surface Feet Per Minute							
1.1								
1.2								
1.3	540-700	330-425	540-700	330-425	540-700	330-425	540-700	330-425
1.4	540-700	330-425	540-700	330-425	540-700	330-425	540-700	330-425
1.5	340-550	200-330	340-550	200-330	340-550	200-330	340-550	200-330
1.6	175-350	85-150	175-350	85-150	175-350	85-150	175-350	85-150
1.7	175-350	85-150	175-350	85-150	175-350	85-150	175-350	85-150
1.8	175-350	85-150	175-350	85-150	175-350	85-150	175-350	85-150
1.9	125-250	70-125	125-250	70-125	125-250	70-125	125-250	70-125
2.1	340-1,100	200-660	340-1,100	200-660	340-1,100	200-660	340-1,100	200-660
2.2	270-800	160-480	270-800	160-480	270-800	160-480	270-800	160-480
2.3	225-400	135-240	225-400	135-240	225-400	135-240	225-400	135-240
2.4	200-270	120-160	200-270	120-160	200-270	120-160	200-270	120-160
3.1	445-700	170-570	445-700	170-570	445-700	170-570	445-700	170-570
3.2	350-600	145-450	350-600	145-450	350-600	145-450	350-600	145-450
3.3	310-445	120-360	310-445	120-360	310-445	120-360	310-445	120-360
3.4	210-350	90-270	210-350	90-270	210-350	90-270	210-350	90-270
4.1	550-875	160-330	550-875	160-330	550-875	160-330	550-875	160-330
4.2	350-540	80-270	350-540	80-270	350-540	80-270	350-540	80-270
4.3	175-270	105-165	175-270	105-165	175-270	105-165	175-270	105-165
5.1	540-900	325-540	540-900	325-540	540-900	325-540	540-900	325-540
5.2	270-550	160-330	270-550	160-330	270-550	160-330	270-550	160-330
5.3	175-450	105-370	175-450	105-370	175-450	105-370	175-450	105-370
6.1								
6.2								
6.3								
6.4								
7.1								
7.2								
7.3								
7.4								
8.1								
8.2								
8.3								
9.1								

TECHNICAL INFORMATION FOR AXMILLS

Suggested Axial/Radial Loads

Work Material	Type of Cut	Axial DOC	Radial DOC	Number of Flutes
Aluminum Alloys 2024, 6061, 7075	Slotting	1xD	1xD	2
	Roughing	1xD	.75xD	3
	Finishing	1.5xD	.01xD	3
High Silicon Aluminum A380, A390	Slotting	.5xD	1xD	3
	Roughing	1xD	.5xD	3
	Finishing	1.5xD	.01xD	3
Magnesium Alloys	Slotting	1xD	1xD	2
	Roughing	1xD	.75xD	3
	Finishing	1.5xD	.01xD	3
Copper Alloys, Brass, Bronze	Slotting	.75xD	1xD	2
	Roughing	1xD	.75xD	3
	Finishing	1.5xD	.01xD	3
Composites, Plastics, Fiberglass	Slotting	1xD	1xD	3
	Roughing	1xD	.75xD	3
	Finishing	1.5xD	.01xD	3

TECHNICAL INFORMATION FOR HP ROUTERS

	FGR	Nicked Trimmer CVD Diamond Coated	Herringbone Compression Finisher CVD Diamond Coated	Semi-Finisher CVD Diamond Coated	Multi-Flute Finisher CVD Diamond Coated
Material Group	Surface Feed per Minute				
CFRP, AFRP (Carbon Fiber, Aramid Fiber, Honeycomb Structures)		425-850	425-850	425-850	425-850
GFRP (Fiberglass)	650-1,000	425-850	425-850	425-850	
Carbon, Graphite	650-1,000	425-850	425-850	425-850	425-850
Metal Matrix		425-850		425-850	425-850
Plastics	800-1,650	425-850		425-850	425-850
Plastics	650-1,000	425-850	425-850	425-850	425-850
Carbon & Honeycomb		425-850	425-850		425-850

TECHNICAL INFORMATION FOR REAMERS

Carbide Reamer Feeds and Speeds

Material	Brinell	SFM	1/16"	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"
Carbon Steels 1018, 1020, 1040, 1080 1140, 1212, 12L15 1525, 1536	≤ 200	150	0.002	0.004	0.005	0.007	0.009	0.011	0.014
	>200	75	0.002	0.003	0.005	0.006	0.008	0.009	0.012
	≤ 300								
	>300	55	0.001	0.002	0.003	0.004	0.005	0.006	0.007
	≤ 420								
Alloy Steels 4140, 4150, 4320, 4340 5120, 5150, 8630, 86L20 50100, 52100	≤ 270	115	0.002	0.003	0.005	0.006	0.008	0.009	0.012
	>270	70	0.002	0.003	0.005	0.006	0.008	0.009	0.012
	≤ 370								
	>370	45	0.001	0.002	0.003	0.004	0.005	0.006	0.007
	≤ 450								
Tool Steels A2, D2, H13, L2, M2 P20, S7, T15, W2	≤ 250	40	0.001	0.002	0.003	0.004	0.005	0.006	0.008
	>250	25	0.001	0.001	0.002	0.003	0.003	0.004	0.005
	≤ 330								
	>330	20	0.000	0.001	0.001	0.002	0.002	0.002	0.003
	≤ 450								
Free Machining Stainless 303, 400 Series	≤ 250	75	0.001	0.002	0.003	0.004	0.005	0.006	0.008
	>250	55	0.001	0.002	0.002	0.003	0.004	0.005	0.006
	≤ 330								
Difficult Stainless 304, 316, 321, 15-5 PH, 17-4 PH Nitronic® 32	≤ 270	35	0.001	0.002	0.003	0.004	0.005	0.006	0.008
	>270	25	0.001	0.001	0.002	0.003	0.003	0.004	0.005
	≤ 370								
Cast Iron Gray, Malleable, Ductile	≤ 200	125	0.002	0.004	0.006	0.008	0.010	0.012	0.016
	>200	95	0.002	0.004	0.006	0.008	0.010	0.012	0.016
	≤ 330								
Titanium Ti-6Al4V, Ti-7Al4Mo Ti-5Al-5VMo-3Cr Ti-8Al1Mo1V	≤ 280	45	0.002	0.003	0.005	0.006	0.008	0.009	0.012
	>280	35	0.001	0.002	0.003	0.004	0.005	0.006	0.008
	≤ 350								
	>350	25	0.001	0.001	0.002	0.003	0.003	0.004	0.005
	≤ 440								
High Temp (Nickel) Alloys A-286, Hastelloy®, Incoloy®, Inconel®, Rene®, Waspaloy®	≤ 220	20	0.001	0.002	0.002	0.003	0.004	0.005	0.006
	>220	15	0.001	0.001	0.002	0.003	0.003	0.004	0.005
	≤ 330								
	>330	10	0.000	0.001	0.001	0.002	0.002	0.002	0.003
	≤ 420								
Copper Alloys Aluminum Bronze, C110 Aluminum 6061, 7075, 2017, 2024, 356	≤ 140	115	0.001	0.003	0.004	0.005	0.006	0.008	0.010
	≥ 140	95	0.001	0.003	0.004	0.005	0.006	0.008	0.010
	≤ 80	270	0.003	0.005	0.008	0.010	0.013	0.015	0.020
	≥ 80	230	0.003	0.005	0.008	0.010	0.013	0.015	0.020

TECHNICAL INFORMATION FOR HP DRILLS

Hurricane Drills Feeds and Speeds

Material	Rockwell Hardness "C"	SFM		Chip Load per Drill Diameter (Starting)				
		Solid	Coolant-Thru	1/8"-1/4"	1/4"-3/8"	3/8"-1/2"	1/2"-5/8"	5/8"-3/4"
Carbon Steels A-36, 12L14, SAE 1000, 1100,1300	<35	200	300	.0015-.0025	.0025 - .003	.003 - .0035	.0035 -.0045	.0045 -.0065
	>35	175	240	.0005 - .0015	.0015- .0025	.0025 - .003	.003 - .0035	.0035-.0045
Medium Alloy Steel 200, 250, 300, 8620	<35	200	300	.0015-.0025	.0025 - .003	.003 - .0035	.0035 -.0045	.0045 -.0065
	>35	175	240	.0005 - .0015	.0015- .0025	.0025 - .003	.003 - .0035	.0035-.0045
High Strength Alloy Steel 4140, 4340,5210,A2, D2P20, H11, H13, S2, O1	<35	200	300	.0015-.0025	.0025 - .003	.003 - .0035	.0035 -.0045	.0045 -.0065
	>35	175	240	.0005 - .0015	.0015- .0025	.0025 - .003	.003 - .0035	.0035-.0045
Cast Material Cast Steel Ductile Iron Gray iron		200	300	.0025 - .0035	.0035 -.0045	.0035 -.0045	.0045 -.0055	.0055 -.0075
		250	350	.0025 - .0035	.0035 -.0045	.0035 -.0045	.0045 -.0055	.0055 -.0075
		250	400	.0025 - .0035	.0035 -.0045	.0035 -.0045	.0045 -.0055	.0055 -.0075
Aluminum 2024, 6061-T6, 7075 Die Cast, Extrusions		300-400	300-600	.0035 -.0045	.0045-.0055	.0065- .0075	.0085- .0095	.0085- .0095
		250-300	300-500	.0025 - .0035	.0035 -.0045	.0055-.0065	.0075- .0085	.0075- .0085
Stainless Steels 200 Series, 300 Series	< 35	225	300	.0015-.0025	.0025 - .003	.003 - .0035	.0035-.0045	.004-.0055
	> 35	175	240	.0005-.0015	.0015-.002	.002-.0025	.0025- .0035	.0035-.0045
304L, 316L, Nitronic 50	< 35	125	175	.001-.0015	.0015-.002	.002-.003	.003 - .004	.004-.005
	> 35	75	100	.0005 - .001	.001-.0015	.0015 - .0025	.0025 - .0035	.0035 -.0045
400 Series (Martensitic)	< 35	225	300	.0015-.0025	.0025 - .003	.003 - .0035	.0035 -.0045	.004-.0055
	> 35	175	240	.0005 - .0015	.0015- .0025	.0025 - .003	.003 - .0035	.0035 -.0045
15/5, 17-4, (Precipitation)	> 35	225	30	.0015 - .0025	.0025 - .003	.003 - .0035	.0035 -.0045	.004-.005
Nickel Alloys Inconel, Waspalloy Rene, Hastalloy	< 35	175	250	.001- .002	.002-.003	.0025 - .0035	.003- .004	.0035-.0055
	> 35	125	200	.0005 - .0015	.0015- .0025	.002-.003	.0025 - .0035	.003- .0035
Cobalt Alloys Stellite, Haynes X-40	< 35	185	225	.001- .002	.002-.003	.0025- .0035	.003 - .004	.0035-.0055
	> 35	125	180	.0005- .0015	.0015- .0025	.002-.003	.0025- .0035	.003 - .0035
Titanium Alloys 6AL-4V, 6AJ-25N		225	300	.001- .002	.002-.003	.0025 - .0035	.003 - .004	.0035-.0055
Monel		150	225	.001- .002	.002-.003	.0025"- .0035	.003 - .004	.0035-.0055

TERMS AND CONDITIONS

To Order

Faxed or e-mailed orders are required. Please specify quantity and EDP/Part numbers.

Minimum Orders

\$50 for standard items, \$200 for special orders. Orders below \$50 are subject to a \$7.50 handling fee.

Standard Payment Terms

Overseas customers: Prepaid.

US customers: Net 30 Days, pending credit approval, past due after 30 days from billing date.

Freight

Freight is F.O.B. Origin. Mastercut Tool Corp. offers daily service with FedEx and UPS. Shipments made Pre-Pay & Add on Mastercut's FedEx or UPS accounts are subject to a \$2.50 handling fee for domestic shipments and a \$25.00 handling fee for international shipments. We are also happy to utilize any freight carrier when shipping on a collect or third-party account with no additional handling fee.

Return Policy

Standard items that Mastercut maintains in stock may be returned with a 25% restocking fee. All returns must be received within 2 months of original ship date in the original packaging. We are unable to accept returns on non-stock items or specials.


ADDITIONAL OFFERINGS

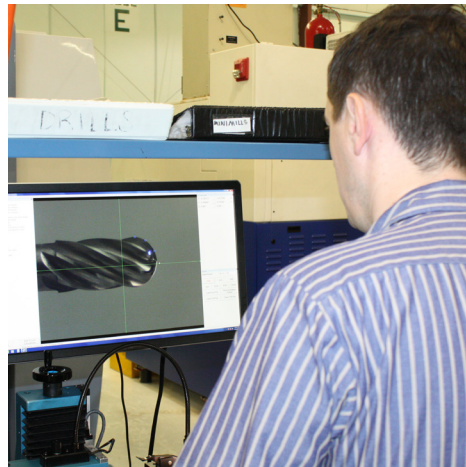
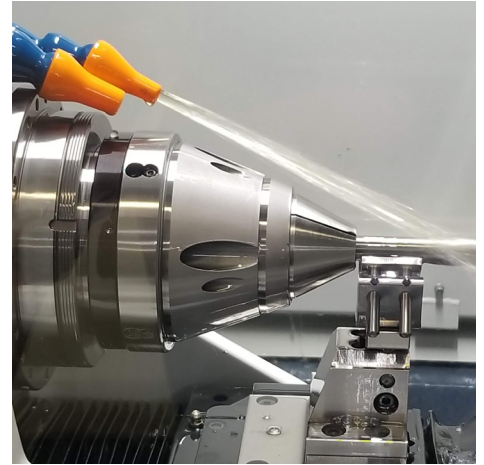
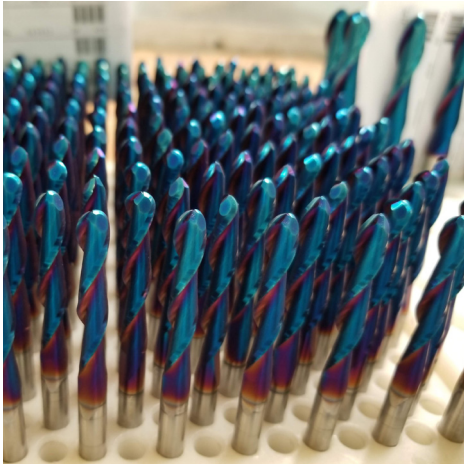
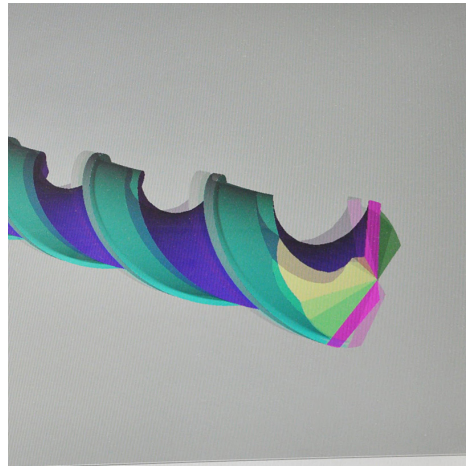
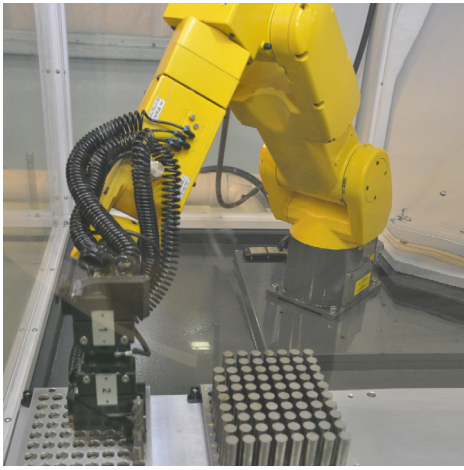
Special Tooling for your Requirements

When you need a non-standard tool for a specific job, give us a call. Requirements for special tooling or modifications of existing standard items will be given prompt, expert attention.

Resharpener

Mastercut Tool Corp. employs skilled craftsmen and advanced equipment to provide excellent resharpener services. We can sharpen dull cutters, regardless of the manufacturer. This is an excellent and efficient way to get new tool performance at a fraction of the cost.





Mastercut Tool Corp. - Corporate Headquarters
 965 Harbor Lake Dr.
 Safety Harbor, Florida 34695 USA
 Tel: (727) 726-5336
 Fax: (727) 725-2532

Mastercut Tool Corp. - European Warehouse
 Heliumstraat 8
 7463PL Rijssen
 Netherlands
 Tel: +31 404 002839

Email: sales@mastercuttool.com
Web: www.mastercuttool.com

Additional US Warehouses
located in Michigan and California





SOLID CARBIDE ENDMILLS



HIGH PERFORMANCE ENDMILLS

ULTRA PERFORMANCE



ROUTERS FOR WOOD, PLASTIC, AND FIBERGLASS

DRILLS, COUNTERSINKS

REAMERS



CARBIDE BURS - SOLID AND BRAZED SHANK



Mastercut Tool Corp. - Corporate Headquarters
 965 Harbor Lake Dr.
 Safety Harbor, Florida 34695 USA
 Tel: (727) 726-5336
 Fax: (727) 725-2532

Mastercut Tool Corp. - European Warehouse
 Heliumstraat 8
 7463PL Rijssen
 Netherlands
 Tel: +31 404 002839

Email: sales@mastercuttool.com
 Web: www.mastercuttool.com



Proudly Distributed By:

