

Distributed by

# SIMTEK®

## simturn® DX



SIMTEK Turning Tools Type DX (Delta-Line)

### Nutenstechen

Für allgemeines Nutenstechen und für Sicherungsringnuten.  
Geeignet ab Bohrungsdurchmesser 14,0mm, 16,0mm and 17,0mm.

### Grooving

For general Grooving as well as for Circlip Ring Grooving.  
For use in bores as of minimum bore diameter 14,0mm, 16,0mm and 17,0mm.

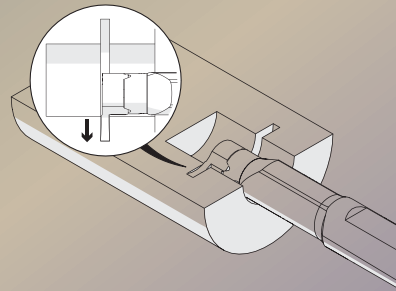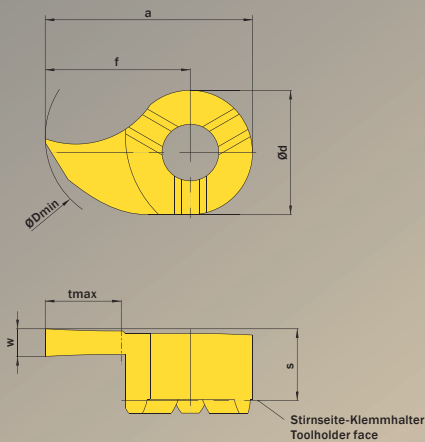

w <sup>+0,03</sup> mm	Nutzenbreite Nominal width of groove mm	ØDmin (Min. Bohrung) ØDmin (Min. Bore) mm	Artikelnummer Part number	Webcode www.simtek.eu/webcode	In Stock	a	Ød	f	S	tmax	Connectcode www.simtek.eu/code
						mm	mm	mm	mm	mm	
0,73	0,7	14,0	D14.0070.00 ZR/L	R AB83 L AMAH	●	13,5	9,0	9,0	5,3	1,2	D14
0,83	0,8	14,0	D14.0080.00 ZR/L	R AF8T L AMXS	●	13,5	9,0	9,0	5,3	1,3	D14
0,93	0,9	14,0	D14.0090.00 ZR/L	R AEAM L ADZA	●	13,5	9,0	9,0	5,3	1,5	D14
1,0	-	14,0	D14.0100.00 ZR/L	R APFC L AMY9	●	13,5	9,0	9,0	5,3	4,0	D14
1,2	1,1	14,0	D14.0110.00 GR/L	R AK84 L AM81	●	13,5	9,0	9,0	5,3	4,0	D14
1,4	1,3	14,0	D14.0130.00 GR/L	R ADGC L AAFB	●	13,5	9,0	9,0	5,3	4,0	D14
1,5	-	14,0	D14.0150.00 GR/L	R AK6Q L AAJG	●	13,5	9,0	9,0	5,3	4,0	D14
1,7	1,6	14,0	D14.0160.00 GR/L	R AJTA L AC77	●	13,5	9,0	9,0	5,3	4,0	D14
2,0	-	14,0	D14.0200.00 GR/L	R AG8N L AMW3	●	13,5	9,0	9,0	5,3	4,0	D14
2,5	-	14,0	D14.0250.00 GR/L	R AHSS L AA56	●	13,5	9,0	9,0	5,3	4,0	D14
3,0	-	14,0	D14.0300.00 GR/L	R AFFU L AHHA	●	13,5	9,0	9,0	5,3	4,0	D14
3,18	-	14,0	D14.0318.00 GR/L	R AKKN L APJD	●	13,5	9,0	9,0	5,3	4,0	D14
1,5	-	16,0	D14.0150.00.16 GR/L	R ANA2 L AG4U	●	15,0	9,0	10,5	5,2	5,5	D14
2,0	-	16,0	D14.0200.00.16 GR/L	R AAV5 L AKC6	●	15,0	9,0	10,5	5,2	5,5	D14
2,5	-	16,0	D14.0250.00.16 GR/L	R AN8C L AKHJ	●	15,0	9,0	10,5	5,2	5,5	D14
3,0	-	16,0	D14.0300.00.16 GR/L	R ANWY L ABDA	●	15,0	9,0	10,5	5,2	5,5	D14
1,5	-	17,0	D14.0150.00.17 GR/L	R AJDY L APPU	●	16,0	9,0	11,5	5,2	6,5	D14
2,0	-	17,0	D14.0200.00.17 GR/L	R AB9C L AH3A	●	16,0	9,0	11,5	5,2	6,5	D14
2,5	-	17,0	D14.0250.00.17 GR/L	R ANU2 L AFBS	●	16,0	9,0	11,5	5,2	6,5	D14
3,0	-	17,0	D14.0300.00.17 GR/L	R AATP L AHW1	●	16,0	9,0	11,5	5,2	6,5	D14


In Stock ● Left ● Right ● Both

## Klemmhalter, Innenbearbeitung


Schwingungsgedämpfter Hartmetall-Rundschaft mit innerer Kühlmittelzufuhr.

## Toolholder, For Internal Applications

Anti-Vibration Solid Carbide Round Shank Toolholder with through coolant

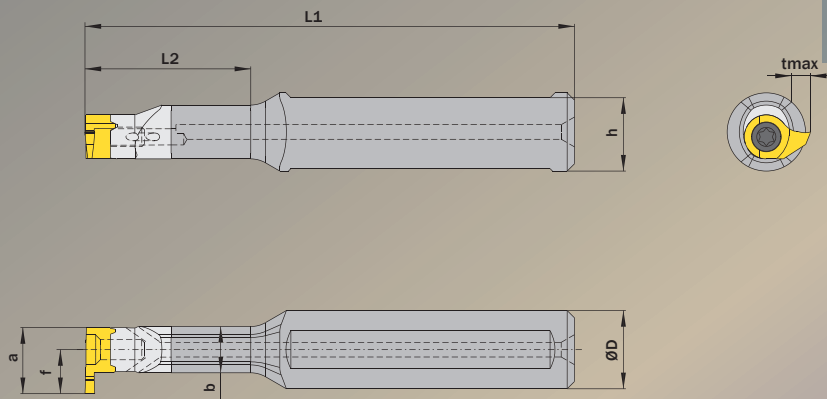

Maße „a“ und „f“ sind abhängig vom verwendeten Schneideinsatz.  
Dimensions „a“ and „f“ depend on used carbide inserts.



- ☑️ Hauptsächlich geeignet für diese Flächen  
Mainly designed for these Surfaces
- ☑️ Je nach Schneidplatte ebenfalls möglich  
Also possible depending on insert type

ØD h6	L2	Artikelnummer Part number	Webcode www.simtek.eu/webcode	In Stock	b	h	L1	tmax	Schraube Screw	Schraubenschlüssel Screw driver	Connectcode www.simtek.eu/code
mm	mm				mm	mm	mm	mm			
<b>▼ ØD = 12,0 mm</b>											
12,0	34,0	<b>D14.0012.34 HM</b>	AMQ7	☉	9,5	11,0	100,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
12,0	45,0	<b>D14.0012.45 HM</b>	AMYJ	☉	9,5	11,0	110,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
12,0	64,0	<b>D14.0012.64 HM</b>	AEQA	☉	9,5	11,0	130,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
<b>▼ ØD = 12,7 mm</b>											
12,7	34,0	<b>D14.0.500.34 HM</b>	AEBY	☉	9,5	11,0	100,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
12,7	45,0	<b>D14.0.500.45 HM</b>	AEZJ	☉	9,5	11,0	110,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
12,7	64,0	<b>D14.0.500.64 HM</b>	AAEN	☉	9,5	11,0	130,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
<b>▼ ØD = 15,875 mm</b>											
15,875	20,0	<b>D14.0.625.20 ST</b>	ADZ8	☉	9,5	15,0	100,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
15,875	34,0	<b>D14.0.625.34 HM</b>	AG7B	☉	9,5	15,0	100,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
15,875	45,0	<b>D14.0.625.45 HM</b>	AB11	☉	9,5	15,0	110,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
15,875	64,0	<b>D14.0.625.64 HM</b>	AAMU	☉	9,5	15,0	130,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
15,875	75,0	<b>D14.0.625.75 HM</b>	AEUU	☉	9,5	15,0	145,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
<b>▼ ØD = 16,0 mm</b>											
16,0	20,0	<b>D14.0016.20 ST</b>	ANP6	☉	9,5	15,0	100,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
16,0	34,0	<b>D14.0016.34 HM</b>	AFP8	☉	9,5	15,0	100,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
16,0	45,0	<b>D14.0016.45 HM</b>	AA1H	☉	9,5	15,0	110,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
16,0	64,0	<b>D14.0016.64 HM</b>	AB99	☉	9,5	15,0	130,0	6,5	D M4x12 T15F	T15F	<b>D14</b>
16,0	75,0	<b>D14.0016.75 HM</b>	AFD1	☉	9,5	15,0	145,0	6,5	D M4x12 T15F	T15F	<b>D14</b>